

# LiFePO4 Battery Pack

# **Specification**



Model No: HD12.8-8.0(12.8V8.0Ah)

Designed	Checked	Approved
Tian Gao	Yehao Han	Anson Zhao



### 1. Preface

This specification describes the type and size, performance, technical characteristics, warning and caution of the HD12.8-8.0(12.8V8.0Ah) LiFePO4 rechargeable battery pack. The specification only applies to HD12.8-8.0(12.8V8.0Ah) LiFePO4 rechargeable battery pack supplied by Haidi Energy Technology Co.,Ltd.

#### 2. Product and Model

- 2.1 Product: HD12.8-8.0(12.8V8.0Ah) LiFePO4 Battery Pack
- 2.2 System Configuration:

Standard pack:HD26650-3.2V-4000mAH-3.2V-4S2P



Charge/Discharge	Positive	UL1007 20AWG 100+10mm
	Negative	Connector:Molex-430250200



## 3. Battery Pack Specifications

Items	Standard	Comments	
Nominal voltage	12.8V	4S	
Typical capacity	8.0Ah	At 0.2C discharge rate	
Max continuous discharge current	5A		
Discharge cut-off voltage	About 10V		
Charge input voltage	14.6±0.05V	Charge mode: CC/CV, Use a constant	
Charge current	≤5A	current, constant voltage(CC/CV)	
Inner resistance	≤110mΩ	Between positive and negative polar	
Operation temperature range	Charge/ Discharge	0°C∼+45°C/-20°C∼+60°C	
	Discharge	When the environment temperature is higher than 45°C,please pay attention to ventilation and heat rejection.	
Storage temperature range	0°C~40°C (Capacity 80%)	Recommended long-term storage temperature is 15~25°C	
Humidity		5%≤RH≤85%	
Cabinet Material		PVC	
Total Weight		0.80±0.02Kg	
Size (L*W*H)	1	≤125*74*62mm	
Protection function	Over charge protection、Over discharge protection、Over current protection、Short circuit protection, Temperature protection.		

# 4. Standard Test Conditions

All test in this specification should be in standard atmospheric conditions: temperature:

25± 5°C, relative humidity: 65±20%.



#### 5. Characteristics

### 5.1 Standard charge

Charge the battery with the Battery special test cabinet, supply 14.6 voltage, constant-current 0.2C(A) current until current down to 0.02C (A).

### 5.2 Standard discharge


Discharge the battery at 0.2C (A) to 10V or battery cut off voltage.

### 5.3 Electrical Performance

Test Items	Test Methods	Test Standards
Capacity retention rate	After standard charge under specified conditions, store the cells for 28 days, then discharge at 0.2C (A) to cut-off voltage.	Capacity retention rate≥80%
Cycle Life	<ol> <li>Standard charge at 0.2C (A) ,</li> <li>Rest 0.5~1 h</li> <li>Discharge at 0.2C to cut off voltage</li> <li>Capacity retention rate≥80%</li> </ol>	>2000cycles @ 100% DOD; >3000cycles @ 90% DOD; >4000cycles @ 80% DOD;



#### **6.Characteristics Curve**

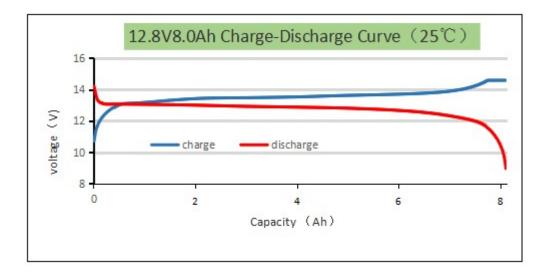

#### 7. Cautions

7.1 Charging current should not be more than maximum charge current specified in the Product Specification, Charging current bigger than recommended current may damage the battery;

7.2 Discharging current should be no more than maximum discharge current specified in the Product Specification; Discharging current bigger than recommended discharge current may damage the battery;

- 7.3 It should be noted that the cell would be possible to be at a over-discharged state by its self-discharge characteristics in case the cell is not used for long time. In order to prevent over-discharging, the cell shall be charged periodically to maintain between 13.2V and 13.6V (Recommended 3 months one cycle) .Over-discharging may causes loss of cell performance, characteristics, or battery functions;
- 7.4 Please charge the battery within 12 hours after use;
- 7.5 Battery storage environment follow the above conditions and in standard atmosphere, should be without strong magnet, no power, no static;
- 7.6 Do not reverse the polarity of the battery pack for any reason;
- 7.7 Do not short circuit the battery pack;
- 7.8 Do not reverse polarity charging;
- 7.9 Battery packs can be combined in series or in parallel according to the specification;



- 7.10 Do not immerse the battery pack in water or sea water, or get it wet;
- 7.11 Do not disassemble battery;
- 7.12 Do not expose the battery to extreme heat or flame;
- 7.13 Please use a compatible charger for charging;