

Ordering number : EN5914

CMOS IC

SANYO**LC75396NE****Single-Chip Electronic Volume Control System****Overview**

The LC75396NE is an electronic volume control system providing control over volume, balance, 5-band equalizer, and input switching based on serial inputs.

Functions


- **Volume control:**
The chip provides 81 levels of volume attenuation: in 1-dB step between 0 dB and -79 dB and $-\infty$. Independent control over left front/rear and right front/rear channels provides balance control.
- **Equalizer:**
The chip provides control in 2-dB steps over the range between +10 dB and -10 dB. Four of the five bands have peaking equalization; the remaining one, shelving equalization.
- **Selector:**
The left and right channels each offer a choice of five inputs. The L5 and R5 inputs can be turned on and off independently. An external constant determines the amplification for the input signal.
- **Serial data input**
— Supports CCB* format communication with the system controller.

Features

- Built-in buffer amplifiers reduce the number of external parts required.
- Silicon gate CMOS process reduces the noise of built-in switch.
- $V_{DD}/2$ reference voltage generation circuit built in.

Package Dimensions

unit: mm

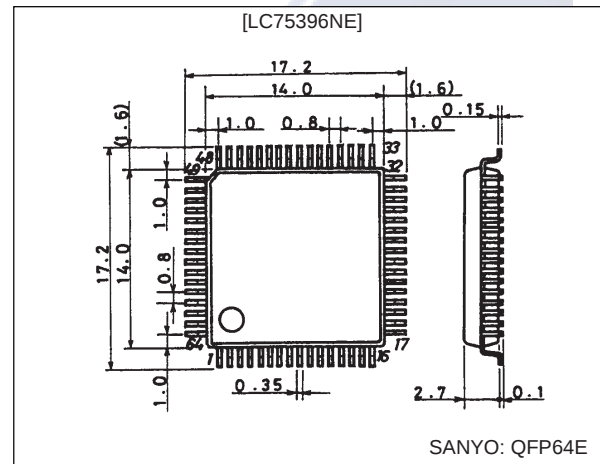3159-QFP64E**Specifications****Absolute Maximum Ratings at $T_a = 25^\circ\text{C}$, $V_{SS} = 0\text{ V}$**

Parameter	Symbol	Conditions	Ratings	Unit
Maximum supply voltage	$V_{DD\text{ max}}$	V_{DD}	11	V
Maximum input voltage	$V_{IN\text{ max}}$	CL, DI, CE, L1 to L5, R1 to R5, LTIN, RTIN, LFIN, RFIN, LRIN, RRIN	$V_{SS} - 0.3$ to $V_{DD} + 0.3$	V
Allowable power dissipation	$P_d\text{ max}$	$T_a \leq 75^\circ\text{C}$, with PC board	550	mW
Operating temperature	T_{opr}		-30 to +75	$^\circ\text{C}$
Storage temperature	T_{stg}		-40 to +125	$^\circ\text{C}$

- CCB is a trademark of SANYO ELECTRIC CO., LTD.
- CCB is SANYO's original bus format and all the bus addresses are controlled by SANYO.

SANYO Electric Co.,Ltd. Semiconductor Bussiness Headquarters

TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110-8534 JAPAN

50698RM (OT) No. 5914-1/19

LC75396NE

Allowable Operating Ranges at $T_a = -30$ to $+75^\circ\text{C}$, $V_{SS} = 0\text{ V}$

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Supply voltage	V_{DD}	V_{DD}	6.0		10.5	V
Input high level voltage	V_{IH}	CL, DI, CE	4.0		V_{DD}	V
Input low level voltage	V_{IL}	CL, DI, CE	V_{SS}		1.0	V
Input voltage amplitude	V_{IN}	CL, DI, CE, L1 to L5, R1 to R5, LTIN, RTIN, LFIN, RFIN, LRIN, RRIN	V_{SS}		V_{DD}	Vp-p
Input pulse width	t_{pW}	CL	1.0			μs
Setup time	t_{SETUP}	CL, DI, CE	1.0			μs
Hold time	t_{HOLD}	CL, DI, CE	1.0			μs
Operating frequency	f_{opg}	CL			500	kHz

Electrical Characteristics at $T_a = 25^\circ\text{C}$, $V_{DD} = 10\text{ V}$, $V_{SS} = 0\text{ V}$

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
[Input block]						
Input resistance	R _{in}	L1 to L5, R1 to R5		50		kΩ
Clipping level	V _{cl}	LSELO, RSELO: THD = 1.0%		3.00		V _{rms}
Output load resistance	R _L	LSELO, RSELO	10			kΩ
[Volume control block]						
Input resistance	R _{in}	LFIN, LRIN, RFIN, RRIN		100		kΩ
[Equalizer control block]						
Control range	G _{eq}	Max, boost/cut	±8	±10	±12	dB
Step resolution	E _{step}		1	2	3	dB
Internal feedback resistance	R _{feed}		17	28	39	kΩ
[Overall characteristics]						
Total harmonic distortion	THD	V _{IN} = 1 V _{rms} , f = 1 kHz, with all controls flat overall			0.01	%
Crosstalk	CT	V _{IN} = 1 V _{rms} , f = 1 kHz, with all controls flat overall, R _g = 1 kΩ	80			dB
Output noise voltage	V _N 1	With all controls flat overall, BW = 20 to 20kHz		2.9		μV
	V _N 2	GEQ F1 Band = +10dB, With all controls overall, BW = 20 to 20kHz		17		μV
Output at maximum attenuation	V _O min	V _{IN} = 1 V _{rms} , f = 1 kHz, main volume –∞		–90		dB
Current drain	I _{DD}	V _{DD} – V _{SS} = 10.5 V		46.5	55.8	mA
Input high level current	I _{IH}	CL, DI, CE, V _{IN} = 10.5 V			10	μA
Input low level current	I _{IL}	CL, DI, CE, V _{IN} = 0 V	–10			μA


A08835



LC75396NE


Test Circuits

Total Harmonic Distortion

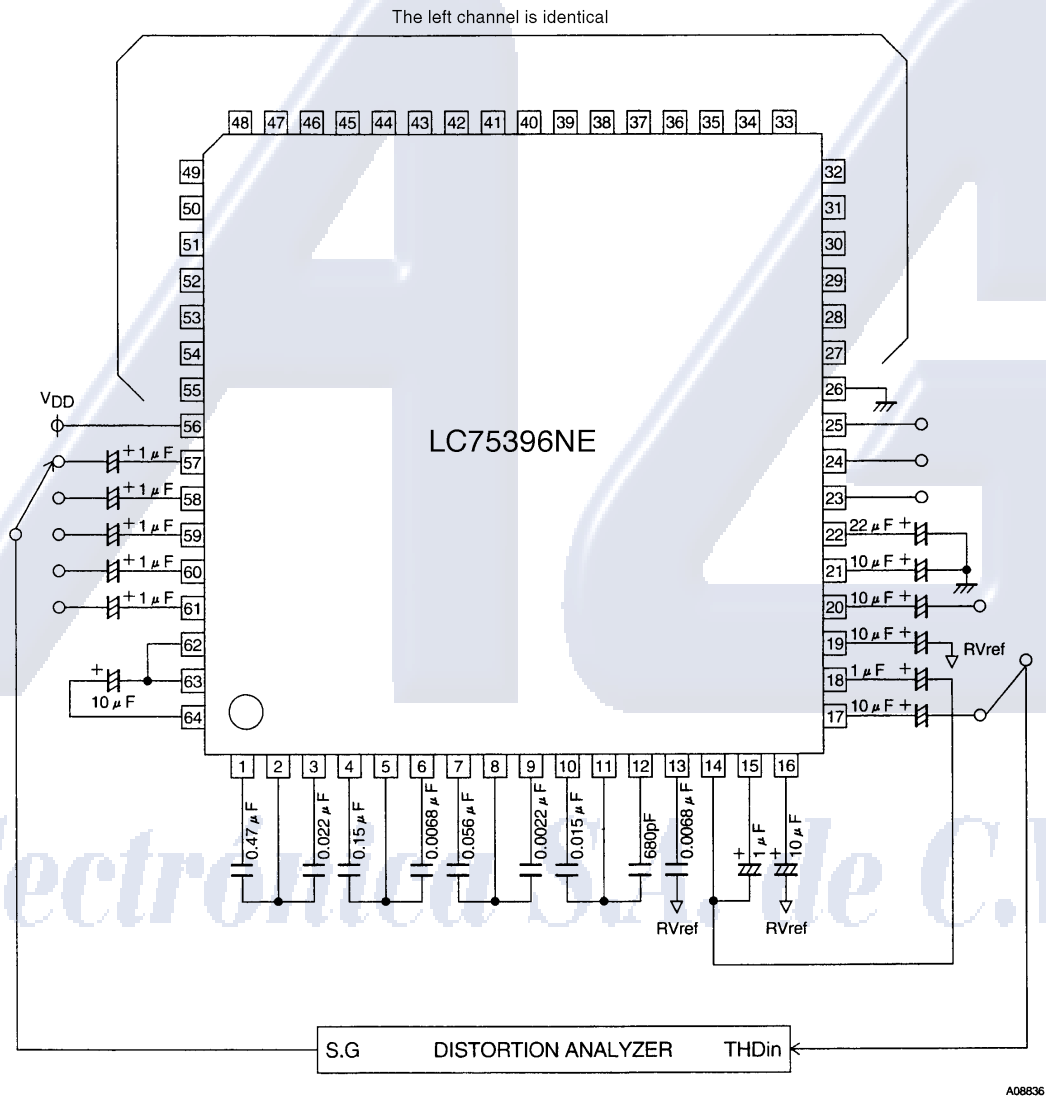


LC75396NE

Output Noise Voltage

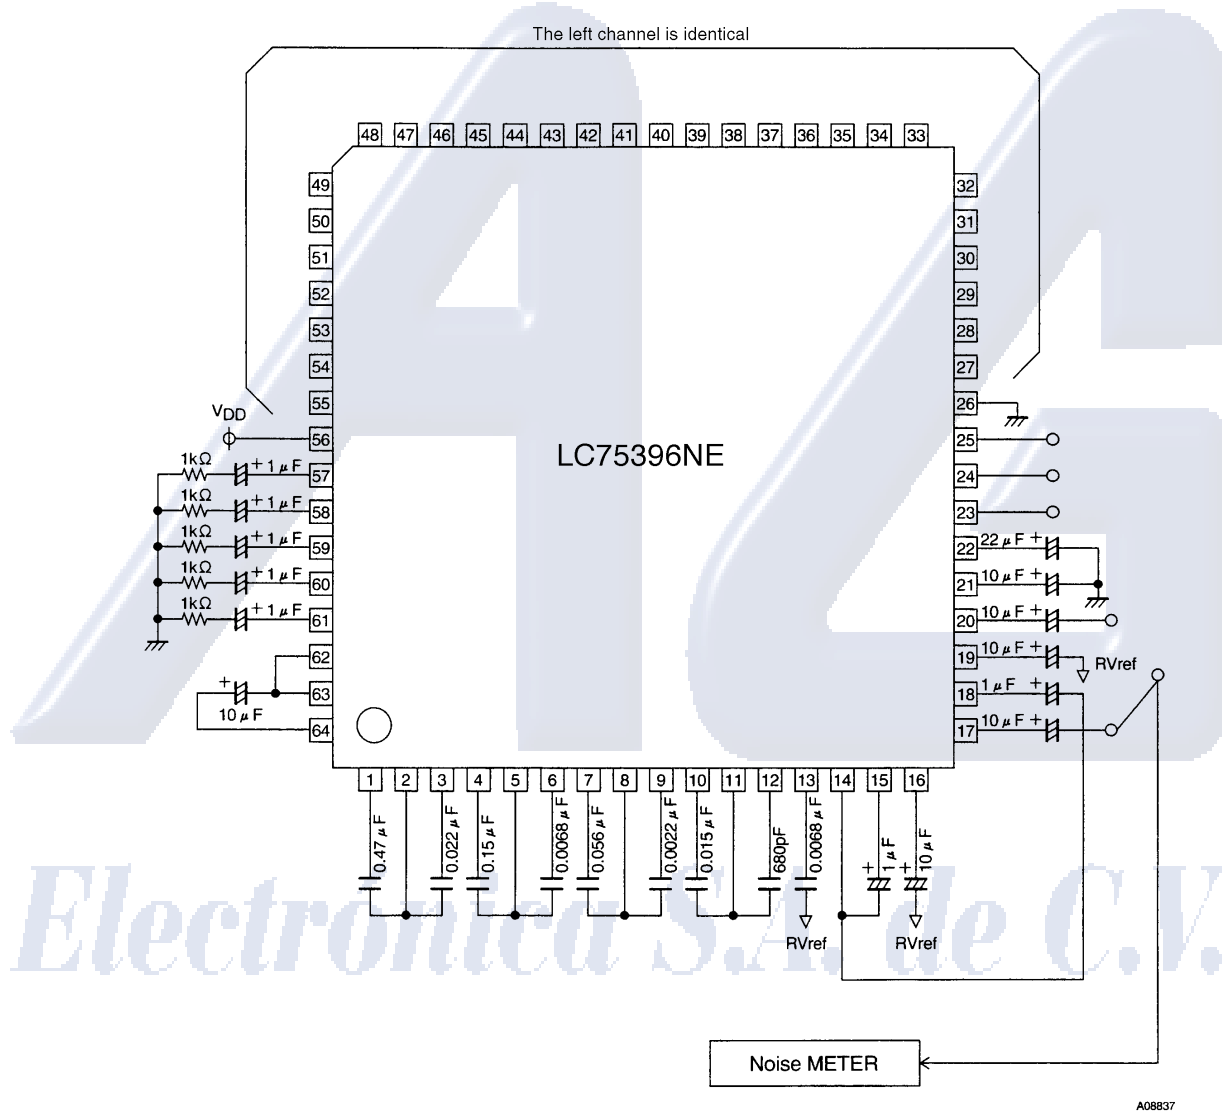


Crosstalk

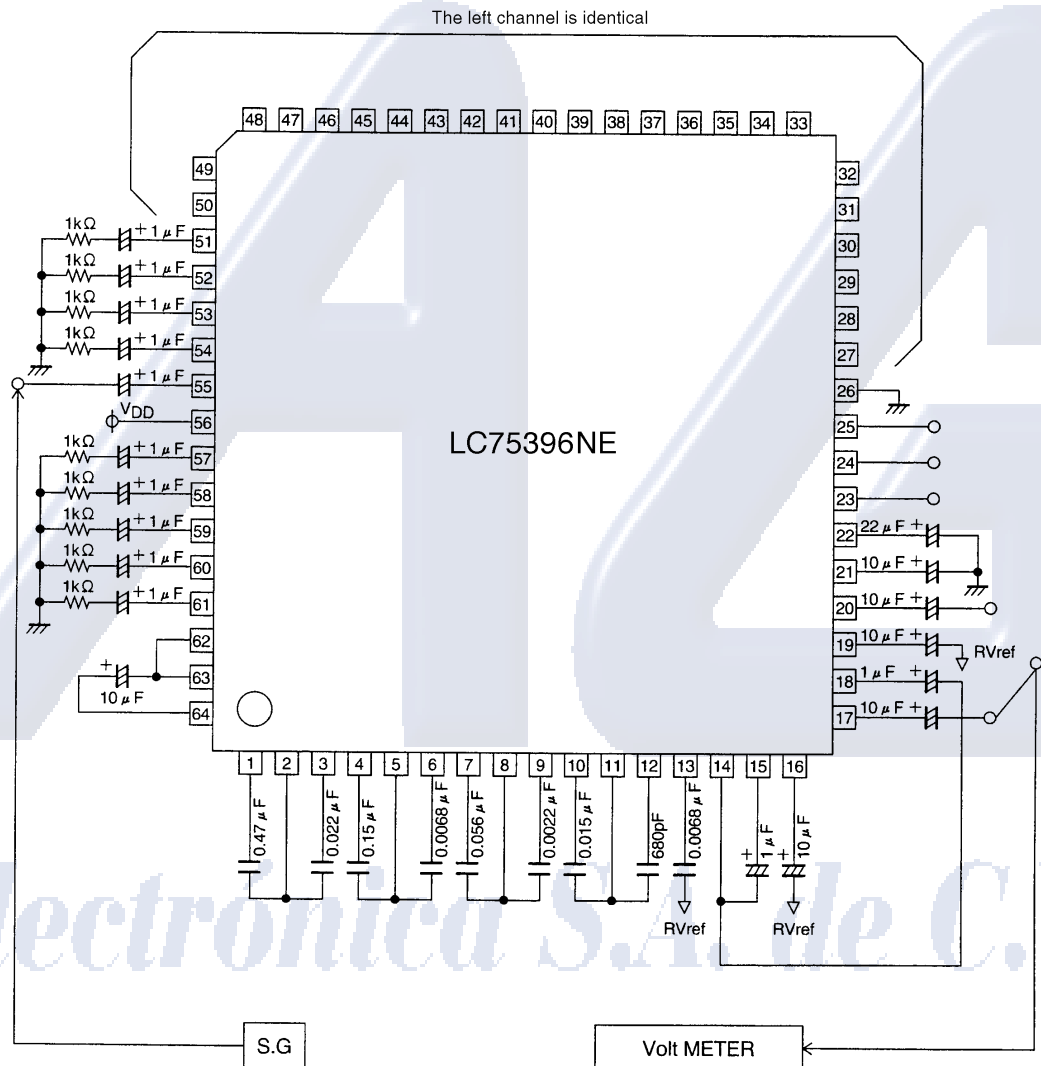

A08838

LC75396NE

Pin Assignment

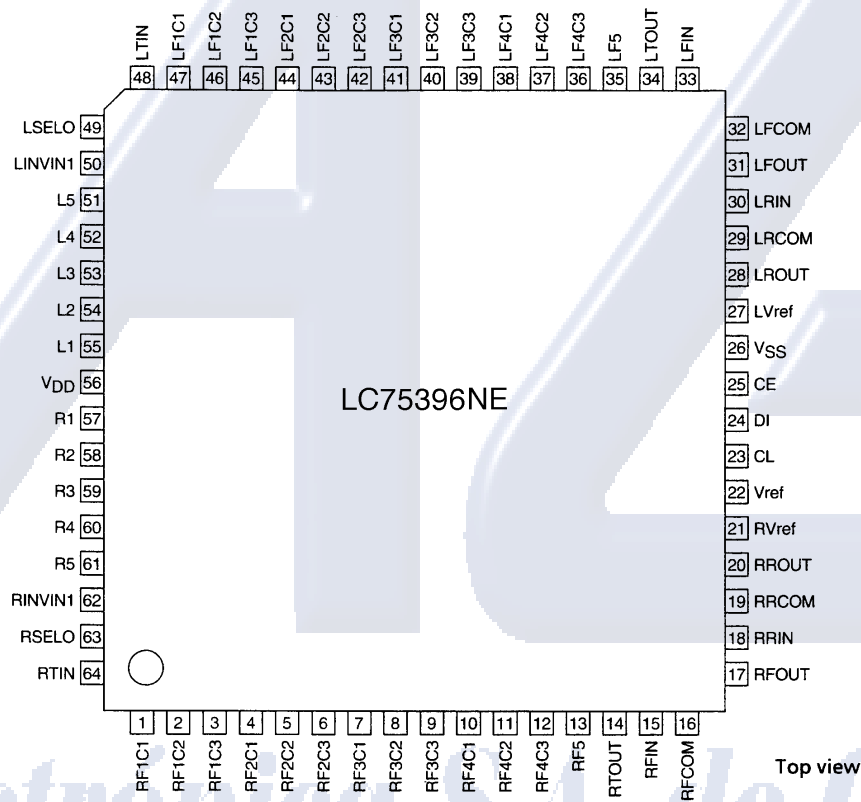

A08839

LC75396NE








Pin Functions

Pin No.	Pin	Function	Equivalent circuit
55 54 53 52 51 57 58 59 60 61	L1 L2 L3 L4 L5 R1 R2 R3 R4 R5	Signal inputs	A08840
50 62	LINVIN1 RINVIN1	Inverting inputs to the operational amplifier that sets the input gain	A08841
49 63	LSELO RSELO	Input selector outputs	A08842
48 64	LTIN RTIN	Equalizer inputs	A08843
47 46 45 1 2 3	LF1C1 LF1C2 LF1C3 RF1C1 RF1C2 RF1C3	- Connections for the capacitors that form the equalizer F1 band filters - Capacitors must be connected between: LF1C1 (RF1C1) and LF1C2 (RF1C2), and between LF1C2 (RF1C2) and LF1C3 (RF1C3).	A08844
44 43 42 4 5 6	LF2C1 LF2C2 LF2C3 RF2C1 RF2C2 RF2C3	- Connections for the capacitors that form the equalizer F2 band filters - Capacitors must be connected between: LF2C1 (RF2C1) and LF2C2 (RF2C2), and between LF2C2 (RF2C2) and LF2C3 (RF2C3).	
41 40 39 7 8 9	LF3C1 LF3C2 LF3C3 RF3C1 RF3C2 RF3C3	- Connections for the capacitors that form the equalizer F3 band filters - Capacitors must be connected between: LF3C1 (RF3C1) and LF3C2 (RF3C2), and between LF3C2 (RF3C2) and LF3C3 (RF3C3).	
38 37 36 10 11 12	LF4C1 LF4C2 LF4C3 RF4C1 RF4C2 RF4C3	- Connections for the capacitors that form the equalizer F4 band filters - Capacitors must be connected between: LF4C1 (RF4C1) and LF4C2 (RF4C2), and between LF4C2 (RF4C2) and LF4C3 (RF4C3).	


Continued on next page.

LC75396NE

Continued from preceding page.

Pin No.	Pin	Function	Equivalent circuit
35 13	LF5 RF5	- Connections for the capacitors that form the equalizer F5 band filters - Connections for external capacitors	 A08845
33 30 15 18	LFIN LRIN RFIN RRIN	- Input to the left channel front 4-dB step volume control. - Input to the left channel rear 4-dB step volume control. - Input to the right channel front 4-dB step volume control. - Input to the right channel rear 4-dB step volume control.	 A08846
32 29 16 19	LFCOM LRCOM RFCOM RRCOM	- Common pin for the left channel front 1-dB step volume control. - Common pin for the left channel rear 1-dB step volume control. - Common pin for the right channel front 1-dB step volume control. - Common pin for the right channel rear 1-dB step volume control.	
31 28 17 20	LFOUT LROUT RFOUT RROUT	- Left channel front volume control output - Left channel rear volume control output - Right channel front volume control output - Right channel rear volume control output	 A08847
34 14	LTOUT RTOUT	Equalizer outputs	 A08848
22	Vref	A capacitor of a few tens of μF must be inserted between Vref and AV_{SS} (V_{SS}) to handle power supply ripple in the $\text{V}_{\text{DD}}/2$ voltage generation circuit.	 A08849
27 21	LVref RVref	Internal analog system grounds	 A08850
56	V_{DD}	Power supply	
26	V_{SS}	Ground	
25	CE	- Chip enable - When this pin goes from high to low, data is written to an internal latch and the analog switches operate. Data transfers are enabled when this pin is at the high level.	 A08851
24 23	DI CL	Serial data and clock inputs for chip control.	

Selector Control Block



A08852


Right channel same as left

A08853

Electrónica S.A. de C.V.

LC75396NE

Volume Control Block

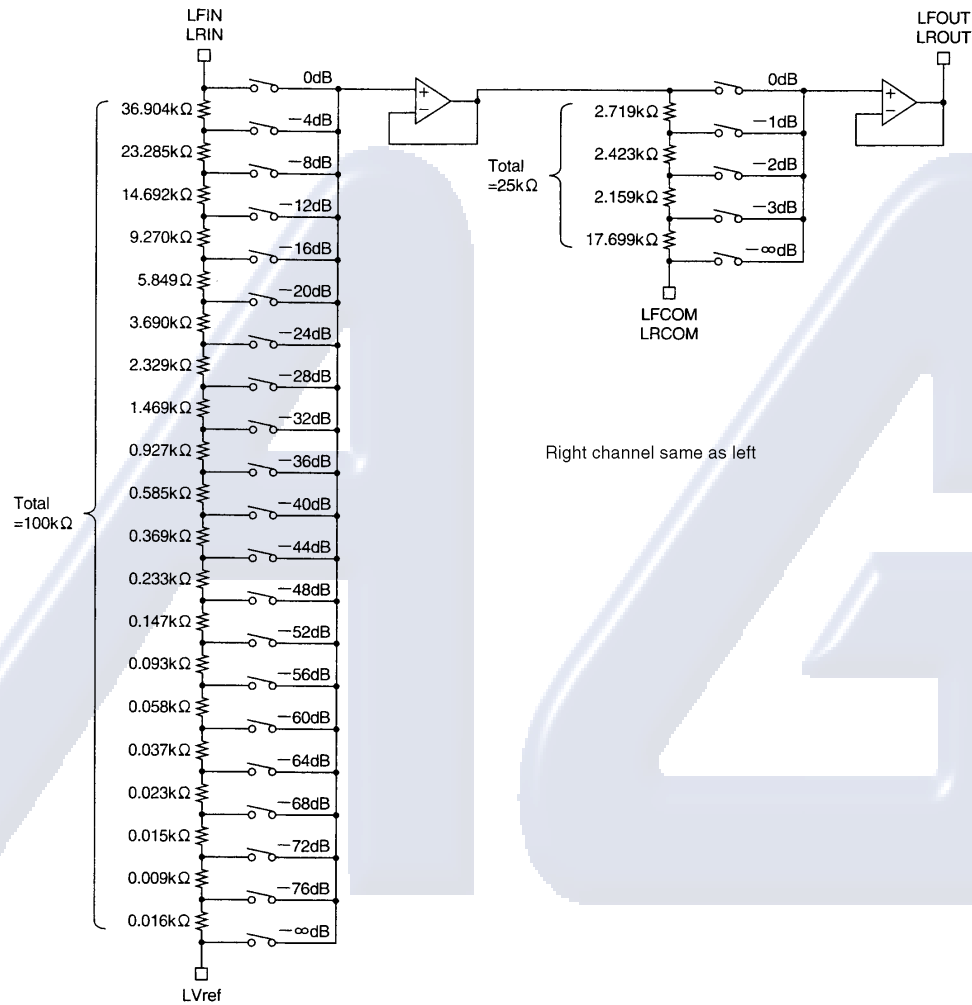


Calculating the Size of External Capacitors

The LC75396NE supports four bands with peaking characteristics and one band with shelving characteristics

1. Peaking Characteristics (bands F1 to F4)

The external capacitor functions as the structural element of a simulated inductor. The equivalent circuit and the calculations required to achieve the desired center frequency are shown below.

- Equivalent circuit for the simulated inductor

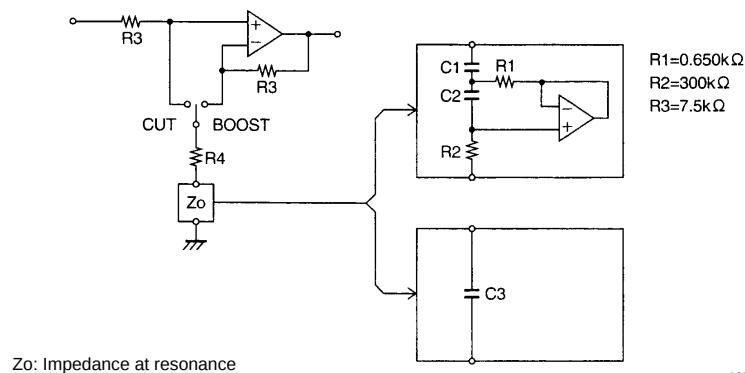

A08855

LC75396NE

- Calculation example

Specifications: Central frequency, $F_O = 107 \text{ Hz}$

Q factor at maximum boost, $Q_{+10 \text{ dB}} = 0.8$

- Calculate Q_O , the sharpness of the simulated inductance itself.

$$Q_O = (R1 + R4)/R1 \times Q_{+10 \text{ dB}} \neq 4.270$$

Note: R4 is from the separately issued internal block diagram.

- Calculate C1

$$C1 = 1/2\pi F_O R1 Q_O \neq 0.536 \text{ (}\mu\text{F)}$$

- Calculate C2

$$C2 = Q_O/2\pi F_O R2 \neq 0.021 \text{ (}\mu\text{F)}$$

- Sample results


Central frequency F_O (Hz)	C1 (F)	C2 (F)
107	0.536 μ	0.021 μ
340	0.169 μ	6663 μ
1070	0.054 μ	2117 μ
3400	0.017 μ	666 μ

2. Shelving characteristics (Band F5)

Achieving the desired control of 2-dB steps over the range between +10 dB to -10 dB requires choosing a capacitor, C3, with an impedance of 650 Ω .

Control System Timing and Data Formats

To control the LC75396NE, specified sequences are required to be input through the pins CE, CL, and DI. Each sequence consists of 48 bits: an 8-bit address followed by 40 bits of data.

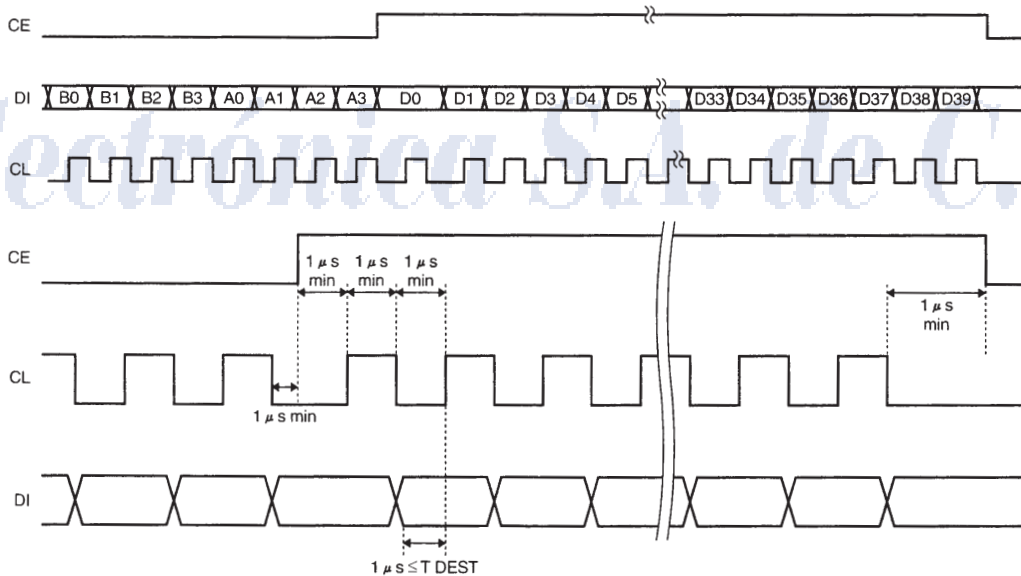

A08856

LC75396NE

1. Address Code (B0 to A3)

This product uses an 8-bit address code, and supports the same specifications as other Sanyo CCB serial bus products.

Address code (LSB)

B0	B1	B2	B3	A0	A1	A2	A3
0	1	0	0	0	0	0	1

(82HEX)

2. Control Code Allocations

Input switching control

D0	D1	D2	Operation	
0	0	0	L1 (R1)	ON
1	0	0	L2 (R2)	ON
0	1	0	L3 (R3)	ON
1	1	0	L4 (R4)	ON
0	0	1		OFF
1	0	1		OFF
0	1	1		OFF
1	1	1		OFF

Input switching control

D3	Operation	
0	L5 (R5)	OFF
1	L5 (R5)	ON

Five band equalizer control

D4	D5	D6	D7	Band f1
D8	D9	D10	D11	Band f2
D12	D13	D14	D15	Band f3
D16	D17	D18	D19	Band f4
D20	D21	D22	D23	Band f5
1	0	1	0	+10dB
0	0	1	0	+8dB
1	1	0	0	+6dB
0	1	0	0	+4dB
1	0	0	0	+2dB
0	0	0	0	0dB
1	0	0	1	-2dB
0	1	0	1	-4dB
1	1	0	1	-6dB
0	0	1	1	-8dB
1	0	1	1	-10dB

LC75396NE

Volume control

D24	D25	D26	D27	D28	D29	D30	D31	Operation
								1dB STEP
0	0							0dB
1	0							-1dB
0	1							-2dB
1	1							-3dB
								4dB STEP
		0	0	0	0	0	0	0dB
		1	0	0	0	0	0	-4dB
		0	1	0	0	0	0	-8dB
		1	1	0	0	0	0	-12dB
		0	0	1	0	0	0	-16dB
		1	0	1	0	0	0	-20dB
		0	1	1	0	0	0	-24dB
		1	1	1	0	0	0	-28dB
		0	0	0	1	0	0	-32dB
		1	0	0	1	0	0	-36dB
		0	1	0	1	0	0	-40dB
		1	1	0	1	0	0	-44dB
		0	0	1	1	0	0	-48dB
		1	0	1	1	0	0	-52dB
		0	1	1	1	0	0	-56dB
		1	1	1	1	0	0	-60dB
		0	0	0	0	1	0	-64dB
		1	0	0	0	1	0	-68dB
		0	1	0	0	1	0	-72dB
		1	1	0	0	1	0	-76dB
								MUTE
		1	1	1	1	1	0	-∞

Channel selection control

D32	D33	Operation
0	0	Initial setting
1	0	RCH
0	1	LCH
1	1	Simultaneous left and right

Left channel volume rear/front control

D34	Operation
0	Rear
1	Front

Control is enabled when D33 = 1

Right channel volume rear/front control

D35	Operation
0	Rear
1	Front

Control is enabled when D32 = 1

Test mode control

D36	D37	D38	D39	Operation
0	0	0	0	These bits are for chip testing and must all be set to 0 in application systems.

Notes: After power is first applied, applications must initialize this chip by sending the initial data (1) and (2) described below.

Initial data ... (1) Address 01000001


Data: (Set the volume to -∞ set both D34 and D35 to 1, and set all other data to 0)

(2) Address 01000001


Data: (Set the volume to -∞, set both D34 and D35 to 0, and set all other data to 0)

After transferring that data, set the left and right channel initial settings before turning off the mute function.




LC75396NE

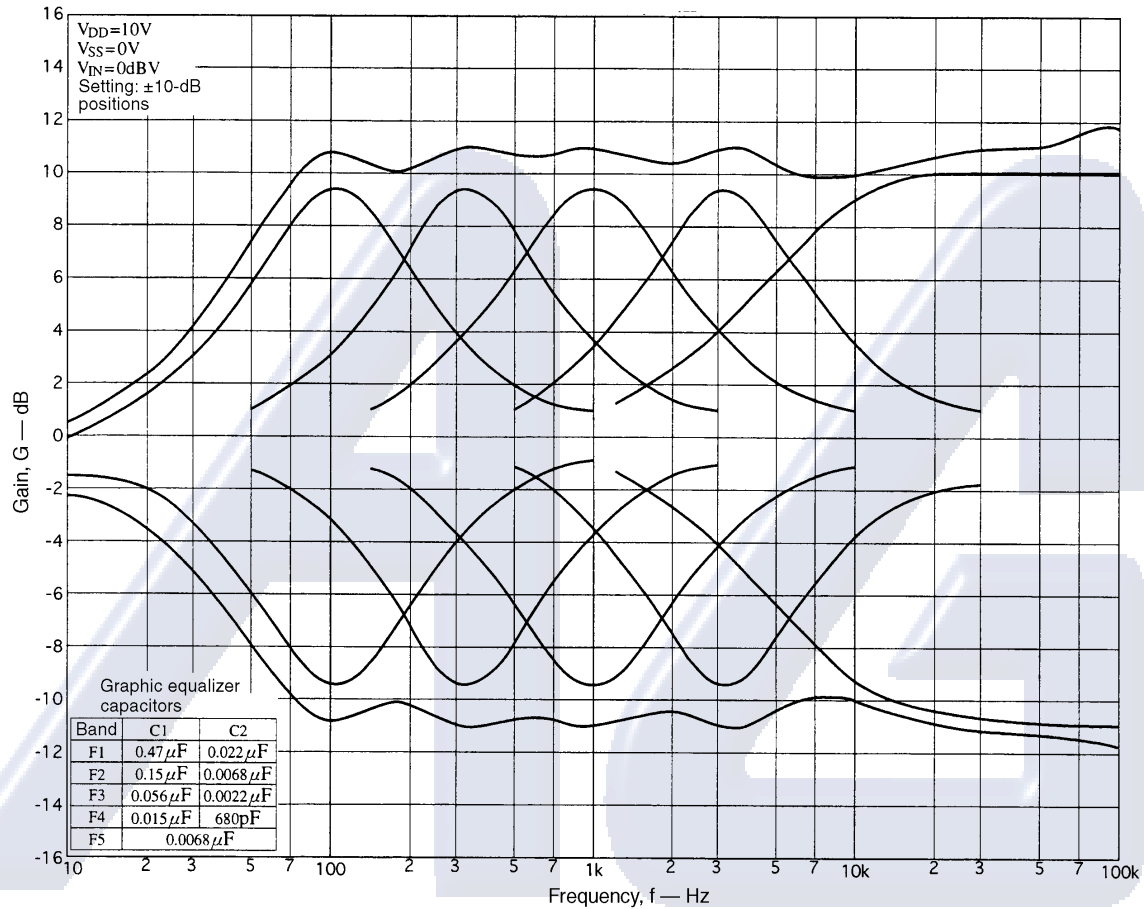 f_0 (Center Frequency) Characteristics

Volume Step Characteristics


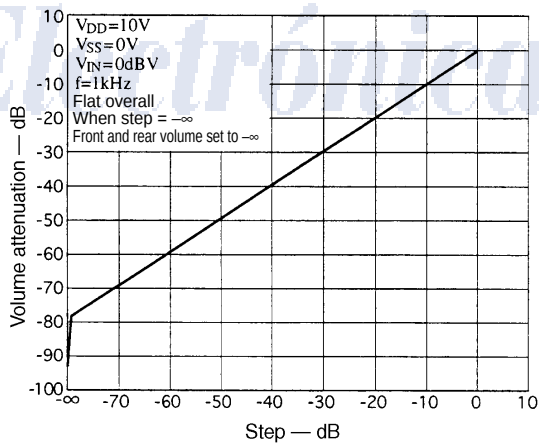


THD — Frequency Characteristics (1)

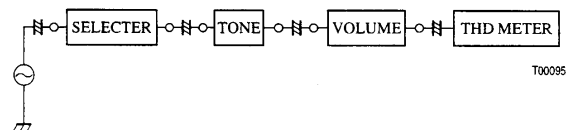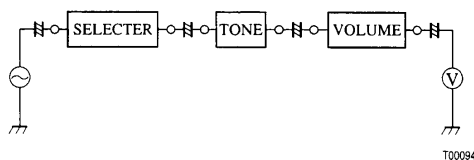
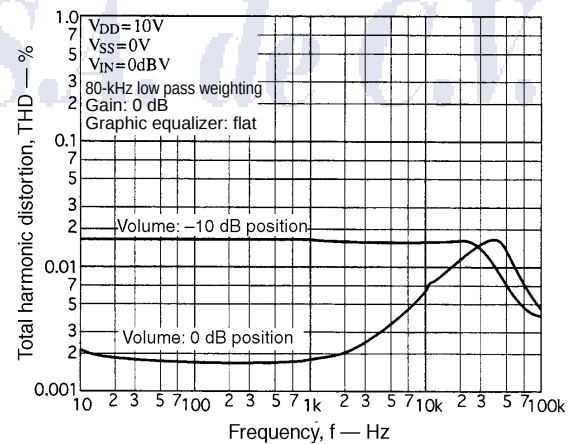


LC75396NE



THD – Frequency Characteristics (2)

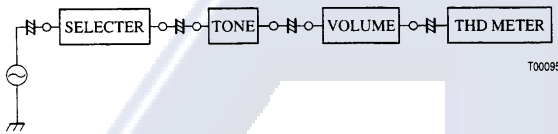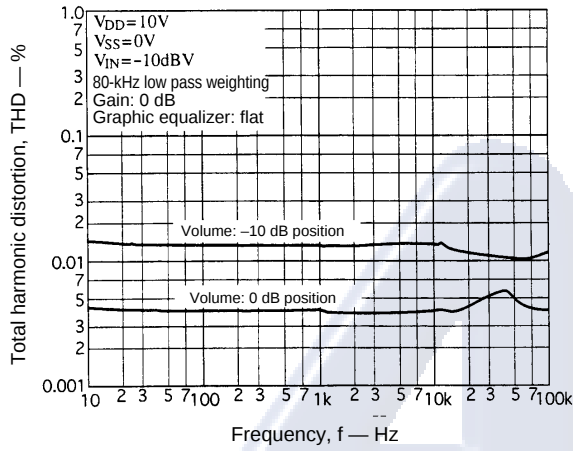



THD – Frequency Characteristics (3)

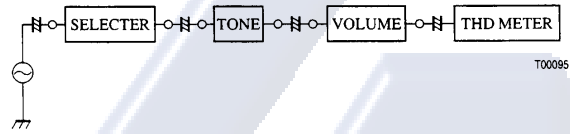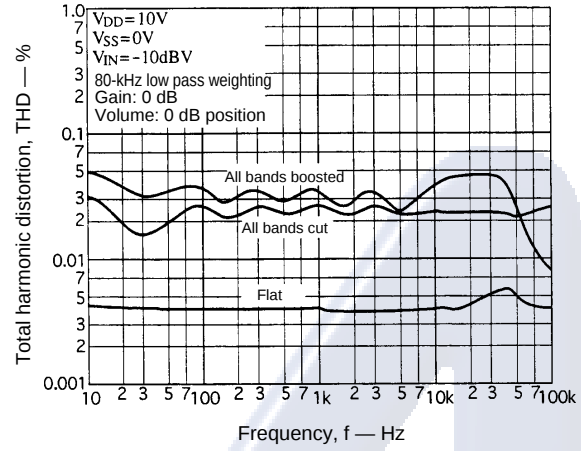

THD – Supply Voltage Characteristics (1)

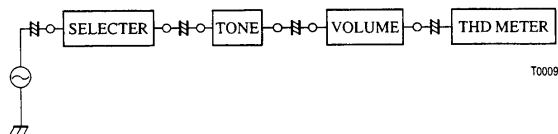
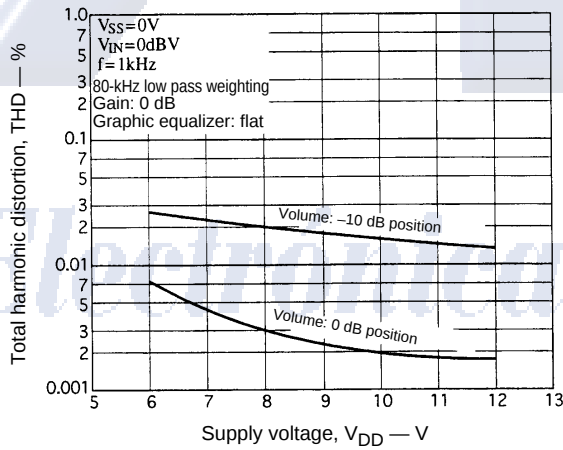


THD – Supply Voltage Characteristics (1)

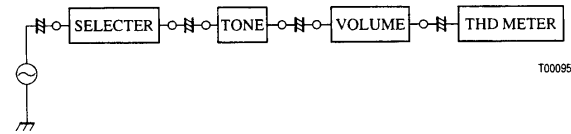
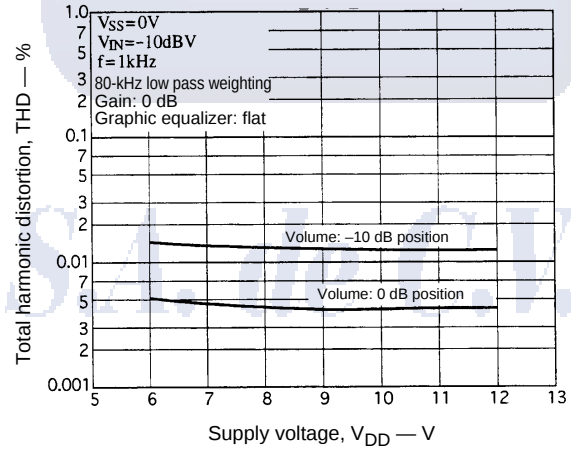


LC75396NE



THD – Supply Voltage Characteristics (3)

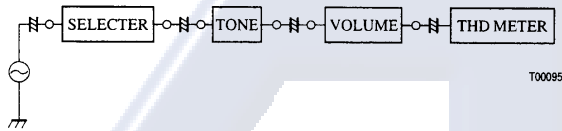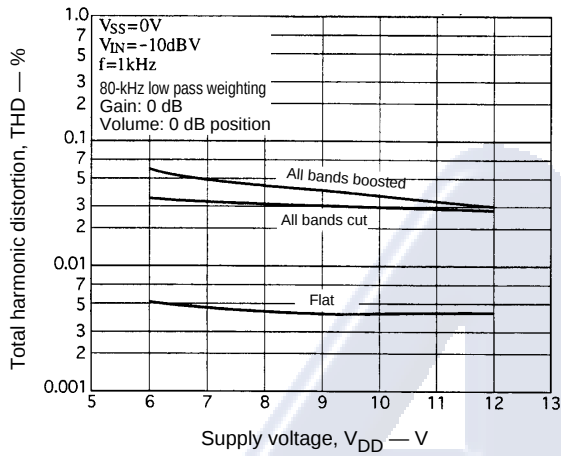



THD – Input Level Characteristics (1)

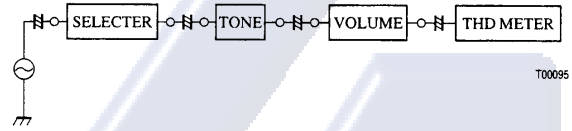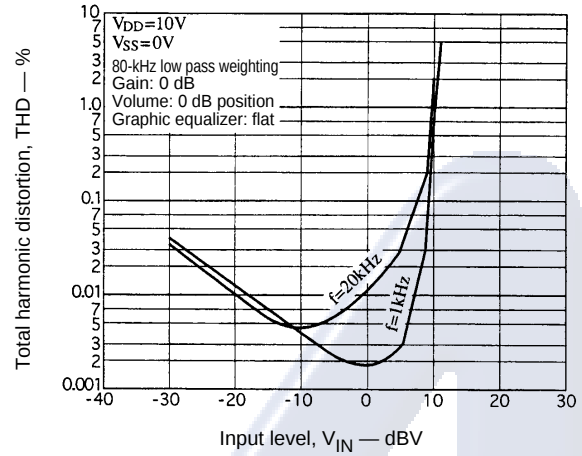

THD – Input Level Characteristics (2)

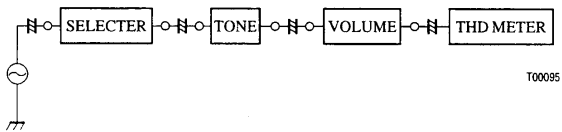
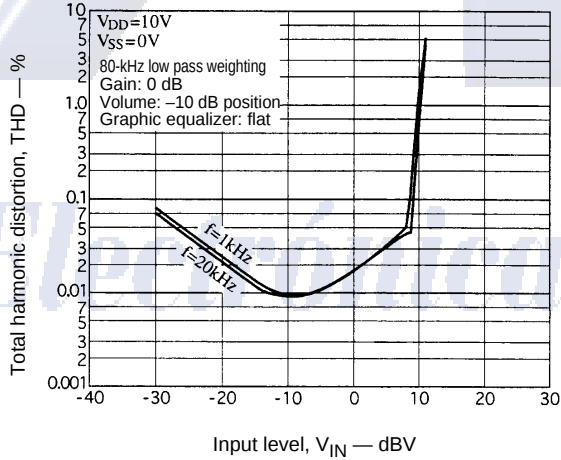


THD – Input Level Characteristics (3)

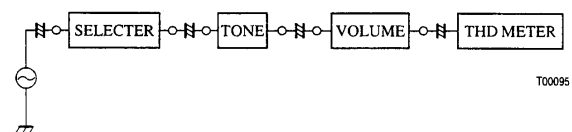
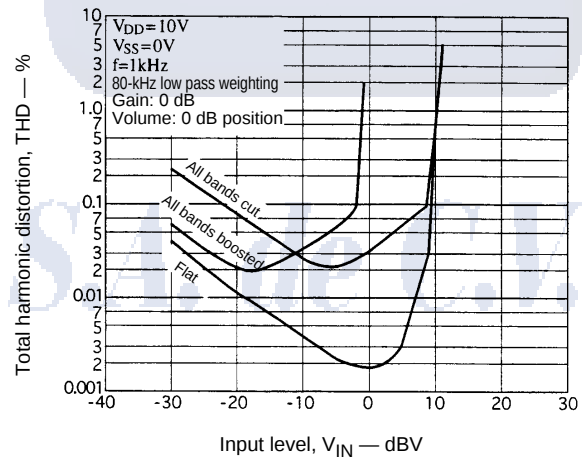


LC75396NE



THD – Output Level Characteristics (1)

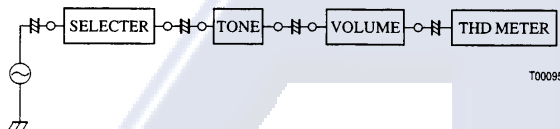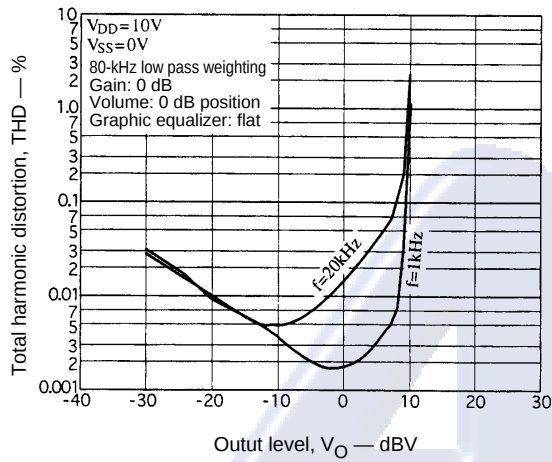

THD – Output Level Characteristics (2)

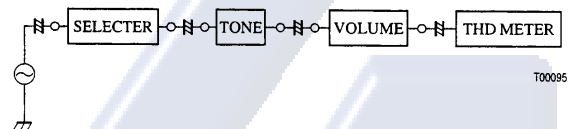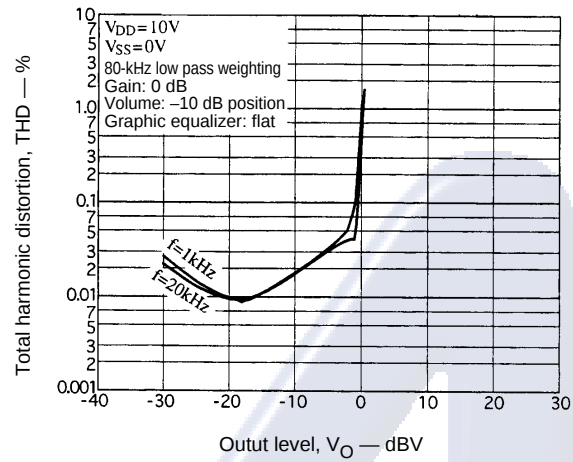

THD – Output Level Characteristics (3)

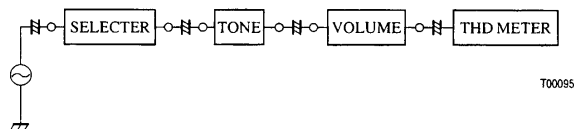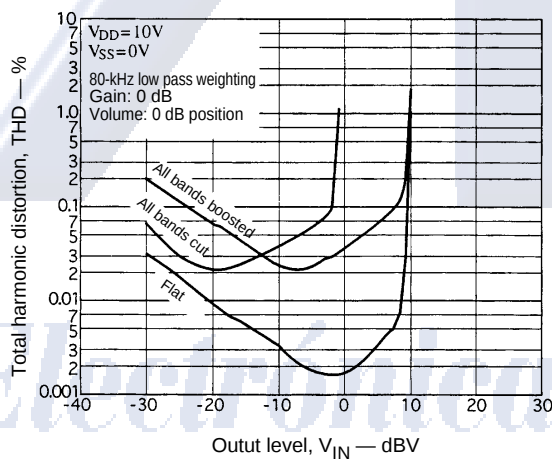

Usage Notes

- When the power is first applied, the internal analog switches are in indeterminate states. The chip therefore requires muting or other external measures until it has received the proper data.
- After power is first applied, applications must initialize this chip by sending the initial data (1) and (2) described below.
 - Initial data ... (1) Address 01000001
Data: (Set the volume to ∞ , set both D34 and D35 to 0, and set all other data to 0)
 - (2) Address 01000001
Data: (Set the volume to ∞ , set both D34 and D35 to 1, and set all other data to 0)

After transferring that data, set the left and right channel initial settings before turning off the mute function.

- Provide grounding patterns or shielding for the lines to the CL, DI, and CE pins so as to prevent their high-frequency digital signals from interfering with the operation of nearby analog circuits.

LC75396NE



Electrónica S.A. de C.V.

- No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.
- Anyone purchasing any products described or contained herein for an above-mentioned use shall:
 - ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use:
 - ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of May, 1998. Specifications and information herein are subject to change without notice.