

**PRELIMINARY**

some parametric limits are subject to change.

**M62493FP**


DIGITAL SOUND CONTROLLER

**SINGLE CHIP ANALOG SOUND PROCESSOR****DESCRIPTION**

Home Audio, Equipment, Radio-Cassette, Recorder, TV.

**FEATURES**

- 6-input selector
- Input ATT (-5dB) [ ON / OFF ]
- 5 band graphic equalizer ; 1 band ( $0, \pm 3.8, \pm 7.6, \pm 13\text{dB}$ )  
4 band ( $0, \pm 3, \pm 6, \pm 10\text{dB}$ )
- Electric volume 32 steps (.dB to -76dB, -)
- Treble, Bass boost [ ON / OFF ]
- Surround (Using external delay) [ ON / OFF ]
- Vocal cancel [ ON / OFF ]
- Multilingual record switching [ ON / OFF ]
- SW mode for control of DPL fields 2-lines for Rec output,  
1-line for mute output.
- Input / output of adapter supporting karaoke control.
- Ability fair a single power,  $\pm$ power. (The outside COM power is necessary when uses single power.)
- Supper woofer output
- Output of spectrum analyzer (L+R)




Outline 80P6N

Pitch ; 0.8 mm

Size ; 20.0 mmX14.0mmX  
2.8mm


**RECOMMENDED OPERATING CONDITION**

Power voltage range •••  $\pm 4.5\text{V}$  to  $\pm 7.5\text{V}$  [9V to 15V (When uses single power) ]

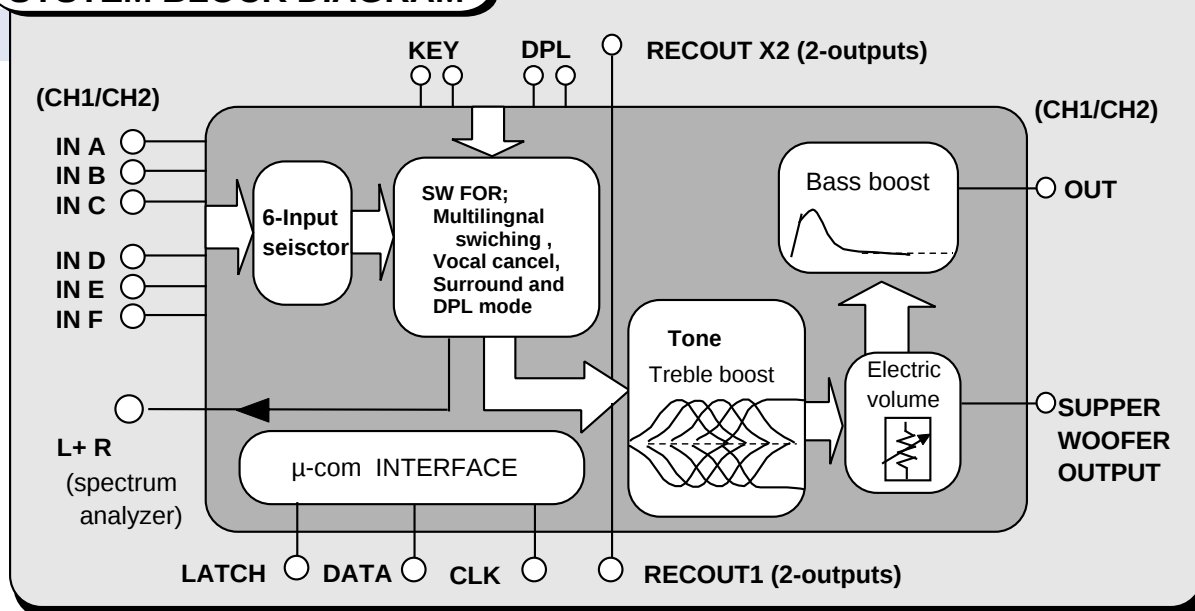**SYSTEM BLOCK DIAGRAM**

**PRELIMINARY**

some parametric limits are subject to change.

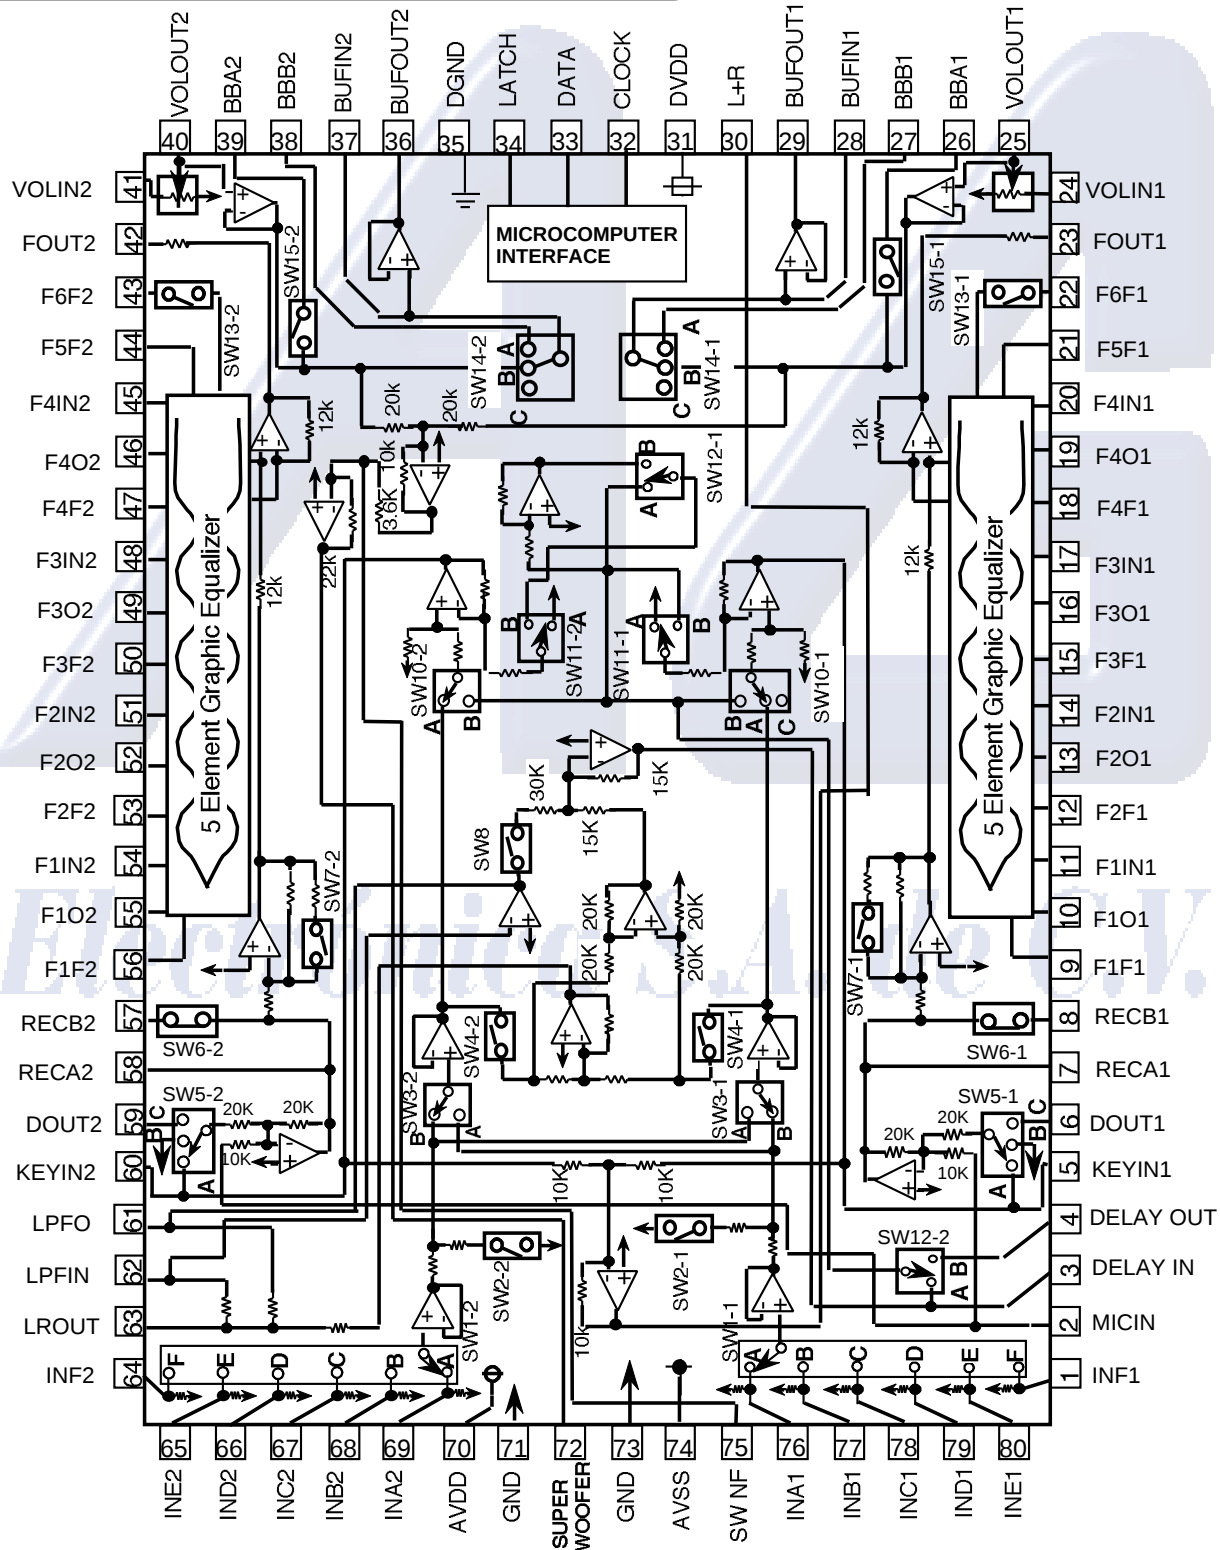**M62493FP****DIGITAL SOUND CONTROLLER****PIN CONFIGURATION AND IC INTERNAL BLOCK DIAGRAM**

**PRELIMINARY**  
some parametric limits are subject to change.


# M62493FP

DIGITAL SOUND CONTROLLER

## ABSOLUTE MAXIMUM RATINGS

| System    | Parameter              | Condition                                        | Ratings     | Unit                    |
|-----------|------------------------|--------------------------------------------------|-------------|-------------------------|
| AVDD,AVSS | Analog supply voltage  |                                                  | $\pm 7.8$   | V                       |
| DVDD      | Digital supply voltage |                                                  | 6.0         | V                       |
| Pd        | Power dissipation      | $T_a \leq 25^{\circ}\text{C}$                    | 1250        | mW                      |
| K         | Thermal derating       | $T_a > 25^{\circ}\text{C}$<br>Attached PC Board* | 12.5        | mW / $^{\circ}\text{C}$ |
| Topr      | Operating temperature  |                                                  | -20 to +55  | $^{\circ}\text{C}$      |
| Tstg      | Storage temperature    |                                                  | -40 to +125 | $^{\circ}\text{C}$      |

## TYPICAL CHARACTERISTICS THERMAL DERATING

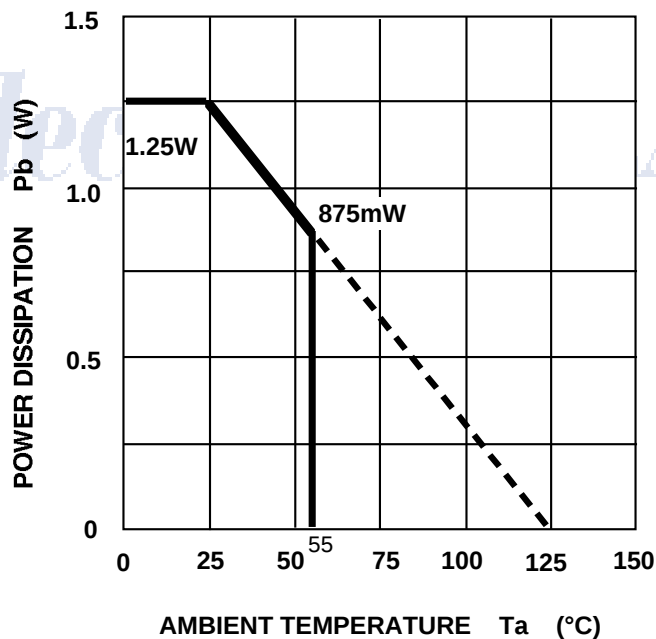

\*Note ; PC Board

PC Board Size  
140mm X140mm  
PC Board Thickness  
1.6mm  
PC Board Material  
Epoxy  
Copper Film Thickness  
18 $\mu\text{m}$   
Copper Foil Size  
0.25mm X50mm

**PRELIMINARY**  
some parametric limits are subject to change.

# M62493FP

DIGITAL SOUND CONTROLLER

## RECOMMENDED OPERATION CONDITION


( Ta = 25°C, unless otherwise noted )

| Parameter                                        | Symbol | Condition        | Limits   |      |          | Unit |
|--------------------------------------------------|--------|------------------|----------|------|----------|------|
|                                                  |        |                  | MIN      | TYP  | MAX      |      |
| Circuit current of analog positive power voltage | AVDD   | Note.1           | 4.5      | 7.0  | 7.5      | V    |
| Circuit current of analog negative power voltage | AVSS   | Note.1           | -7.5     | -7.0 | -4.5     | V    |
| Circuit current of digital power voltage         | DVDD   | DVDD $\neq$ AVDD | 4.5      | 5.0  | 5.5      | V    |
| High-level Input voltage                         | VIH    |                  | DVDD-0.7 | —    | VDD      | V    |
| Low-level Input voltage                          | VIL    |                  | 0        | —    | DGND+0.7 | V    |

Note 1 ; The sequence of the power supply is as follows.

AVDD → AVSS → DVDD

## RELATIONSHIPS BETWEEN DATA AND CLOCK

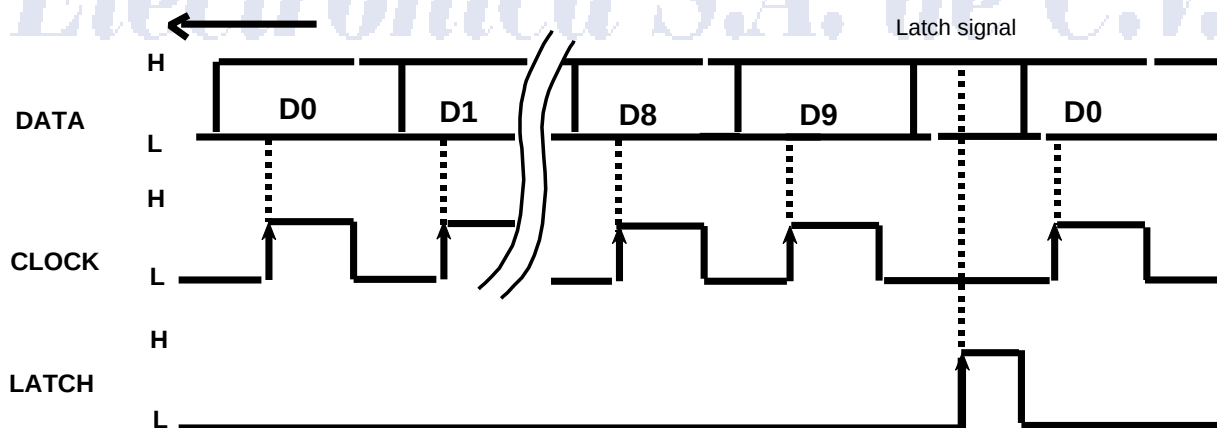

DATA reading mode ;  
The rising edge of the CLOCK signal.


LATCH reading mode ;  
The rising edge of the LATCH signal.

**PRELIMINARY**  
some parametric limits are subject to change.

# M62493FP

DIGITAL SOUND CONTROLLER

## CLOCK AND DATA TIMING

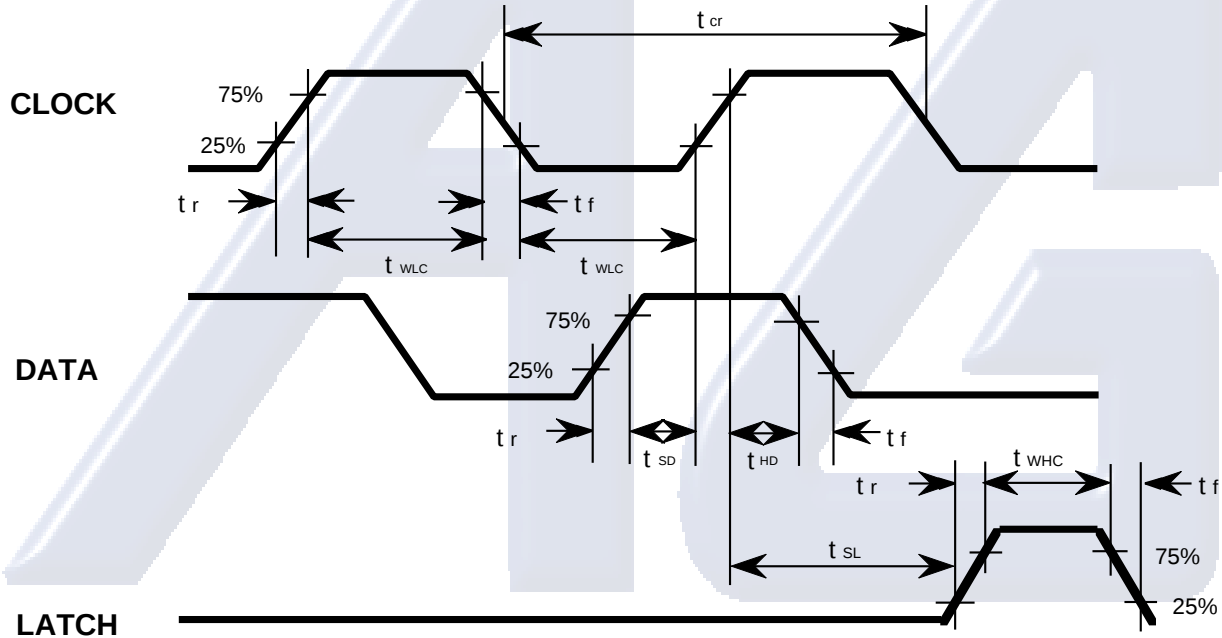

## DIGITAL BLOCK TIMING REGULATION

| Symbol    | Parameter                       | Limirs |     |     | Unit |
|-----------|---------------------------------|--------|-----|-----|------|
|           |                                 | Min    | typ | Max |      |
| $t_{cr}$  | CLOCK cycle time                | 4      | —   | —   | μsec |
| $t_{whc}$ | CLOCK pulse width ( "H" level ) | 1.6    | —   | —   |      |
| $t_{wlc}$ | CLOCK pulse width ( "L" level ) | 1.6    | —   | —   |      |
| $t_r$     | CLOCK, DATA, LATCH rise time    | —      | —   | 0.4 |      |
| $t_f$     | CLOCK, DATA, LATCH fall time    | —      | —   | 0.4 |      |
| $t_{sd}$  | DATA setup time                 | 0.8    | —   | —   |      |
| $t_{hd}$  | DATA hold time                  | 0.8    | —   | —   |      |
| $t_{sl}$  | LATCH setup time                | 1      | —   | —   |      |
| $t_{whl}$ | LATCH pulse width               | 1.6    | —   | —   |      |

**PRELIMINARY**  
some parametric limits are subject to change.

# M62493FP

DIGITAL SOUND CONTROLLER

## DATA INPUT FORMAT

5 kinds of input format option are available by changing slot setting of D5,D6,andD7.  
( When tha IC is powered up, the internal setting are not fixed.)



Input direction

SLOTS OF INPUT  
FORMAT SELECTION

FIXATION BIT  
OF ADDRESS

|       |                                                 |                                                          |                                                       |                                                               |                                                       |                                  |      |      |      |      |
|-------|-------------------------------------------------|----------------------------------------------------------|-------------------------------------------------------|---------------------------------------------------------------|-------------------------------------------------------|----------------------------------|------|------|------|------|
| (1)   | DO1                                             | D11                                                      | D21                                                   | D31                                                           | D41                                                   | D51                              | D6   | D7   | D8   | D9   |
|       | Input<br>ATT<br>1 : -5dB<br>0 : 0dB             | Tone<br>ATT<br>1 : -6dB<br>0 : 0dB                       | For the multiplex<br>software<br>cf. (8) Setting code |                                                               | For the function<br>software<br>cf. (11) Setting code |                                  | 0    | 0    | 1    | 1    |
| (2)   | DO2                                             | D12                                                      | D22                                                   | D32                                                           | D42                                                   | D52                              | D6   | D7   | D8   | D9   |
|       | For Input Selector<br>cf. (10) Setting code     |                                                          |                                                       | LOW BOOST<br>1: ON<br>sw15-1,2 : ON<br>sw14-1,2 : A<br>0: OFF | HI BOOST<br>1: ON<br>sw13-1,2 : ON<br>0: OFF          | SW12-2<br>1: B-SIDE<br>0: A-SIDE | 0    | 1    | 1    | 1    |
| (3)   | DO3                                             | D13                                                      | D23                                                   | D33                                                           | D43                                                   | D53                              | D6   | D7   | D8   | D9   |
|       | For Tone Control<br>cf. (5) Setting code        |                                                          |                                                       | For Tone Boost / cut<br>cf. (6) Setting code                  |                                                       |                                  | 1    | 0    | 1    | 1    |
| (4-1) | DO4-1                                           | D14-1                                                    | D24-1                                                 | D34-1                                                         | D44-1                                                 | D54-1                            | D6-1 | D7-1 | D8-1 | D9-1 |
|       | For Master Volume<br>cf. (7) Setting code       |                                                          |                                                       |                                                               |                                                       | 0                                | 1    | 1    | 1    | 1    |
| (4-2) | DO4-2                                           | D14-2                                                    | D24-2                                                 | D34-2                                                         | D44-2                                                 | D54-2                            | D6-2 | D7-2 | D8-2 | D9-2 |
|       | For REC<br>Input Signal<br>cf. (9) Setting code | REC OUTPUT<br>MUTE<br>1 : ON<br>sw6-1,2 : OFF<br>0 : OFF | 0                                                     | 0                                                             | 1                                                     | 1                                | 1    | 1    | 1    | 1    |

### (5) Setting code

( Tone control )

|             | D03 | D13 | D23 |
|-------------|-----|-----|-----|
| Tone 1 (F1) | 0   | 0   | 1   |
| Tone 2 (F2) | 0   | 1   | 0   |
| Tone 3 (F3) | 0   | 1   | 1   |
| Tone 4 (F4) | 1   | 0   | 0   |
| Tone 5 (F5) | 1   | 0   | 1   |

### (6) Setting code

( Tone boost / cut and bass boost )

|       | F1      | F2 to F5 | D33 | D43 | D53 |
|-------|---------|----------|-----|-----|-----|
| BOOST | +0 dB   | +0 dB    | 0   | 0   | 0   |
|       | +3.8 dB | +3 dB    | 0   | 0   | 1   |
|       | +7.6 dB | +6 dB    | 0   | 1   | 0   |
|       | +13 dB  | +10 dB   | 0   | 1   | 1   |
| CUT   | -0 dB   | -0 dB    | 1   | 0   | 0   |
|       | -3.8 dB | -3 dB    | 1   | 0   | 1   |
|       | -7.6 dB | -6 dB    | 1   | 1   | 0   |
|       | -13 dB  | -10 dB   | 1   | 1   | 1   |

Note; Do not input other data than the above.



**PRELIMINARY**  
some parametric limits are subject to change.

# M62493FP

DIGITAL SOUND CONTROLLER

## (7) SETTING CODE ( MASTER VOLUME )

| ATT      | D04 | D14 | D24 | D34 | D44 |
|----------|-----|-----|-----|-----|-----|
| - 0.0dB  | 0   | 0   | 0   | 0   | 0   |
| - 2.0dB  | 1   | 0   | 0   | 0   | 0   |
| - 4.0dB  | 0   | 1   | 0   | 0   | 0   |
| - 6.0dB  | 1   | 1   | 0   | 0   | 0   |
| - 8.0dB  | 0   | 0   | 1   | 0   | 0   |
| - 10.0dB | 1   | 0   | 1   | 0   | 0   |
| - 12.0dB | 0   | 1   | 1   | 0   | 0   |
| - 14.0dB | 1   | 1   | 1   | 0   | 0   |
| - 16.0dB | 0   | 0   | 0   | 1   | 0   |
| - 18.0dB | 1   | 0   | 0   | 1   | 0   |
| - 20.0dB | 0   | 1   | 0   | 1   | 0   |
| - 22.0dB | 1   | 1   | 0   | 1   | 0   |
| - 24.0dB | 0   | 0   | 1   | 1   | 0   |
| - 26.0dB | 1   | 0   | 1   | 1   | 0   |
| - 28.0dB | 0   | 1   | 1   | 1   | 0   |
| - 30.0dB | 1   | 1   | 1   | 1   | 0   |
| - 32.0dB | 0   | 0   | 0   | 0   | 1   |
| - 34.0dB | 1   | 0   | 0   | 0   | 1   |
| - 36.0dB | 0   | 1   | 0   | 0   | 1   |
| - 38.0dB | 1   | 1   | 0   | 0   | 1   |
| - 40.0dB | 0   | 0   | 1   | 0   | 1   |
| - 42.0dB | 1   | 0   | 1   | 0   | 1   |
| - 44.0dB | 0   | 1   | 1   | 0   | 1   |
| - 48.0dB | 1   | 1   | 1   | 0   | 1   |
| - 52.0dB | 0   | 0   | 0   | 1   | 1   |
| - 56.0dB | 1   | 0   | 0   | 1   | 1   |
| - 60.0dB | 0   | 1   | 0   | 1   | 1   |
| - 64.0dB | 1   | 1   | 0   | 1   | 1   |
| - 68.0dB | 0   | 0   | 1   | 1   | 1   |
| - 72.0dB | 1   | 0   | 1   | 1   | 1   |
| - 76.0dB | 0   | 1   | 1   | 1   | 1   |
| - •      | 1   | 1   | 1   | 1   | 1   |

## (8) MULTILINGUAL RECORD CODE

|                       | D21 | D31 | SW3-1 | SW3-2 |
|-----------------------|-----|-----|-------|-------|
| NORMAL                | 0   | 0   | B     | B     |
| CH1 only              | 0   | 1   | B     | A     |
| CH2 only              | 1   | 0   | A     | B     |
| CH1 / CH2<br>Exchange | 1   | 1   | A     | A     |

## (9) REC INPUT SIGNAL

### CHANGE SETTING CODE

| INPUT<br>SIGNAL | D04-2 | D14-2 | SW5-1<br>SW5-2 |
|-----------------|-------|-------|----------------|
| THROUGH         | 0     | 0     | A              |
| DPL             | 1     | 0     | C              |
| GND             | 0     | 1     | B              |

## (10) INPUT SELECTOR CODE

| SELECTOR | D02 | D12 | D22 |
|----------|-----|-----|-----|
| A        | 0   | 0   | 0   |
| B        | 0   | 0   | 1   |
| C        | 0   | 1   | 0   |
| D        | 0   | 1   | 1   |
| E        | 1   | 0   | 0   |
| F        | 1   | 0   | 1   |

## (11) FUNCTION CODE

| INPUT SIGNAL          | D41 | D51 | sw4-1<br>sw4-2 | sw8 | sw10-1 | sw10-2 | sw11-1<br>sw11-2 | sw12-1 |
|-----------------------|-----|-----|----------------|-----|--------|--------|------------------|--------|
| NORMAL                | 0   | 0   | OFF            | OFF | A      | A      | A                | A      |
| VOCAL<br>CANCELLATION | 0   | 1   | ON             | ON  | B      | B      | A                | A      |
| SURROUND              | 1   | 0   | ON             | OFF | A      | A      | B                | B      |

Note ; Do not input other data than the above.

**PRELIMINARY**  
some parametric limits are subject to change.

# M62493FP

DIGITAL SOUND CONTROLLER

## ELECTRICAL CHARACTERISTICS

( Ta=25°C, AVdd=7V,AVss= -7V,DVdd=5V,f=1kHz,unless otherwise noted.

Tone control and boost are set to 0dB )

### (1) POWER SUPPLY CHARACTERISTICS

| Parameter                 | Symbol | Test conditions                                              | Limits |     |     | Unit |
|---------------------------|--------|--------------------------------------------------------------|--------|-----|-----|------|
|                           |        |                                                              | Min    | typ | Max |      |
| Circuit current (Analog+) | AId    | Current at pin 70 with<br>AVdd=7.0V,AVss= -7.0V<br>No signal | —      | 50  | 58  | mA   |
| Circuit current (Analog-) | AIss   | Current at pin 74 with<br>AVdd=7.0V,AVss= -7.0V<br>No signal | -58    | -50 | —   | mA   |
| Circuit current (Digital) | DId    | Current at pin 31 with<br>DVdd=5.0V<br>No signal             | —      | 0.3 | 1.2 | mA   |

### (2) INPUT / OUTPUT CHARACTERISTICS

| Parameter                  | Symbol  | Test conditions                                                       |             | Limits |      |      | Unit  |
|----------------------------|---------|-----------------------------------------------------------------------|-------------|--------|------|------|-------|
|                            |         |                                                                       |             | Min    | typ  | Max  |       |
| Input resistance           | Rin     | 76pin,69Pin                                                           |             | 30     | 60   | 120  | KW    |
| Max. input voltage         | VIM     | Input pin (76,64), Output pin (29,36)<br>RL =10KW, THD=1%             |             | 3.0    | 4.0  | —    | Vrms  |
| Output pin voltage         | Vodc    | 29pin,36pin, No signal                                                |             | -0.4   | 0.0  | 0.4  | V     |
|                            | Vrecdc  | 7pin,58pin, No signal                                                 |             | -0.4   | 0.0  | 0.4  | V     |
| Pass gain                  | Gv      | Vin=1Vrms,FLAT,(76,69pin)-(29,36pin)gains.                            |             | -2.0   | 0    | 2.0  | dB    |
| Max. attenuation           | ATT     | Vo=1Vrms,29,36pin<br>JIS-A filter                                     |             | —      | -85  | -77  | dB    |
| Output noise voltage       | Vono    | JIS-A filter                                                          | (29,36 )pin | —      | 10.0 | 24   | μVrms |
|                            | Vrecno  | No signal,Rg=10KW<br>FLAT condition                                   | (7,58 )pin  | —      | 10.0 | 20   | μVrms |
| Distortion factor          | THD     | 29pin,36pin, BW=400 to 30kHz<br>Vo=0.5Vrms, RL=10kW                   |             | —      | 0.01 | 0.05 | %     |
|                            | THDrecA | 7pin,58pin, BW=400 to 30kHz<br>Vo=0.5Vrms, RL=30kW                    |             | —      | 0.01 | 0.05 | %     |
|                            | THDrecB | 8pin,57pin, BW=400 to 30kHz<br>Vo=0.5Vrms, RL=51kW                    |             | —      | 0.01 | 0.05 | %     |
| Crosstalk between channels | CT      | Vo=0.5Vrms , RL=10KW,JIS-A<br>29pin - 36pin gains Rg=10KW<br>2pin GND |             | —      | -70  | -55  | dB    |
|                            | CTrec   | Vo=0.5Vrms , RL=30KW,JIS-A<br>7pin - 58pin gains Rg=10KW<br>2pin GND  |             | —      | -70  | -55  | dB    |

**PRELIMINARY**  
some parametric limits are subject to change.

# M62493FP

DIGITAL SOUND CONTROLLER

## (3) TONE CONTROL CHARACTERISTICS

| Parameter                       | Symbol  |         | Test condition                               | Limits |      |       | Unit |
|---------------------------------|---------|---------|----------------------------------------------|--------|------|-------|------|
|                                 |         |         |                                              | Min    | typ  | Max   |      |
| Voltage Gain<br>(Tone control ) | Gboost1 | F1      | 3.8dB                                        | 2.3    | 3.8  | 5.3   | dB   |
|                                 |         | F2 to 5 | 3 dB                                         | 1.5    | 3    | 4.5   |      |
|                                 | Gboost2 | F1      | 7.6dB                                        | 6.1    | 7.6  | 9.1   | dB   |
|                                 |         | F2 to 5 | 6 dB                                         | 4.5    | 6    | 7.5   |      |
|                                 | Gboost3 | F1      | 13 dB                                        | 11.0   | 13   | 15.0  | dB   |
|                                 |         | F2 to 5 | 10 dB                                        | 8.0    | 10   | 12.0  |      |
|                                 | Gcut1   | F1      | -3.8dB                                       | -5.3   | -3.8 | -2.3  | dB   |
|                                 |         | F2 to 5 | -3 dB                                        | -4.5   | -3   | -1.5  |      |
|                                 | Gcut2   | F1      | -7.6dB                                       | -9.1   | -7.6 | -6.1  | dB   |
|                                 |         | F2 to 5 | -6 dB                                        | -7.5   | -6   | -4.5  |      |
|                                 | Gcut3   | F1      | -13dB                                        | -15.0  | -13  | -11.0 | dB   |
|                                 |         | F2 to 5 | -10 dB                                       | -12.0  | -10  | -8.0  |      |
| Voltage Gain<br>(HI Boost)      | Hboost  |         | Input pin (6,59) - Output pin (23,42) gains. | 6.5    | 8    | 9.5   | dB   |
| Balance between channels        | BALton  |         | Each of boost,+10,-10dB conditions.          | -1.5   | 0    | +1.5  | dB   |

## (4) CH1 / CH2 MIX SIGNAL


| Parameter            |                      | Symbol | Test conditions                                   | Limits |      |      | Unit  |
|----------------------|----------------------|--------|---------------------------------------------------|--------|------|------|-------|
|                      |                      |        |                                                   | Min    | typ  | Max  |       |
| Supper woofer output | Gain                 | GvSW   | Condition same as Gv<br>RL=30kW                   | 8      | 10   | 12   | dB    |
|                      | Distortion factor    | THDSW  | BW=400 to 30kHz<br>Vo=0.5Vrms , RL=30KW           | —      | 0.03 | 0.15 | %     |
|                      | Output noise voltage | VnoSW  | Condition same as Vono<br>No signal, JIS-A filter | —      | 70   | 170  | μVrms |
| L+R Output voltage   |                      | GvLR   | Condition same as Gv<br>RL=51kW                   | -2     | 0    | 2    | dB    |

**PRELIMINARY**  
some parametric limits are subject to change.

# M62493FP

DIGITAL SOUND CONTROLLER

## MASTER VOLUME CIRCUIT

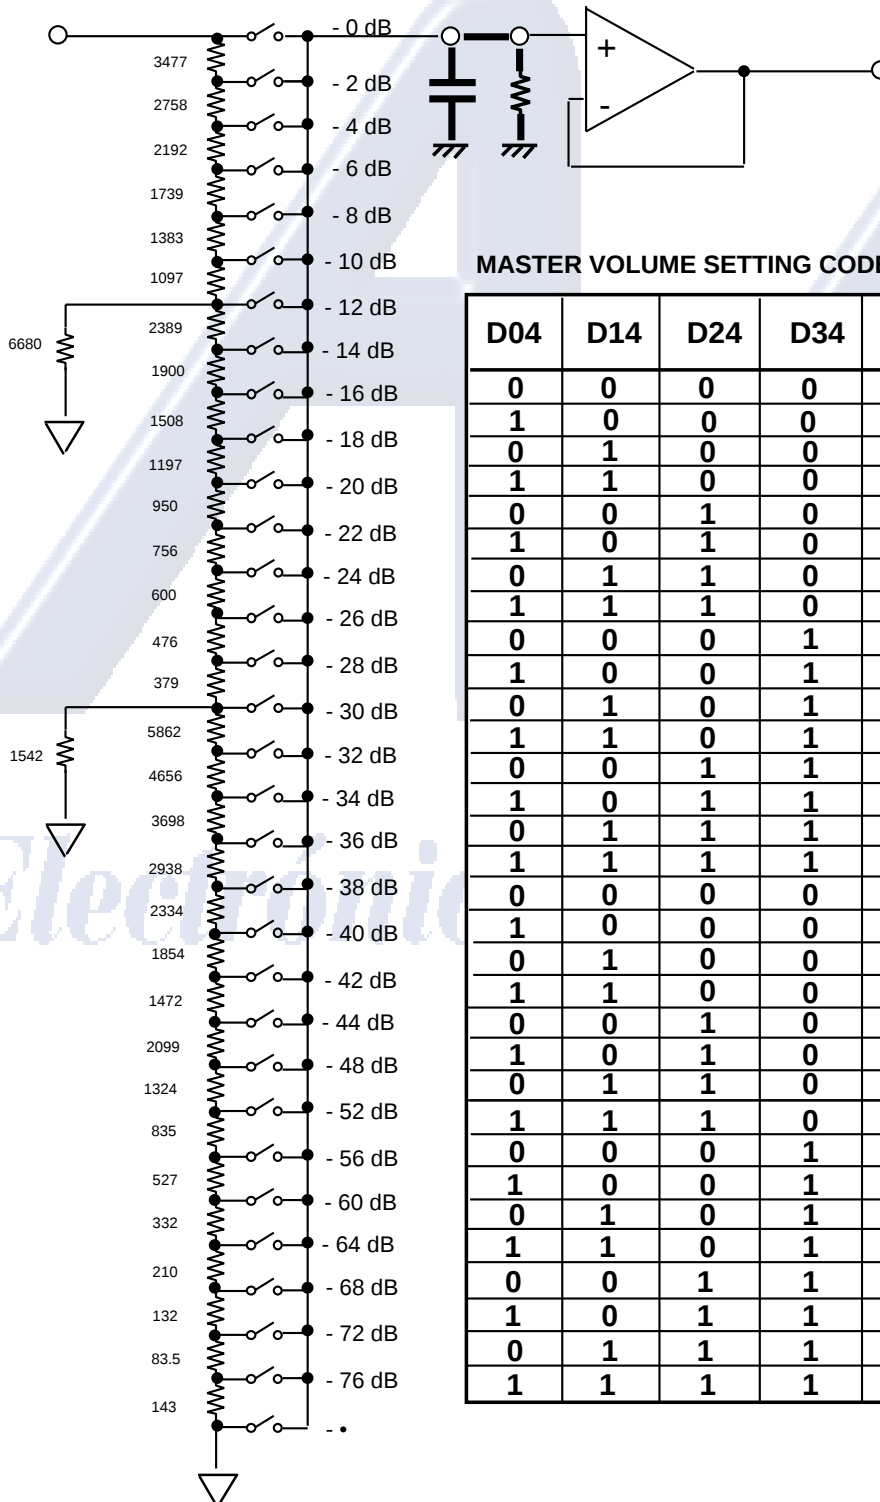

MASTER VOLUME SETTING CODE

| D04 | D14 | D24 | D34 | D44 | ATT      |
|-----|-----|-----|-----|-----|----------|
| 0   | 0   | 0   | 0   | 0   | - 0.0dB  |
| 1   | 0   | 0   | 0   | 0   | - 2.0dB  |
| 0   | 1   | 0   | 0   | 0   | - 4.0dB  |
| 1   | 1   | 0   | 0   | 0   | - 6.0dB  |
| 0   | 0   | 1   | 0   | 0   | - 8.0dB  |
| 1   | 0   | 1   | 0   | 0   | - 10.0dB |
| 0   | 1   | 1   | 0   | 0   | - 12.0dB |
| 1   | 1   | 1   | 0   | 0   | - 14.0dB |
| 0   | 0   | 0   | 1   | 0   | - 16.0dB |
| 1   | 0   | 0   | 1   | 0   | - 18.0dB |
| 0   | 1   | 0   | 1   | 0   | - 20.0dB |
| 1   | 1   | 0   | 1   | 0   | - 22.0dB |
| 0   | 0   | 1   | 1   | 0   | - 24.0dB |
| 1   | 0   | 1   | 1   | 0   | - 26.0dB |
| 0   | 1   | 1   | 1   | 0   | - 28.0dB |
| 1   | 1   | 1   | 1   | 0   | - 30.0dB |
| 0   | 0   | 0   | 0   | 1   | - 32.0dB |
| 1   | 0   | 0   | 0   | 1   | - 34.0dB |
| 0   | 1   | 0   | 0   | 1   | - 36.0dB |
| 1   | 1   | 0   | 0   | 1   | - 38.0dB |
| 0   | 0   | 1   | 0   | 1   | - 40.0dB |
| 1   | 0   | 1   | 0   | 1   | - 42.0dB |
| 0   | 1   | 1   | 0   | 1   | - 44.0dB |
| 1   | 1   | 1   | 0   | 1   | - 48.0dB |
| 0   | 0   | 0   | 1   | 1   | - 52.0dB |
| 1   | 0   | 0   | 1   | 1   | - 56.0dB |
| 0   | 1   | 0   | 1   | 1   | - 60.0dB |
| 1   | 1   | 0   | 1   | 1   | - 64.0dB |
| 0   | 0   | 1   | 1   | 1   | - 68.0dB |
| 1   | 0   | 1   | 1   | 1   | - 72.0dB |
| 0   | 1   | 1   | 1   | 1   | - 76.0dB |
| 1   | 1   | 1   | 1   | 1   | - .      |

**PRELIMINARY**  
 Notice ; This is not a final specification.  
 some parametric limits are subject to change.


MITSUBISHI SOUND PROCESSORS

# M62493FP

DIGITAL SOUND CONTROLLER

## FUNCTION DESCRIPTION

### (1) TONE CONTROLLER EQUIVALENT CIRCUIT

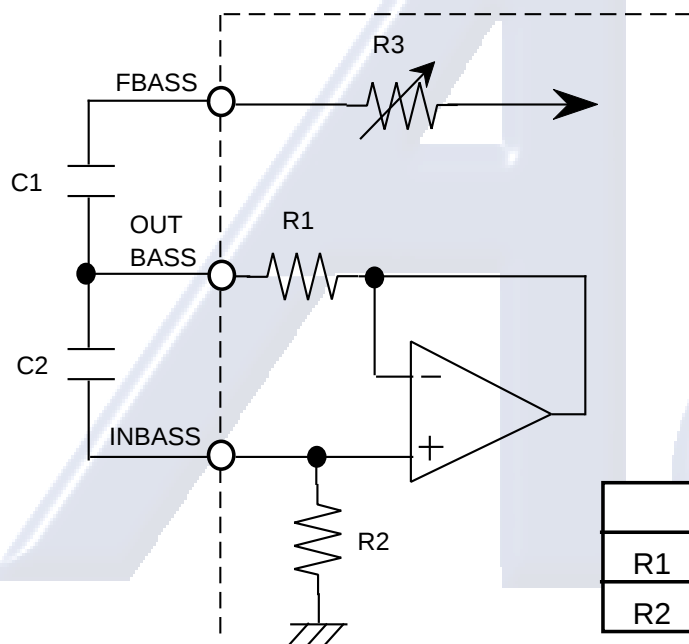

Center frequency

$$f_0 = 1 / 2 \pi \sqrt{C1 \cdot C2 \cdot R1 \cdot R2} \text{ [Hz]}$$

$$Q = \sqrt{C2 (R1 \cdot R2) / C1 (R1 + R3)^2}$$

|    | F1     | F2     | F3     | F4     | F5 |
|----|--------|--------|--------|--------|----|
| R1 | 1.49kW | 1.49kW | 1.49kW | 1.49kW | —  |
| R2 | 306kW  | 306kW  | 306kW  | 306kW  | —  |

Fig.1 ; The equivalent circuit of tone controller.

*Electrónica S.A. de C.V.*

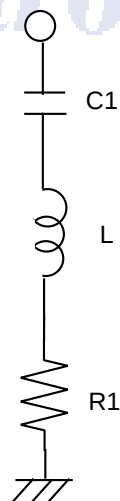


Fig.2 is equivalent to Fig.1.  
 To convert component constants,  
 the equation below is used.

$$L = C2 \cdot R1 \cdot R2$$

Fig.2 ; The equivalent circuit using L


**PRELIMINARY**

Notice ; This is not a final specification.  
some parametric limits are subject to change.

MITSUBISHI SOUND PROCESSORS

**M62493FP**

DIGITAL SOUND CONTROLLER

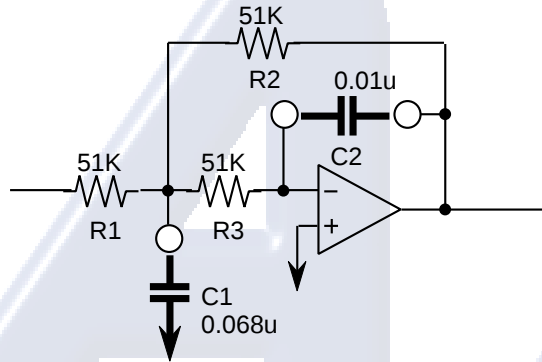**(2) VOCAL CUT L.P.F EQUIVALENT CIRCUIT**

$$T(s) = \frac{AW_0^2}{s^2 + \frac{W_0}{Q}s + W_0^2}$$

$$Q = \frac{\sqrt{R1 \cdot R2 \cdot C1 \cdot C2}}{R2 \cdot C2 + R1 \cdot C2 + \frac{R1 \cdot R2}{R3} C2}$$

$$\left\{ \begin{array}{l} A = -\frac{R1}{R2} \\ \frac{W_0}{Q} = \frac{1}{C1} \left( \frac{1}{R1} + \frac{1}{R2} + \frac{1}{R3} \right) \\ W_0 = \frac{1}{R1 \cdot R2 \cdot C1 \cdot C2} \end{array} \right.$$

At the time of ;  $R1=R2=R3$  ,  
Become ;  $A = -1$

$$f_c = \frac{1}{2\pi \sqrt{R1 \cdot R2 \cdot C1 \cdot C2}}$$

$$Q = \frac{1}{3} \sqrt{\frac{C1}{C2}} \quad (\text{Using } Q < Z)$$

At the time of ;  $R1=R2=R3=51k\Omega$ ,  
 $C1=0.068\mu F, C2=0.01\mu F$

Become ;  $f_c \div 120\text{Hz}$   
 $Q \div 0.87$

Pay attention to In-Output turning over, because using turnig over mode.



**PRELIMINARY**

Notice ; This is not a final specification.  
some parametric limits are subject to change.


MITSUBISHI SOUND PROCESSORS

**M62493FP**

DIGITAL SOUND CONTROLLER

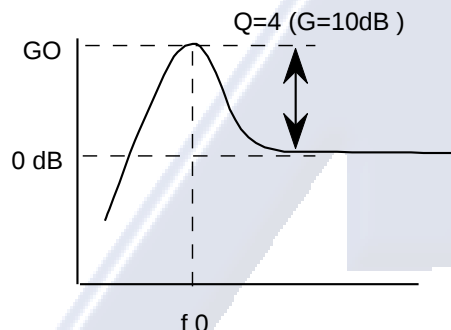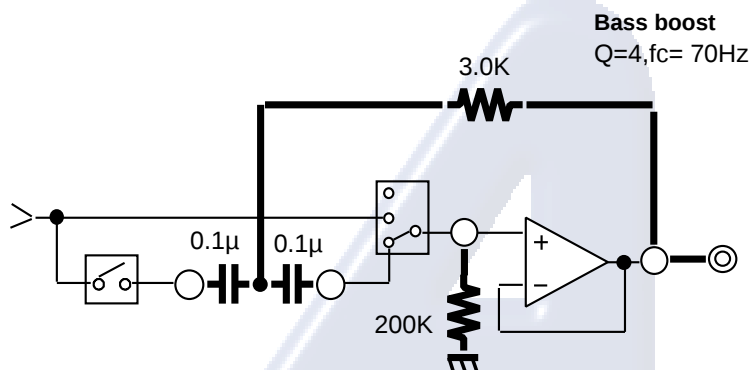**(3) BASS BOOST EQUIVALENT CIRCUIT**

Original return type 2 dimensions HPF circuit of Bass boost.

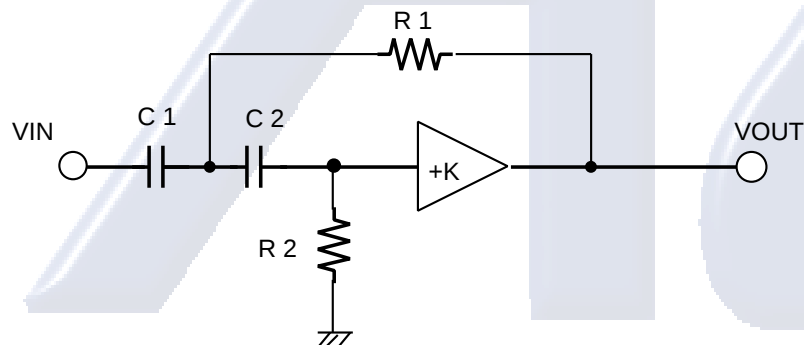

Amplitude characteristic of HPF  
(Reference)

| Q  | GO        |
|----|-----------|
| 1  | 0 to 1 dB |
| 2  | 6 dB      |
| 4  | 10 dB     |
| 5  | 13 dB     |
| 10 | 20 dB     |

Communication function is ;

$$\frac{V_{OUT}}{V_{IN}} = \frac{Ks^2}{s^2 + s \left[ \frac{1}{R_2 C_1} + \frac{1}{R_2 C_2} + (1-K) \frac{1}{R_1 C_1} \right] + \frac{1}{R_1 R_2 C_1 C_2}}$$

$$W_0^2 = \frac{1}{R_1 R_2 C_1 C_2}$$

$$Q = \frac{1}{\sqrt{\frac{R_1 C_1}{R_2 C_2}} + \sqrt{\frac{R_1 C_2}{R_2 C_1}} + (1-K) \sqrt{\frac{R_2 C_2}{R_1 C_1}}}$$

Bass boost consists of original return type 2 dimensions HPF circuit of upper figure.  
To the following showing an example of method of design calculation of Bass boost.

At the time of ;  
C 1 = C 2 = C f , K = +1

The upper expression becomes ;  
R f = 1 / ( w 0 C f ) ..... (1)

R 1 = R f / 2 Q ..... (2)

R 2 = 2 Q R f ..... (3)

When cut off frequency is 70Hz ,  
w0=2π x 70Hz, Q=4,condition.

At the time of ; C1=C2=C f=0.1μF

From ; (1),(2),(3)

Become ; R f=22.7 KW  
R 1 = 2.84KW  
R 2 = 182 KW

R1,R2 is about 3.0KW,200KW


**PRELIMINARY**  
 Notice ; This is not a final specification.  
 some parametric limits are subject to change.

MITSUBISHI SOUND PROCESSORS


**M62493FP**

DIGITAL SOUND CONTROLLER

#### (4) VOCAL CANCELLATION EQUIVALENT CIRCUIT

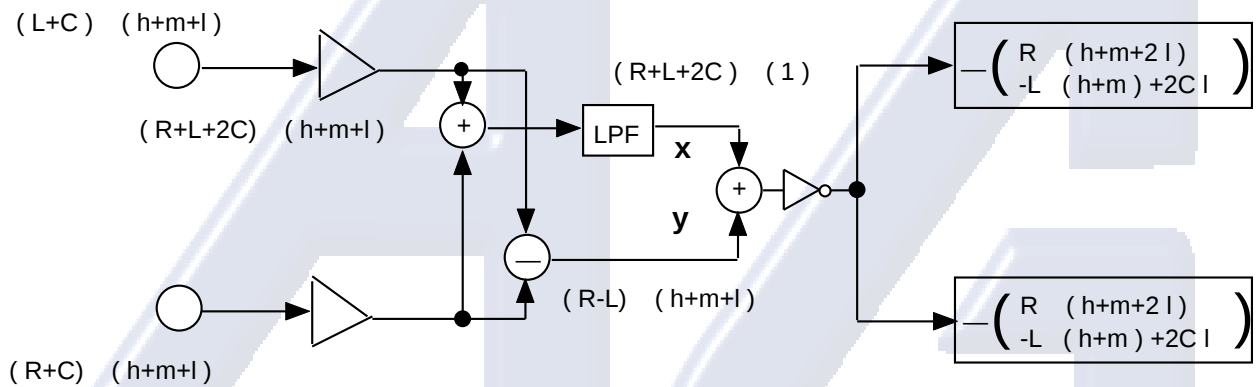

#### (5) SURROUND EQUIVALENT CIRCUIT

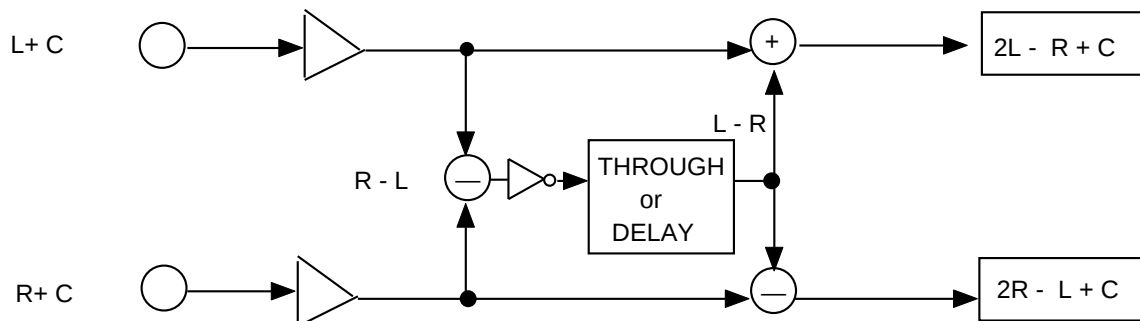



**PRELIMINARY**

Notice ; This is not a final specification.  
some parametric limits are subject to change.

MITSUBISHI SOUND PROCESSORS

**M62493FP**

DIGITAL SOUND CONTROLLER

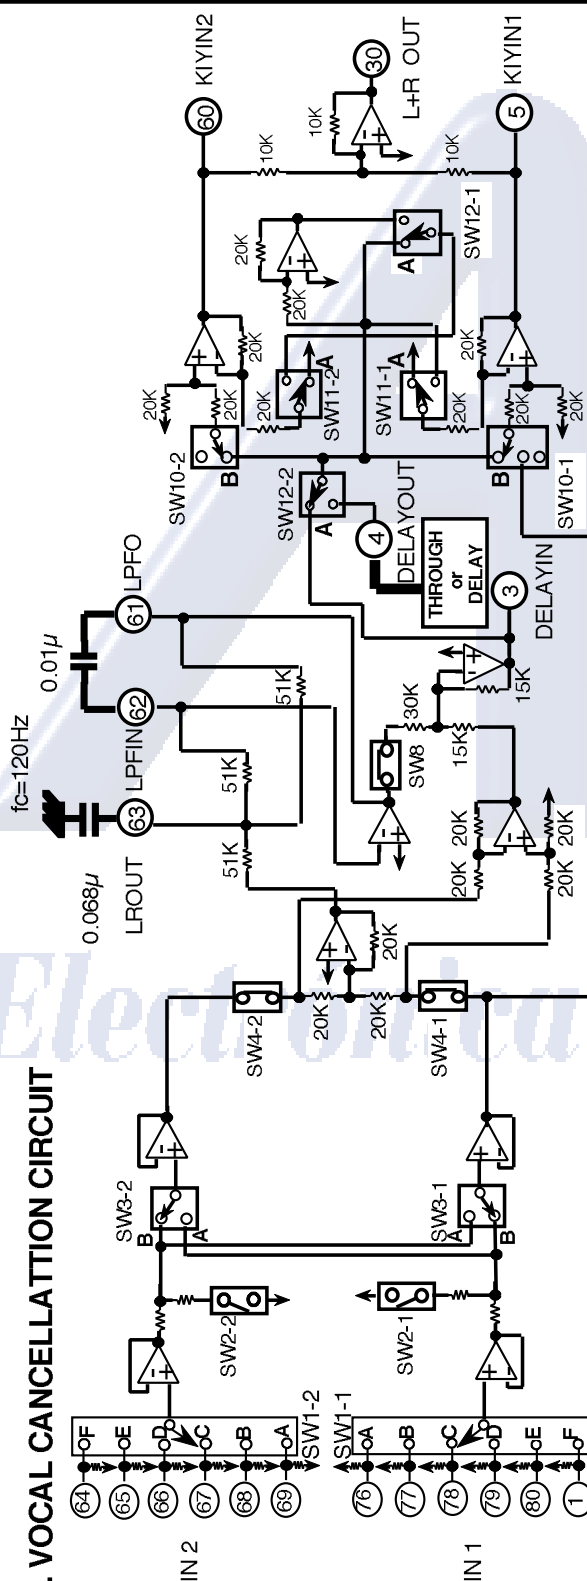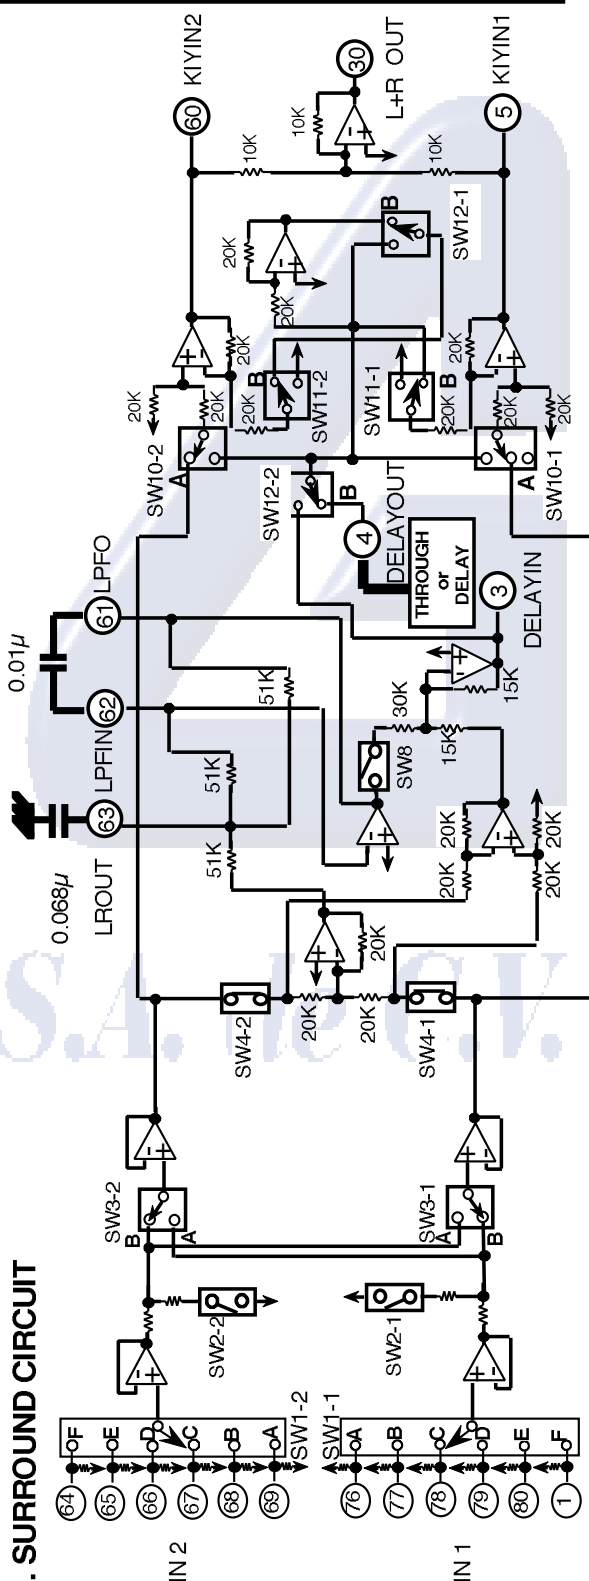**SIGNAL COMMUNICATION BLOCK CIRCUIT (NO.1)****1. VOCAL CANCELLATION CIRCUIT****2. SURROUND CIRCUIT**

**PRELIMINARY**  
This is not a final report

**PRELIMINARY**  
Notice ; This is not a final specification.  
some parametric limits are subject to change.

**mitsubishi** SOUND PROCESSORS


# M62493FP

## DIGITAL SOUND CONTROLLER

## SIGNAL COMMUNICATION BLOCK CIRCUIT (No.2)

### 3. TONE CURCUI ( CH1 )

Each of frequency +10dB to -10dB, change

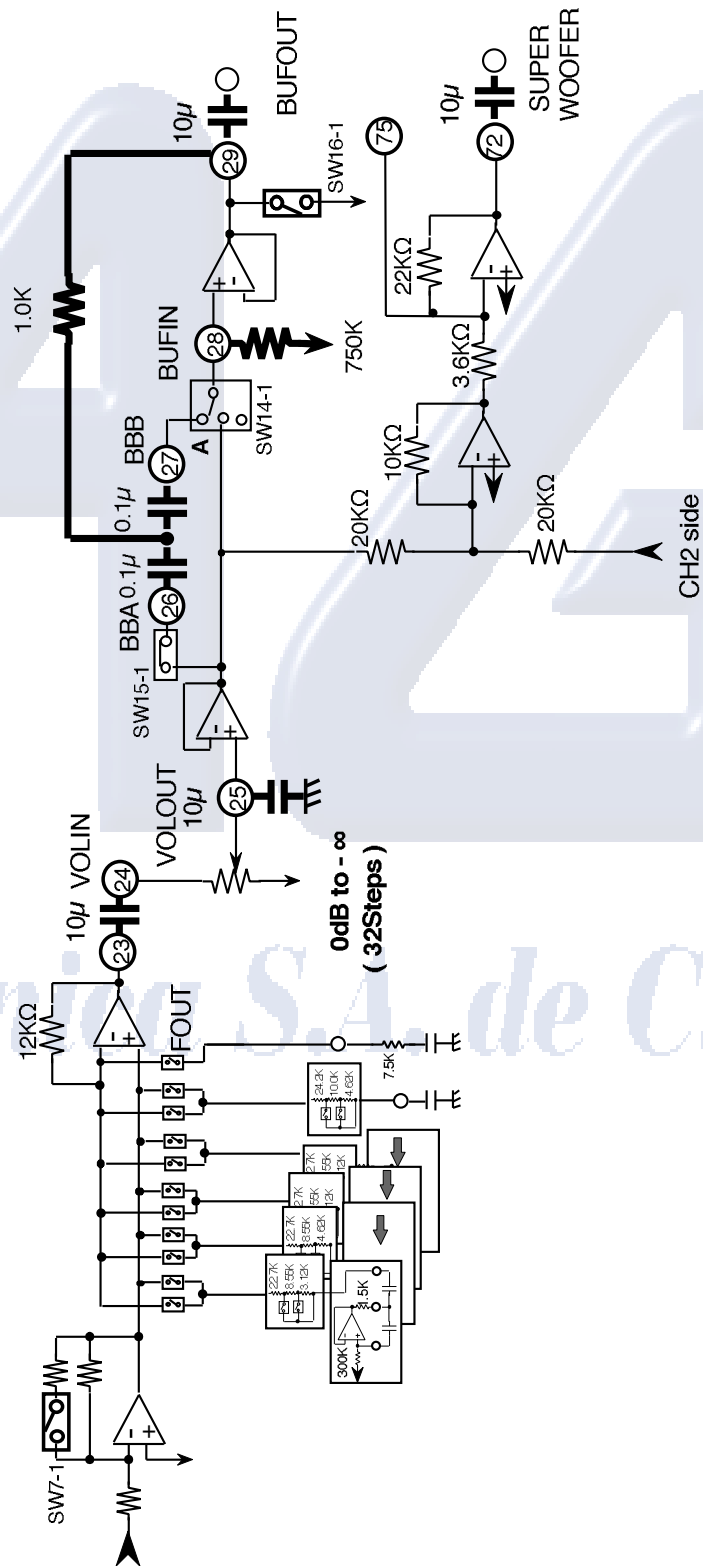



**PRELIMINARY**

Notice ; This is not a final specification.  
some parametric limits are subject to change.

MITSUBISHI SOUND PROCESSORS

**M62493FP**

DIGITAL SOUND CONTROLLER

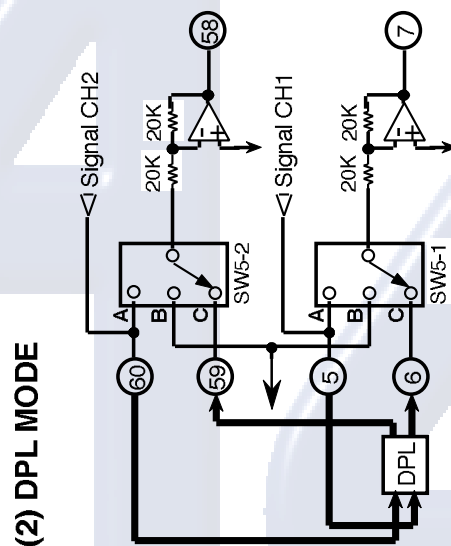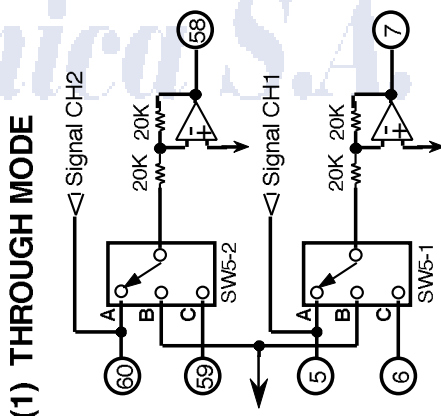**REC INPUT CHANGE CIRCUIT**

**PRELIMINARY**

Notice ; This is not a final specification.  
some parametric limits are subject to change.

MITSUBISHI SOUND PROCESSORS

**M62493FP**

DIGITAL SOUND CONTROLLER

**APPLICATION  
CIRCUIT**  
(±Power)
