



# NE5532


## Dual Operational Amplifier

### Features


- Internal frequency compensation
- Slew Rate: 8V/μs
- Input noise voltage: 8nV/√Hz (fo = 30Hz)
- Full power bandwidth: 140KHz

### Description

The NE5532 is an internally compensated dual low noise OP AMP. The high small signal and power bandwidth provides superior performance in high quality AMP, all control circuits, and telephone applications.



### Internal Block Diagram

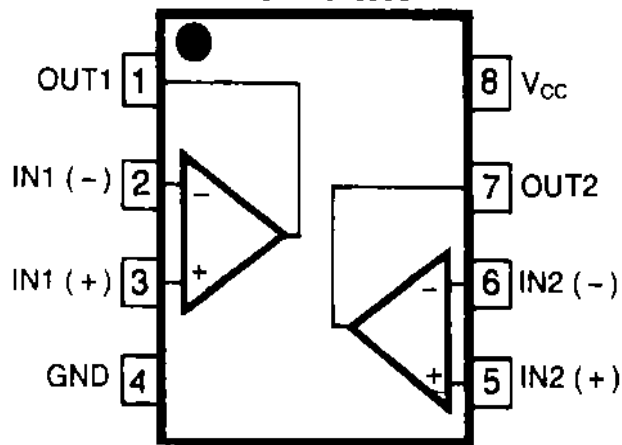

NE5532

## Absolute Maximum Ratings

Parameter	Symbol	NE5532	Unit
Power Supply Voltage	V <sub>CC</sub>	±22	V
Differential Input Voltage	V <sub>IO</sub>	±13	V
Input Voltage	V <sub>I</sub>	Supply Voltage	V
Power Dissipation	PD	1000	mW
Operating Temperature Range	TOPR	0 ~ + 70	°C

## ELECTRICAL CHARACTERISTICS

(V<sub>CC</sub>=15V, V<sub>EE</sub>= - 15V, T<sub>A</sub> = 25°C)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Input Offset Voltage	V <sub>IO</sub>	-	-	0.5	4.0	mV
Input Offset Current	I <sub>IO</sub>	-	-	10	150	nA
Input Bias Current	I <sub>BIAS</sub>	-	-	200	800	nA
Supply Current	I <sub>CC</sub>	-	-	6.0	16	mA
Input Voltage Range	V <sub>I(R)</sub>	-	±12	±13	-	V
Common Mode Rejection Range	CMRR	T <sub>A</sub> = 25 °C	70	100	-	dB
Power Supply Rejection Ratio	PSRR	T <sub>A</sub> = 25 °C	80	100	-	dB
Output Voltage Swing	V <sub>O(P-P)</sub>	R <sub>L</sub> ≥ 600Ω	±12	±13	-	V
Input Resistance	R <sub>I</sub>	T <sub>A</sub> = 25 °C	30	300	-	KΩ
Short Circuit Current	I <sub>SC</sub>	-	-	38	-	mA
Overshoot	OS	R <sub>L</sub> = 600Ω, C <sub>L</sub> = 100pF	-	10	20	%
Voltage Gain	G <sub>V</sub>	f = 10KHz	2	2.2	-	V/mV
Gain Bandwidth Product	GBW	C <sub>L</sub> = 100pF, R <sub>L</sub> = 600Ω	8	10	-	MHz
Slew Rate	SR	R <sub>L</sub> = 1K, C <sub>L</sub> = 100pF, R <sub>L</sub> = 600Ω	6	8.0	-	V/μs
Input Noise Voltage	V <sub>NI</sub>	f <sub>O</sub> = 30Hz f <sub>O</sub> = 1KHz	-	8.0 5.0	-	nV/√Hz

### Typical Performance Characteristics

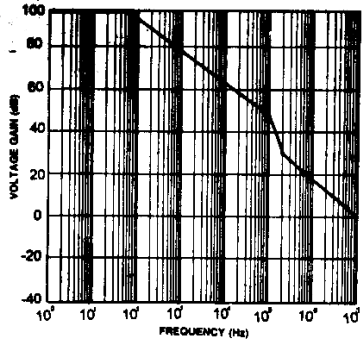


Figure 1. Open Loop Frequency Response

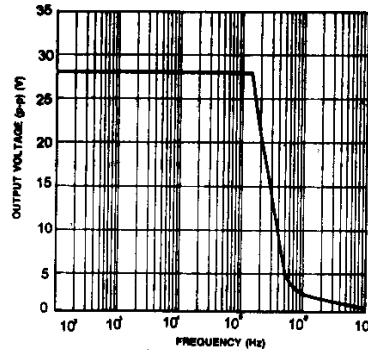


Figure 2. Large Signal Frequency Response

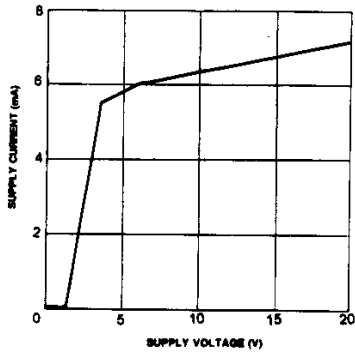


Figure 3. Supply Current vs Supply Voltage

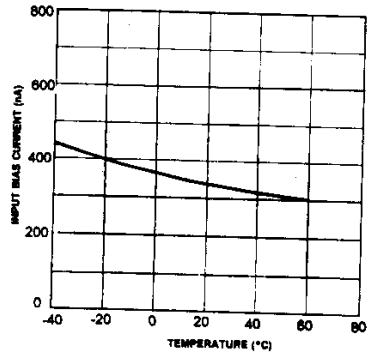


Figure 4. Input Bias Current vs Temperature

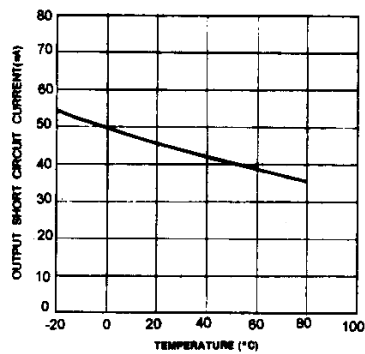


Figure 5. Output Circuit Current vs Temperature

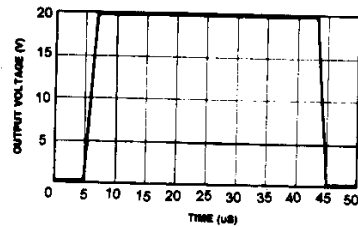





Figure 6. Slew Rate

NE5532

### Mechanical Dimensions

Package

### 8-DIP

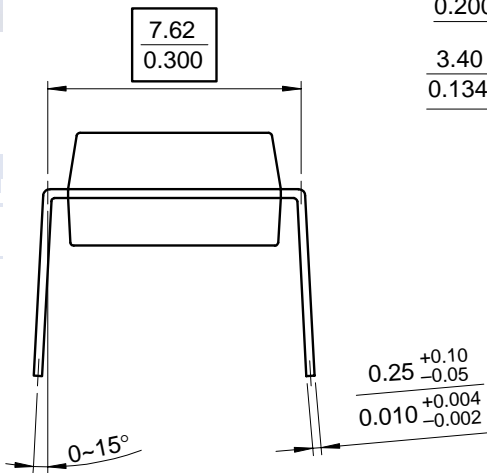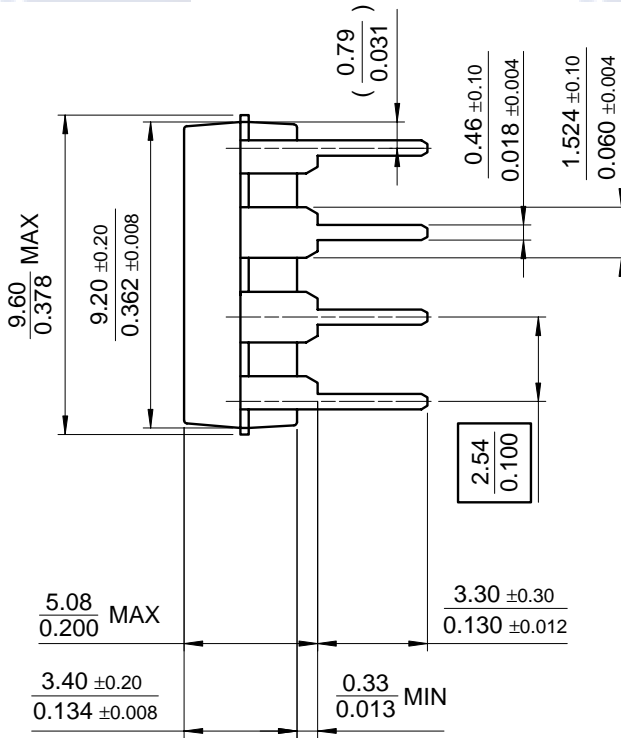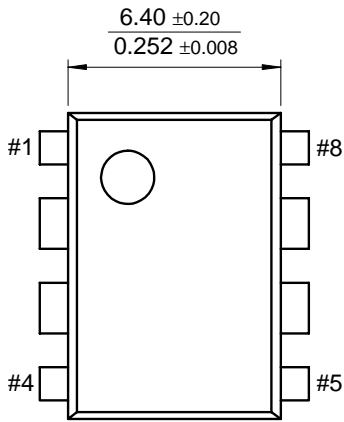

---

**Ordering Information**

Product Number	Package	Operating Temperature
NE5532N	8-DIP	0 ~ + 70°C



*Electrónica S.A. de C.V.*

NE5532

---

**LIFE SUPPORT POLICY**

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR INTERNATIONAL. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

www.fairchildsemi.com

---

7/12/00 0.0m 001  
Stock#DSxxxxxxx  
© 2000 Fairchild Semiconductor International