

# 1N5333B Series

## 5 Watt Surmetic™ 40 Zener Voltage Regulators

This is a complete series of 5 Watt Zener diodes with tight limits and better operating characteristics that reflect the superior capabilities of silicon-oxide passivated junctions. All this in an axial-lead, transfer-molded plastic package that offers protection in all common environmental conditions.

### Specification Features:

- Zener Voltage Range – 3.3 V to 200 V
- ESD Rating of Class 3 (>16 KV) per Human Body Model
- Surge Rating of up to 180 W @ 8.3 ms
- Maximum Limits Guaranteed on up to Six Electrical Parameters

### Mechanical Characteristics:

**CASE:** Void free, transfer-molded, thermosetting plastic

**FINISH:** All external surfaces are corrosion resistant and leads are readily solderable

### MAXIMUM LEAD TEMPERATURE FOR SOLDERING PURPOSES:

230°C, 1/16" from the case for 10 seconds

**POLARITY:** Cathode indicated by polarity band

**MOUNTING POSITION:** Any



### MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Max. Steady State Power Dissipation @ $T_L = 75^\circ\text{C}$ , Lead Length = 3/8" Derate above 75°C	$P_D$	5 40	W mW/°C
Operating and Storage Temperature Range	$T_J, T_{stg}$	-65 to +200	°C




ON Semiconductor™

<http://onsemi.com>

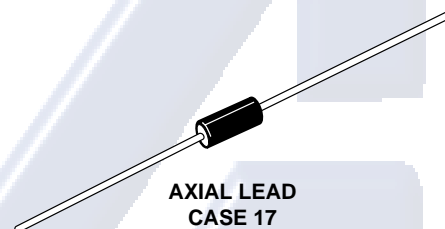

AXIAL LEAD  
CASE 17  
PLASTIC

### MARKING DIAGRAM



L = Assembly Location  
1N53xxB = Device Code  
(See Table Next Page)  
Y = Year  
WW = Work Week

### ORDERING INFORMATION


Device	Package	Shipping
1N53xxB	Axial Lead	1000 Units/Box
1N53xxBRL	Axial Lead	4000/Tape & Reel
1N53xxBTA	Axial Lead	2000/Ammo Pack

Devices listed in **bold, italic** are ON Semiconductor **Preferred** devices. **Preferred** devices are recommended choices for future use and best overall value.

**1N5333B Series**

**ELECTRICAL CHARACTERISTICS** ( $T_A = 25^\circ\text{C}$  unless otherwise noted,  $V_F = 1.2\text{ V Max @ } I_F = 1.0\text{ A}$  for all types)

Symbol	Parameter
$V_Z$	Reverse Zener Voltage @ $I_{ZT}$
$I_{ZT}$	Reverse Current
$Z_{ZT}$	Maximum Zener Impedance @ $I_{ZT}$
$I_{ZK}$	Reverse Current
$Z_{ZK}$	Maximum Zener Impedance @ $I_{ZK}$
$I_R$	Reverse Leakage Current @ $V_R$
$V_R$	Breakdown Voltage
$I_F$	Forward Current
$V_F$	Forward Voltage @ $I_F$
$I_R$	Maximum Surge Current @ $T_A = 25^\circ\text{C}$
$\Delta V_Z$	Reverse Zener Voltage Change
$I_{ZM}$	Maximum DC Zener Current

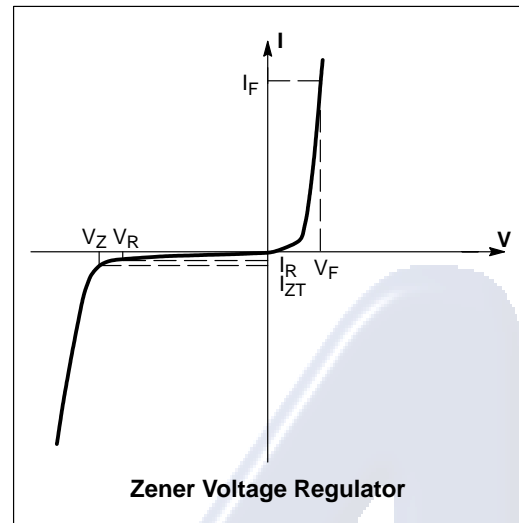

*Electrónica S.A. de C.V.*

## 1N5333B Series

ELECTRICAL CHARACTERISTICS ( $T_A = 25^\circ\text{C}$  unless otherwise noted,  $V_F = 1.2\text{ V Max}$  @  $I_F = 1.0\text{ A}$  for all types)

Device (Note 1.)	Device Marking	Zener Voltage (Note 2.)				Zener Impedance (Note 2.)			Leakage Current		I <sub>R</sub> (Note 3.)	ΔV <sub>Z</sub> (Note 4.)	I <sub>ZM</sub> (Note 5.)
		V <sub>Z</sub> (Volts)			@ I <sub>ZT</sub>	Z <sub>ZT</sub> @ I <sub>ZT</sub>	Z <sub>ZK</sub> @ I <sub>ZK</sub>	I <sub>ZK</sub>	I <sub>R</sub> @ V <sub>R</sub>				
		Min	Nom	Max	mA	Ω	Ω	μA	μA Max	Volts	A	Volts	mA
<b>1N5333B</b>	<b>1N5333B</b>	<b>3.14</b>	<b>3.3</b>	<b>3.47</b>	<b>380</b>	<b>3</b>	<b>400</b>	<b>1</b>	<b>300</b>	<b>1</b>	<b>20</b>	<b>0.85</b>	<b>1440</b>
1N5334B	1N5334B	3.42	3.6	3.78	350	2.5	500	1	150	1	18.7	0.8	1320
1N5335B	1N5335B	3.71	3.9	4.10	320	2	500	1	50	1	17.6	0.54	1220
1N5336B	1N5336B	4.09	4.3	4.52	290	2	500	1	10	1	16.4	0.49	1100
<b>1N5337B</b>	<b>1N5337B</b>	<b>4.47</b>	<b>4.7</b>	<b>4.94</b>	<b>260</b>	<b>2</b>	<b>450</b>	<b>1</b>	<b>5</b>	<b>1</b>	<b>15.3</b>	<b>0.44</b>	<b>1010</b>
<b>1N5338B</b>	<b>1N5338B</b>	<b>4.85</b>	<b>5.1</b>	<b>5.36</b>	<b>240</b>	<b>1.5</b>	<b>400</b>	<b>1</b>	<b>1</b>	<b>1</b>	<b>14.4</b>	<b>0.39</b>	<b>930</b>
<b>1N5339B</b>	<b>1N5339B</b>	<b>5.32</b>	<b>5.6</b>	<b>5.88</b>	<b>220</b>	<b>1</b>	<b>400</b>	<b>1</b>	<b>1</b>	<b>2</b>	<b>13.4</b>	<b>0.25</b>	<b>865</b>
1N5340B	1N5340B	5.70	6.0	6.30	200	1	300	1	1	3	12.7	0.19	790
<b>1N5341B</b>	<b>1N5341B</b>	<b>5.89</b>	<b>6.2</b>	<b>6.51</b>	<b>200</b>	<b>1</b>	<b>200</b>	<b>1</b>	<b>1</b>	<b>3</b>	<b>12.4</b>	<b>0.1</b>	<b>765</b>
<b>1N5342B</b>	<b>1N5342B</b>	<b>6.46</b>	<b>6.8</b>	<b>7.14</b>	<b>175</b>	<b>1</b>	<b>200</b>	<b>1</b>	<b>10</b>	<b>5.2</b>	<b>11.5</b>	<b>0.15</b>	<b>700</b>
1N5343B	1N5343B	7.13	7.5	7.88	175	1.5	200	1	10	5.7	10.7	0.15	630
1N5344B	1N5344B	7.79	8.2	8.61	150	1.5	200	1	10	6.2	10	0.2	580
1N5345B	1N5345B	8.27	8.7	9.14	150	2	200	1	10	6.6	9.5	0.2	545
1N5346B	1N5346B	8.65	9.1	9.56	150	2	150	1	7.5	6.9	9.2	0.22	520
<b>1N5347B</b>	<b>1N5347B</b>	<b>9.50</b>	<b>10</b>	<b>10.5</b>	<b>125</b>	<b>2</b>	<b>125</b>	<b>1</b>	<b>5</b>	<b>7.6</b>	<b>8.6</b>	<b>0.22</b>	<b>475</b>
1N5348B	1N5348B	10.45	11	11.55	125	2.5	125	1	5	8.4	8.0	0.25	430
<b>1N5349B</b>	<b>1N5349B</b>	<b>11.4</b>	<b>12</b>	<b>12.6</b>	<b>100</b>	<b>2.5</b>	<b>125</b>	<b>1</b>	<b>2</b>	<b>9.1</b>	<b>7.5</b>	<b>0.25</b>	<b>395</b>
<b>1N5350B</b>	<b>1N5350B</b>	<b>12.35</b>	<b>13</b>	<b>13.65</b>	<b>100</b>	<b>2.5</b>	<b>100</b>	<b>1</b>	<b>1</b>	<b>9.9</b>	<b>7.0</b>	<b>0.25</b>	<b>365</b>
1N5351B	1N5351B	13.3	14	14.7	100	2.5	75	1	1	10.6	6.7	0.25	340
<b>1N5352B</b>	<b>1N5352B</b>	<b>14.25</b>	<b>15</b>	<b>15.75</b>	<b>75</b>	<b>2.5</b>	<b>75</b>	<b>1</b>	<b>1</b>	<b>11.5</b>	<b>6.3</b>	<b>0.25</b>	<b>315</b>
<b>1N5353B</b>	<b>1N5353B</b>	<b>15.2</b>	<b>16</b>	<b>16.8</b>	<b>75</b>	<b>2.5</b>	<b>75</b>	<b>1</b>	<b>1</b>	<b>12.2</b>	<b>6.0</b>	<b>0.3</b>	<b>295</b>
1N5354B	1N5354B	16.15	17	17.85	70	2.5	75	1	0.5	12.9	5.8	0.35	280
1N5355B	1N5355B	17.1	18	18.9	65	2.5	75	1	0.5	13.7	5.5	0.4	264
1N5356B	1N5356B	18.05	19	19.95	65	3	75	1	0.5	14.4	5.3	0.4	250
1N5357B	1N5357B	19	20	21	65	3	75	1	0.5	15.2	5.1	0.4	237
<b>1N5358B</b>	<b>1N5358B</b>	<b>20.9</b>	<b>22</b>	<b>23.1</b>	<b>50</b>	<b>3.5</b>	<b>75</b>	<b>1</b>	<b>0.5</b>	<b>16.7</b>	<b>4.7</b>	<b>0.45</b>	<b>216</b>
<b>1N5359B</b>	<b>1N5359B</b>	<b>22.8</b>	<b>24</b>	<b>25.2</b>	<b>50</b>	<b>3.5</b>	<b>100</b>	<b>1</b>	<b>0.5</b>	<b>18.2</b>	<b>4.4</b>	<b>0.55</b>	<b>198</b>
1N5360B	1N5360B	23.75	25	26.25	50	4	110	1	0.5	19	4.3	0.55	190
<b>1N5361B</b>	<b>1N5361B</b>	<b>25.65</b>	<b>27</b>	<b>28.35</b>	<b>50</b>	<b>5</b>	<b>120</b>	<b>1</b>	<b>0.5</b>	<b>20.6</b>	<b>4.1</b>	<b>0.6</b>	<b>176</b>
1N5362B	1N5362B	26.6	28	29.4	50	6	130	1	0.5	21.2	3.9	0.6	170

## 1. TOLERANCE AND TYPE NUMBER DESIGNATION

The JEDEC type numbers shown indicate a tolerance of  $\pm 5\%$ .

2. ZENER VOLTAGE ( $V_Z$ ) and IMPEDANCE ( $I_{ZT}$  and  $I_{ZK}$ )

Test conditions for zener voltage and impedance are as follows:  $I_Z$  is applied  $40 \pm 10$  ms prior to reading. Mounting contacts are located  $3/8''$  to  $1/2''$  from the inside edge of mounting clips to the body of the diode ( $T_A = 25^\circ\text{C} + 8^\circ\text{C}, -2^\circ\text{C}$ ).

3. SURGE CURRENT ( $I_R$ )

Surge current is specified as the maximum allowable peak, non-recurrent square-wave current with a pulse width, PW, of 8.3 ms. The data given in Figure 6 may be used to find the maximum surge current for a square wave of any pulse width between 1 ms and 1000 ms by plotting the applicable points on logarithmic paper. Examples of this, using the 3.3 V and 200 V zener are shown in Figure 7. Mounting contact located as specified in Note 2 ( $T_A = 25^\circ\text{C} + 8^\circ\text{C}, -2^\circ\text{C}$ ).

4. VOLTAGE REGULATION ( $\Delta V_Z$ )

The conditions for voltage regulation are as follows:  $V_Z$  measurements are made at 10% and then at 50% of the  $I_Z$  max value listed in the electrical characteristics table. The test current time duration for each  $V_Z$  measurement is  $40 \pm 10$  ms. Mounting contact located as specified in Note 2 ( $T_A = 25^\circ\text{C} + 8^\circ\text{C}, -2^\circ\text{C}$ ).

5. MAXIMUM REGULATOR CURRENT ( $I_{ZM}$ )

The maximum current shown is based on the maximum voltage of a 5% type unit, therefore, it applies only to the B-suffix device. The actual  $I_{ZM}$  for any device may not exceed the value of 5 watts divided by the actual  $V_Z$  of the device.  $T_L = 75^\circ\text{C}$  at  $3/8''$  maximum from the device body.

## 1N5333B Series

**ELECTRICAL CHARACTERISTICS** ( $T_A = 25^\circ\text{C}$  unless otherwise noted,  $V_F = 1.2\text{ V Max}$  @  $I_F = 1.0\text{ A}$  for all types)

Device (Note 6.)	Device Marking	Zener Voltage (Note 7.)				Zener Impedance (Note 7.)			Leakage Current		I <sub>R</sub> (Note 8.)	ΔV <sub>Z</sub> (Note 9.)	I <sub>ZM</sub> (Note 10.)
		V <sub>Z</sub> (Volts)			@ I <sub>ZT</sub>	Z <sub>ZT</sub> @ I <sub>ZT</sub>	Z <sub>ZK</sub> @ I <sub>ZK</sub>	I <sub>ZK</sub>	I <sub>R</sub> @ V <sub>R</sub>				
		Min	Nom	Max	mA	Ω	Ω	μA	μA Max	Volts	A	Volts	mA
1N5363B	1N5363B	28.5	30	31.5	40	8	140	1	0.5	22.8	3.7	0.6	158
1N5364B	1N5364B	31.35	33	34.65	40	10	150	1	0.5	25.1	3.5	0.6	144
<b>1N5365B</b>	<b>1N5365B</b>	<b>34.2</b>	<b>36</b>	<b>37.8</b>	<b>30</b>	<b>11</b>	<b>160</b>	<b>1</b>	<b>0.5</b>	<b>27.4</b>	<b>3.5</b>	<b>0.65</b>	<b>132</b>
1N5366B	1N5366B	37.05	39	40.95	30	14	170	1	0.5	29.7	3.1	0.65	122
1N5367B	1N5367B	40.85	43	45.15	30	20	190	1	0.5	32.7	2.8	0.7	110
<b>1N5368B</b>	<b>1N5368B</b>	<b>44.65</b>	<b>47</b>	<b>49.35</b>	<b>25</b>	<b>25</b>	<b>210</b>	<b>1</b>	<b>0.5</b>	<b>35.8</b>	<b>2.7</b>	<b>0.8</b>	<b>100</b>
1N5369B	1N5369B	48.45	51	53.55	25	27	230	1	0.5	38.8	2.5	0.9	93
1N5370B	1N5370B	53.2	56	58.8	20	35	280	1	0.5	42.6	2.3	1.0	86
1N5371B	1N5371B	57	60	63	20	40	350	1	0.5	45.5	2.2	1.2	79
1N5372B	1N5372B	58.9	62	65.1	20	42	400	1	0.5	47.1	2.1	1.35	76
1N5373B	1N5373B	64.6	68	71.4	20	44	500	1	0.5	51.7	2.0	1.52	70
1N5374B	1N5374B	71.25	75	78.75	20	45	620	1	0.5	56	1.9	1.6	63
1N5375B	1N5375B	77.9	82	86.1	15	65	720	1	0.5	62.2	1.8	1.8	58
1N5376B	1N5376B	82.65	87	91.35	15	75	760	1	0.5	66	1.7	2.0	54.5
1N5377B	1N5377B	86.45	91	95.55	15	75	760	1	0.5	69.2	1.6	2.2	52.5
1N5378B	1N5378B	95	100	105	12	90	800	1	0.5	76	1.5	2.5	47.5
1N5379B	1N5379B	104.5	110	115.5	12	125	1000	1	0.5	83.6	1.4	2.5	43
1N5380B	1N5380B	114	120	126	10	170	1150	1	0.5	91.2	1.3	2.5	39.5
1N5381B	1N5381B	123.5	130	136.5	10	190	1250	1	0.5	98.8	1.2	2.5	36.6
1N5382B	1N5382B	133	140	147	8	230	1500	1	0.5	106	1.2	2.5	34
<b>1N5383B</b>	<b>1N5383B</b>	<b>142.5</b>	<b>150</b>	<b>157.5</b>	<b>8</b>	<b>330</b>	<b>1500</b>	<b>1</b>	<b>0.5</b>	<b>114</b>	<b>1.1</b>	<b>3.0</b>	<b>31.6</b>
1N5384B	1N5384B	152	160	168	8	350	1650	1	0.5	122	1.1	3.0	29.4
1N5385B	1N5385B	161.5	170	178.5	8	380	1750	1	0.5	129	1.0	3.0	28
1N5386B	1N5386B	171	180	189	5	430	1750	1	0.5	137	1.0	4.0	26.4
1N5387B	1N5387B	180.5	190	199.5	5	450	1850	1	0.5	144	0.9	5.0	25
1N5388B	1N5388B	190	200	210	5	480	1850	1	0.5	152	0.9	5.0	23.6

**6. TOLERANCE AND TYPE NUMBER DESIGNATION**

The JEDEC type numbers shown indicate a tolerance of  $\pm 5\%$ .

**7. ZENER VOLTAGE ( $V_Z$ ) and IMPEDANCE ( $I_{ZT}$  and  $I_{ZK}$ )**

Test conditions for zener voltage and impedance are as follows:  $I_Z$  is applied  $40 \pm 10$  ms prior to reading. Mounting contacts are located  $3/8''$  to  $1/2''$  from the inside edge of mounting clips to the body of the diode ( $T_A = 25^\circ\text{C} + 8^\circ\text{C}, -2^\circ\text{C}$ ).

**8. SURGE CURRENT ( $I_R$ )**

Surge current is specified as the maximum allowable peak, non-recurrent square-wave current with a pulse width, PW, of 8.3 ms. The data given in Figure 6 may be used to find the maximum surge current for a square wave of any pulse width between 1 ms and 1000 ms by plotting the applicable points on logarithmic paper. Examples of this, using the 3.3 V and 200 V zener are shown in Figure 7. Mounting contact located as specified in Note 7 ( $T_A = 25^\circ\text{C} + 8^\circ\text{C}, -2^\circ\text{C}$ ).

**9. VOLTAGE REGULATION ( $\Delta V_Z$ )**

The conditions for voltage regulation are as follows:  $V_Z$  measurements are made at 10% and then at 50% of the  $I_Z$  max value listed in the electrical characteristics table. The test current time duration for each  $V_Z$  measurement is  $40 \pm 10$  ms. Mounting contact located as specified in Note 7 ( $T_A = 25^\circ\text{C} + 8^\circ\text{C}, -2^\circ\text{C}$ ).

**10. MAXIMUM REGULATOR CURRENT ( $I_{ZM}$ )**

The maximum current shown is based on the maximum voltage of a 5% type unit, therefore, it applies only to the B-suffix device. The actual  $I_{ZM}$  for any device may not exceed the value of 5 watts divided by the actual  $V_Z$  of the device.  $T_L = 75^\circ\text{C}$  at  $3/8''$  maximum from the device body.

# 1N5333B Series

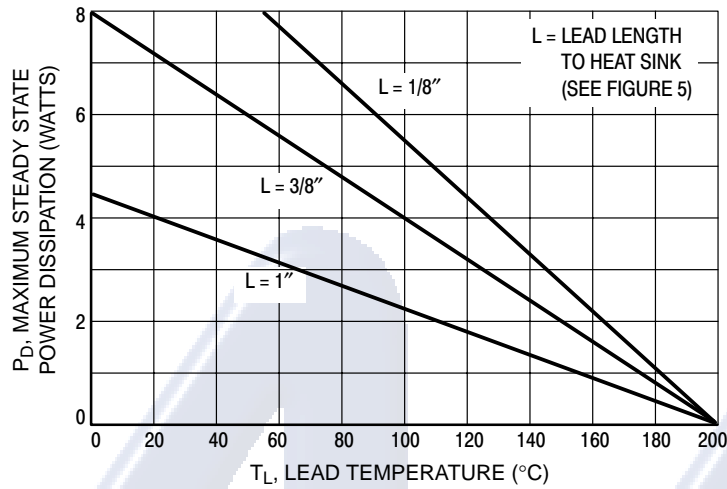


Figure 1. Power Temperature Derating Curve

## TEMPERATURE COEFFICIENTS

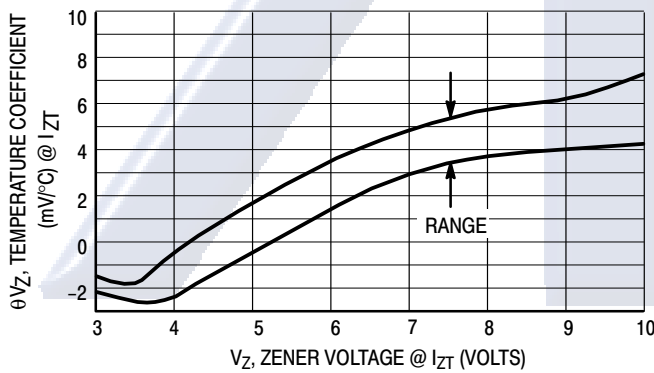


Figure 2. Temperature Coefficient-Range for Units 3 to 10 Volts



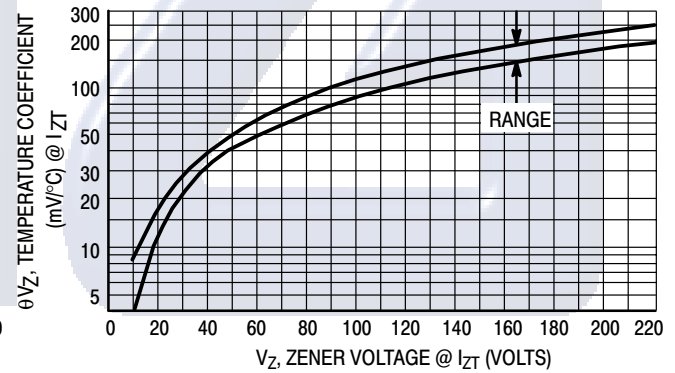


Figure 3. Temperature Coefficient-Range for Units 10 to 220 Volts


# 1N5333B Series

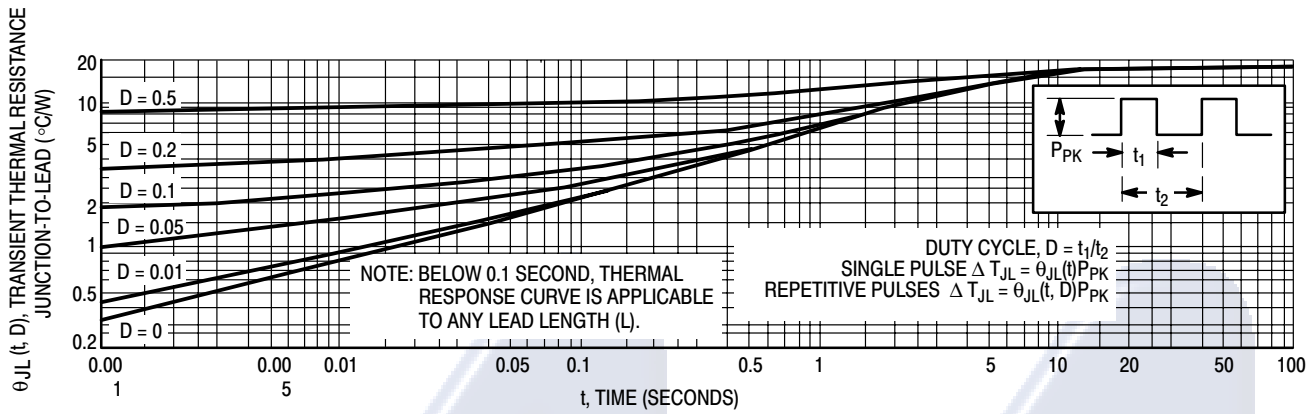


**Figure 4. Typical Thermal Response**  
L, Lead Length = 3/8 Inch

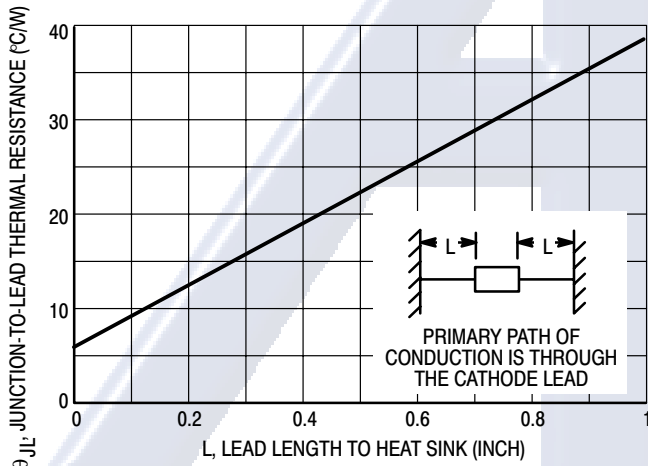


**Figure 5. Typical Thermal Resistance**

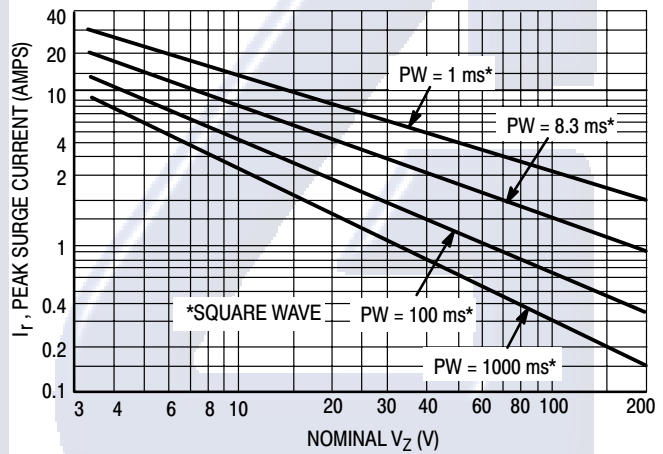

**Figure 6. Maximum Non-Repetitive Surge Current**  
versus Nominal Zener Voltage  
(See Note 3)

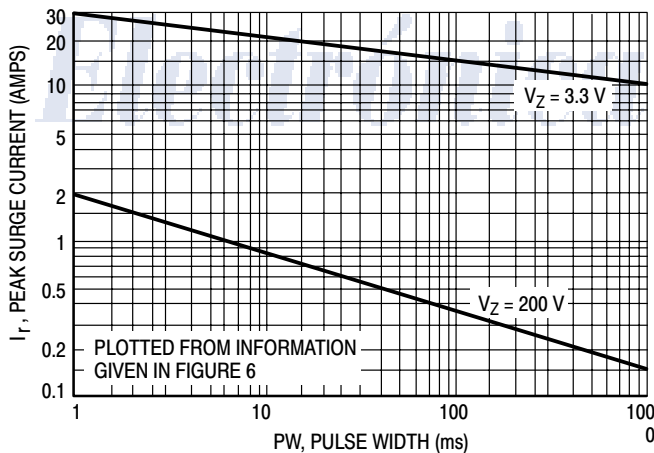

**Figure 7. Peak Surge Current versus Pulse Width**  
(See Note 3)

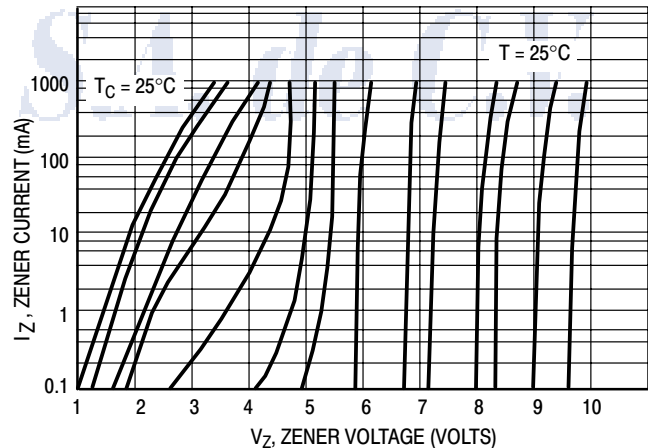

**Figure 8. Zener Voltage versus Zener Current**  
VZ = 3.3 thru 10 Volts

## 1N5333B Series

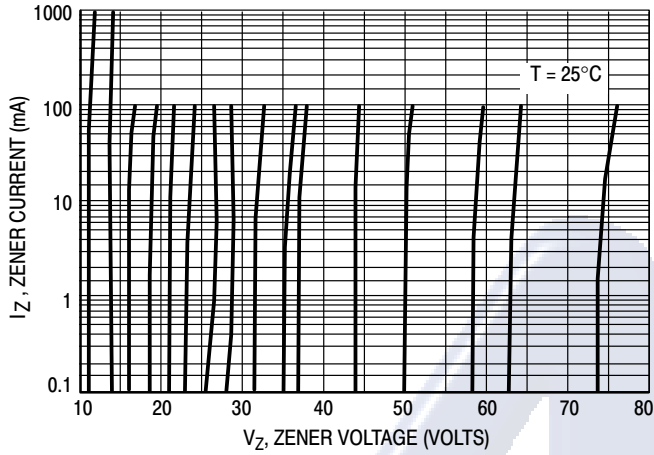


Figure 9. Zener Voltage versus Zener Current  
 $V_Z = 11$  thru 75 Volts

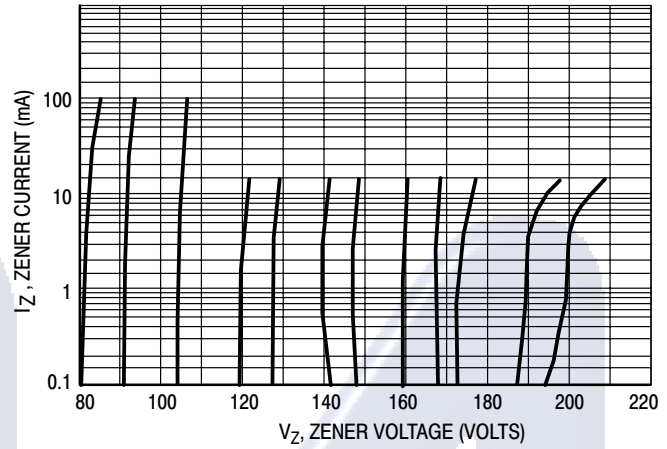


Figure 10. Zener Voltage versus Zener Current  
 $V_Z = 82$  thru 200 Volts

## APPLICATION NOTE

Since the actual voltage available from a given zener diode is temperature dependent, it is necessary to determine junction temperature under any set of operating conditions in order to calculate its value. The following procedure is recommended:

Lead Temperature,  $T_L$ , should be determined from:

$$T_L = \theta_{LA} P_D + T_A$$

$\theta_{LA}$  is the lead-to-ambient thermal resistance and  $P_D$  is the power dissipation.

Junction Temperature,  $T_J$ , may be found from:

$$T_J = T_L + \Delta T_{JL}$$

$\Delta T_{JL}$  is the increase in junction temperature above the lead temperature and may be found from Figure 4 for a train of power pulses or from Figure 5 for dc power.

$$\Delta T_{JL} = \theta_{JL} P_D$$

For worst-case design, using expected limits of  $I_Z$ , limits of  $P_D$  and the extremes of  $T_J$  ( $\Delta T_J$ ) may be estimated. Changes in voltage,  $V_Z$ , can then be found from:

$$\Delta V = \theta_{VZ} \Delta T_J$$

$\theta_{VZ}$ , the zener voltage temperature coefficient, is found from Figures 2 and 3.

Under high power-pulse operation, the zener voltage will vary with time and may also be affected significantly by the zener resistance. For best regulation, keep current excursions as low as possible.

Data of Figure 4 should not be used to compute surge capability. Surge limitations are given in Figure 6. They are lower than would be expected by considering only junction temperature, as current crowding effects cause temperatures to be extremely high in small spots resulting in device degradation should the limits of Figure 6 be exceeded.


## 1N5333B Series

## OUTLINE DIMENSIONS

## Zener Voltage Regulators – Axial Leaded

## 5 Watt DO-41 Surmetic™ 40

AXIAL LEAD  
CASE 17-02  
ISSUE C

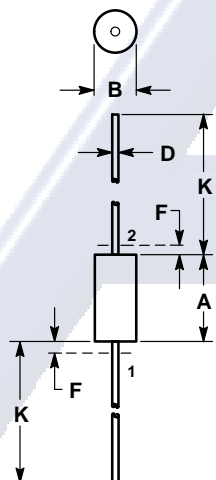


NOTES:  
1. LEAD DIAMETER AND FINISH NOT CONTROLLED  
WITHIN DIMENSION F.

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.330	0.350	8.38	8.89
B	0.130	0.145	3.30	3.68
D	0.037	0.043	0.94	1.09
F	---	0.050	---	1.27
K	1.000	1.250	25.40	31.75

STYLE 1:  
PIN 1. ANODE  
2. CATHODE

Surmetic is a trademark of Semiconductor Components Industries, LLC.

ON Semiconductor and  are trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer.

## PUBLICATION ORDERING INFORMATION

## NORTH AMERICA Literature Fulfillment:

Literature Distribution Center for ON Semiconductor  
P.O. Box 5163, Denver, Colorado 80217 USA  
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
Email: ONlit@hibbertco.com  
Fax Response Line: 303-675-2167 or 800-344-3810 Toll Free USA/Canada

## N. American Technical Support: 800-282-9855 Toll Free USA/Canada

## EUROPE: LDC for ON Semiconductor – European Support

German Phone: (+1) 303-308-7140 (Mon-Fri 2:30pm to 7:00pm CET)  
Email: ONlit-german@hibbertco.com  
French Phone: (+1) 303-308-7141 (Mon-Fri 2:00pm to 7:00pm CET)  
Email: ONlit-french@hibbertco.com  
English Phone: (+1) 303-308-7142 (Mon-Fri 12:00pm to 5:00pm GMT)  
Email: ONlit@hibbertco.com

## EUROPEAN TOLL-FREE ACCESS\*: 00-800-4422-3781

\*Available from Germany, France, Italy, UK, Ireland

## CENTRAL/SOUTH AMERICA:

Spanish Phone: 303-308-7143 (Mon-Fri 8:00am to 5:00pm MST)  
Email: ONlit-spanish@hibbertco.com  
Toll-Free from Mexico: Dial 01-800-288-2872 for Access –  
then Dial 866-297-9322

## ASIA/PACIFIC: LDC for ON Semiconductor – Asia Support

Phone: 1-303-675-2121 (Tue-Fri 9:00am to 1:00pm, Hong Kong Time)  
Toll Free from Hong Kong & Singapore:  
001-800-4422-3781  
Email: ONlit-asia@hibbertco.com

## JAPAN: ON Semiconductor, Japan Customer Focus Center

4-32-1 Nishi-Gotanda, Shinagawa-ku, Tokyo, Japan 141-0031  
Phone: 81-3-5740-2700  
Email: r14525@onsemi.com

ON Semiconductor Website: <http://onsemi.com>

For additional information, please contact your local  
Sales Representative.

1N5333B/D