



**Microsemi Corp.**  
The diode experts

SCOTTSDALE, AZ

For more information call:  
(602) 941-6300

# 1N4728A thru 1N4764A DO-41 GLASS

## FEATURES

- 3.3 THRU 100 VOLTS
- HERMETIC GLASS PACKAGE
- CONSULT FACTORY FOR VOLTAGES OVER 100 V

## MAXIMUM RATINGS

Junction and Storage Temperature: -65°C to +200°C

Power Dissipation at  $T_L$  100°C; 1.0 Watt

Power Derating from 100°C; 10 mW/°C

$T_L$  = lead temperature at 3/8" from body

## \*ELECTRICAL CHARACTERISTICS

[at +25°C ambient.]

Maximum forward voltage 1.2 volts at 200 mA

| JEDEC<br>TYPE<br>NUMBER<br>(Note 1) | ZENER<br>VOLTAGE<br>( $V_Z$ )<br>(NOTE 4) | TEST<br>CURRENT<br>( $I_{ZT}$ ) | MAXIMUM<br>DYNAMIC<br>IMPEDANCE<br>( $Z_{ZT}$ @ $I_{ZT}$ )<br>(Note 2) | MAXIMUM<br>REVERSE<br>CURRENT<br>( $I_R$ @ $V_R$ ) | TEST<br>VOLTAGE<br>( $V_R$ ) | MAXIMUM<br>REGULATOR<br>CURRENT<br>( $I_{ZM}$ )<br>$T_A = 50^\circ\text{C}$ | MAXIMUM<br>KNEE<br>IMPEDANCE<br>( $Z_{ZK}$ @ $I_{ZK}$ )<br>(Note 2) | TEST<br>CURRENT<br>( $I_{ZK}$ ) | MAXIMUM<br>(SURGE)<br>CURRENT<br>( $I_S$ )<br>(Note 3) |
|-------------------------------------|-------------------------------------------|---------------------------------|------------------------------------------------------------------------|----------------------------------------------------|------------------------------|-----------------------------------------------------------------------------|---------------------------------------------------------------------|---------------------------------|--------------------------------------------------------|
|                                     | VOLTS                                     | mA                              | OHMS                                                                   | $\mu\text{A}$                                      | VOLTS                        | mA                                                                          | OHMS                                                                | mA                              | mA                                                     |
| 1N4728A                             | 3.3                                       | 76                              | 10                                                                     | 100                                                | 1                            | 276                                                                         | 400                                                                 | 1.0                             | 1380                                                   |
| 1N4729A                             | 3.6                                       | 69                              | 10                                                                     | 100                                                | 1                            | 252                                                                         | 400                                                                 | 1.0                             | 1260                                                   |
| 1N4730A                             | 3.9                                       | 64                              | 9                                                                      | 50                                                 | 1                            | 234                                                                         | 400                                                                 | 1.0                             | 1190                                                   |
| 1N4731A                             | 4.3                                       | 58                              | 9                                                                      | 10                                                 | 1                            | 217                                                                         | 400                                                                 | 1.0                             | 1070                                                   |
| 1N4732A                             | 4.7                                       | 53                              | 8                                                                      | 10                                                 | 1                            | 193                                                                         | 500                                                                 | 1.0                             | 970                                                    |
| 1N4733A                             | 5.1                                       | 49                              | 7                                                                      | 10                                                 | 1                            | 178                                                                         | 550                                                                 | 1.0                             | 890                                                    |
| 1N4734A                             | 5.6                                       | 45                              | 5                                                                      | 10                                                 | 2                            | 162                                                                         | 600                                                                 | 1.0                             | 810                                                    |
| 1N4735A                             | 6.2                                       | 41                              | 2                                                                      | 10                                                 | 3                            | 146                                                                         | 700                                                                 | 1.0                             | 730                                                    |
| 1N4736A                             | 6.8                                       | 37                              | 3.5                                                                    | 10                                                 | 4                            | 133                                                                         | 700                                                                 | 1.0                             | 660                                                    |
| 1N4737A                             | 7.5                                       | 34                              | 4.0                                                                    | 10                                                 | 5                            | 121                                                                         | 700                                                                 | 0.5                             | 605                                                    |
| 1N4738A                             | 8.2                                       | 31                              | 4.5                                                                    | 10                                                 | 6                            | 110                                                                         | 700                                                                 | 0.5                             | 550                                                    |
| 1N4739A                             | 9.1                                       | 28                              | 5.0                                                                    | 10                                                 | 7                            | 100                                                                         | 700                                                                 | 0.5                             | 500                                                    |
| 1N4740A                             | 10                                        | 25                              | 7                                                                      | 10                                                 | 7.6                          | 91                                                                          | 700                                                                 | 0.25                            | 454                                                    |
| 1N4741A                             | 11                                        | 23                              | 8                                                                      | 5                                                  | 8.4                          | 83                                                                          | 700                                                                 | 0.25                            | 414                                                    |
| 1N4742A                             | 12                                        | 21                              | 9                                                                      | 5                                                  | 9.1                          | 76                                                                          | 700                                                                 | 0.25                            | 380                                                    |
| 1N4743A                             | 13                                        | 19                              | 10                                                                     | 5                                                  | 9.9                          | 69                                                                          | 700                                                                 | 0.25                            | 344                                                    |
| 1N4744A                             | 15                                        | 17                              | 14                                                                     | 5                                                  | 11.4                         | 61                                                                          | 700                                                                 | 0.25                            | 304                                                    |
| 1N4745A                             | 16                                        | 15.5                            | 16                                                                     | 5                                                  | 12.2                         | 57                                                                          | 700                                                                 | 0.25                            | 285                                                    |
| 1N4746A                             | 18                                        | 14                              | 20                                                                     | 5                                                  | 13.7                         | 50                                                                          | 750                                                                 | 0.25                            | 250                                                    |
| 1N4747A                             | 20                                        | 12.5                            | 22                                                                     | 5                                                  | 15.2                         | 45                                                                          | 750                                                                 | 0.25                            | 225                                                    |
| 1N4748A                             | 22                                        | 11.5                            | 23                                                                     | 5                                                  | 16.7                         | 41                                                                          | 750                                                                 | 0.25                            | 205                                                    |
| 1N4749A                             | 24                                        | 10.5                            | 25                                                                     | 5                                                  | 18.2                         | 38                                                                          | 750                                                                 | 0.25                            | 190                                                    |
| 1N4750A                             | 27                                        | 9.5                             | 35                                                                     | 5                                                  | 20.6                         | 34                                                                          | 750                                                                 | 0.25                            | 170                                                    |
| 1N4751A                             | 30                                        | 8.5                             | 40                                                                     | 5                                                  | 22.8                         | 30                                                                          | 1000                                                                | 0.25                            | 150                                                    |
| 1N4752A                             | 33                                        | 7.5                             | 45                                                                     | 5                                                  | 25.1                         | 27                                                                          | 1000                                                                | 0.25                            | 135                                                    |
| 1N4753A                             | 36                                        | 7.0                             | 50                                                                     | 5                                                  | 27.4                         | 25                                                                          | 1000                                                                | 0.25                            | 125                                                    |
| 1N4754A                             | 39                                        | 6.5                             | 60                                                                     | 5                                                  | 29.7                         | 23                                                                          | 1000                                                                | 0.25                            | 115                                                    |
| 1N4755A                             | 43                                        | 6.0                             | 70                                                                     | 5                                                  | 32.7                         | 22                                                                          | 1500                                                                | 0.25                            | 110                                                    |
| 1N4756A                             | 47                                        | 5.5                             | 80                                                                     | 5                                                  | 35.8                         | 19                                                                          | 1500                                                                | 0.25                            | 95                                                     |
| 1N4757A                             | 51                                        | 5.0                             | 95                                                                     | 5                                                  | 38.8                         | 18                                                                          | 1500                                                                | 0.25                            | 90                                                     |
| 1N4758A                             | 56                                        | 4.5                             | 110                                                                    | 5                                                  | 42.6                         | 16                                                                          | 2000                                                                | 0.25                            | 80                                                     |
| 1N4759A                             | 62                                        | 4.0                             | 125                                                                    | 5                                                  | 47.1                         | 14                                                                          | 2000                                                                | 0.25                            | 70                                                     |
| 1N4760A                             | 68                                        | 3.7                             | 150                                                                    | 5                                                  | 51.7                         | 13                                                                          | 2000                                                                | 0.25                            | 65                                                     |
| 1N4761A                             | 75                                        | 3.3                             | 175                                                                    | 5                                                  | 56.0                         | 12                                                                          | 2000                                                                | 0.25                            | 60                                                     |
| 1N4762A                             | 82                                        | 3.0                             | 200                                                                    | 5                                                  | 62.2                         | 11                                                                          | 3000                                                                | 0.25                            | 55                                                     |
| 1N4763A                             | 91                                        | 2.8                             | 250                                                                    | 5                                                  | 69.2                         | 10                                                                          | 3000                                                                | 0.25                            | 50                                                     |
| 1N4764A                             | 100                                       | 2.5                             | 350                                                                    | 5                                                  | 76.0                         | 9                                                                           | 3000                                                                | 0.25                            | 45                                                     |

\*JEDEC Registered Data

## SILICON 1 WATT ZENER DIODES

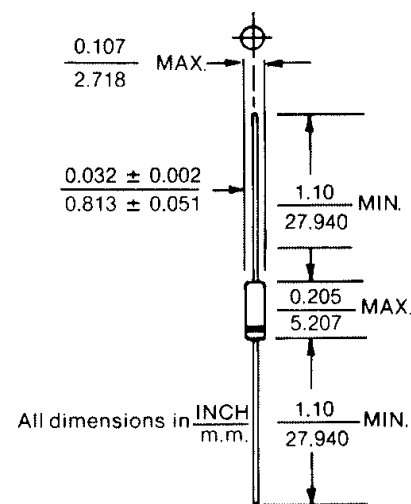


FIGURE 1

## MECHANICAL CHARACTERISTICS

CASE: Hermetically sealed glass case, DO-41.

FINISH: All external surfaces are corrosion resistant and leads solderable.

THERMAL RESISTANCE: Less than 100°C / Watt junction to lead at 0.375-inches from body.

POLARITY: Banded end is cathode.

WEIGHT: 0.378 grams (Typical).

# 1N4728A DO-41 thru 1N4764A DO-41

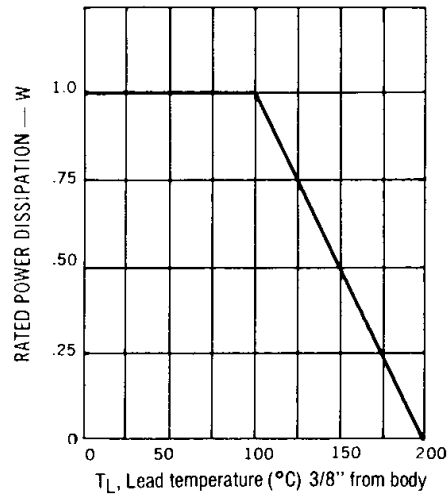


FIGURE 2. POWER DERATING CURVE

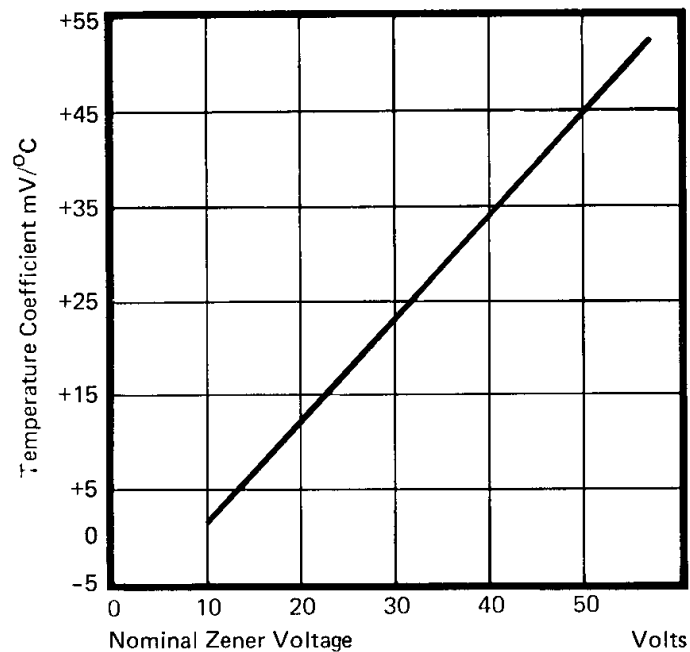


FIGURE 3. TYPICAL TEMPERATURE COEFFICIENT vs ZENER VOLTAGE

NOTE 1. The JEDEC type numbers shown with an A suffix have a 5% tolerance on nominal zener voltage. No suffix signifies a 10% tolerance, C signifies 2%, and D suffix signifies 1% tolerance.

NOTE 2. The Zener impedance is derived from the 60 Hz ac voltage, which results when an ac current having an rms value equal to 10% of the DC Zener current ( $I_{ZT}$  or  $I_{ZK}$ ) is superimposed on  $I_{ZT}$  or  $I_{ZK}$ . Zener impedance is measured at two points to insure

a sharp knee on the breakdown curve and eliminate unstable units.

NOTE 3. The reverse surge current is measured at  $25^{\circ}\text{C}$  ambient using a 1/2 square wave or equivalent sine wave pulse 1/120 second duration superimposed on  $I_{ZT}$ .

NOTE 4. Voltage measurements to be performed 90 seconds after application of DC current.