

ZENER 500mW VOLTAGE REGULATOR

PACKAGE STYLE: Zener 500mW (Suffix "US" denotes melf/surface mount packaging)


-All ratings are @ Tc = 25 °C unless otherwise specified.

-Operating -55 °C to +175 °C and storage -65 °C to +175 °C

Type	VZ2 nom at IZ2	VZ1 IZ1 250 µA	IZ2 test current	ZZT at IZ2	ZZK at 250 µA	IZM	VZ(reg)	VR	IR1 at +25°C	IR2 at TA = +150°C	avz
	V	minV	mA	Ω	Ω	mA	V	V	µA	µA	%/°C
1N6309	2.4	1.1	20	30	1200	177	1.50	1.0	100	200	-.085
1N6310	2.7	1.2	20	3029	1300	157	1.50	1.0	60	150	-.080
1N6311	3.0	1.3	20	27	1400	141	1.50	1.0	30	100	-.075
1N6312	3.3	1.5	20	25	1400	128	1.60	1.0	5	20	-.070
1N6313	3.6	1.5	20	23	1400	117	1.60	1.0	3	12	-.065
1N6314	3.9	1.8	20	20	1700	108	1.60	1.0	2	12	-.060
1N6315	4.3	2.0	20	17	1700	99	0.90	1.0	2	12	-.045 /+ .032
1N6316	4.7	2.4	20	14	1500	90	0.50	1.5	5	12	-.028 /+ .032
1N6317	5.1	2.8	20	8	1300	83	0.40	2.0	5	12	- .020/+ .035
1N6318	5.6	3.3	20	3	1200	76	0.40	2.5	5	10	+ .050
1N6319	6.2	4.3	20	3	800	68	0.30	3.5	5	10	+ .060
1N6320	6.8	6.0	20	3	400	63	0.35	4.0	2	50	+ .062
1N6321	7.5	6.6	20	4	400	57	0.40	5.0	2	30	+ .068
1N6322	8.2	7.5	20	5	400	52	0.40	6.0	1	10	+ .075
1N6323	9.1	8.4	20	6	500	47	0.50	7.0	1.00	10	+ .076
1N6324	10.0	9.1	20	6	500	43	0.50	8.0	1.00	10	+ .079
1N6325	11.0	10.0	20	7	550	39	0.50	8.5	1.00	10	+ .082
1N6326	12.0	11.0	20	7	550	35	0.55	9.0	1.00	10	+ .083
1N6327	13.0	11.9	9.5	8	550	33	0.55	9.9	0.05	10	+ .083
1N6328	15.0	13.8	8.5	10	600	28	0.70	11.0	0.05	10	+ .084
1N6329	16.0	14.7	7.8	12	600	27	0.75	12.0	0.05	10	+ .084
1N6330	18.0	16.6	7.0	14	600	24	0.85	14.0	0.05	10	+ .085
1N6331	20.0	18.5	6.2	18	500	21	0.95	15.0	0.05	10	+ .086
1N6332	22.0	20.4	5.6	20	500	19	1.05	17.0	0.05	10	+ .087
1N6333	24.0	22.3	5.2	24	500	18	1.15	18.0	0.05	10	+ .088
1N6334	27.0	25.2	4.6	27	500	16	1.30	21.0	0.05	10	+ .090
1N6335	30.0	28.0	4.2	32	500	14	1.45	23.0	0.05	10	+ .091
1N6336	33.0	30.9	3.8	40	600	13	1.60	25.0	0.05	10	+ .092
1N6337	36.0	33.7	3.4	50	600	12.0	1.75	27.0	0.05	10	+ .093
1N6338	39.0	36.6	3.2	55	700	11.0	1.90	30	0.05	10	+ .094
1N6339	43.0	40.4	3.0	65	800	9.9	2.10	33	0.05	10	+ .095
1N6340	47.0	44.2	2.7	75	900	9.0	2.25	36	0.05	10	+ .095

TECHNICAL DATA
DATA SHEET 5102, REV. -


Type	VZ2 nom at IZ2	VZ1 IZ1 250 μ A	IZ2 test current t	ZZT at IZ2	ZZK at 250 μ A	IZM	VZ(reg)	VR	IR1 at +25°C	IR2 at TA= +150°C	α_{VZ}
	V	minV	mA	Ω	Ω	mA	V	V	μ A	μ A	%/°C
1N6341	51.0	48.0	2.5	85	1,000	8.3	2.50	39	0.05	10	+0.096
1N6342	56.0	52.7	2.2	100	1,200	7.6	2.70	43	0.05	10	+0.097
1N6343	62.0	58.4	2.0	125	1,300	6.8	2.90	47	0.05	10	+0.099
1N6344	68.0	64.1	1.8	155	1,500	6.3	3.20	52	0.05	10	+0.101
1N6345	75.0	70.8	1.7	180	1,600	5.7	3.40	56	0.05	10	+0.103
1N6346	82.0	77.4	1.5	220	1,800	5.2	3.80	62	0.05	10	+0.105
1N6347	91.0	86.0	1.4	270	2,100	4.7	4.20	69	0.05	10	+0.108
1N6348	100.0	94.5	1.3	340	2,400	4.3	4.40	76	0.05	10	+0.110
1N6349	110.0	104.0	1.1	500	2,800	3.9	4.80	84	0.05	10	+0.110
1N6350	120.0	113.0	1.0	600	3,200	3.5	5.20	91	0.05	10	+0.110
1N6351	130.0	122	0.95	850	4,100	3.3	5.60	99	0.05	10	+0.110
1N6352	150.0	141	0.85	1,000	4,500	2.8	7.00	114	0.05	10	+0.110
1N6353	160.0	151	0.80	1,200	5,000	2.7	7.50	122	0.05	10	+0.110
1N6354	180.0	170	0.68	1,500	5,600	2.4	9.00	137	0.05	10	+0.110
1N6355	200.0	189	0.65	1,800	6,500	2.1	12.00	152	0.05	10	+0.110

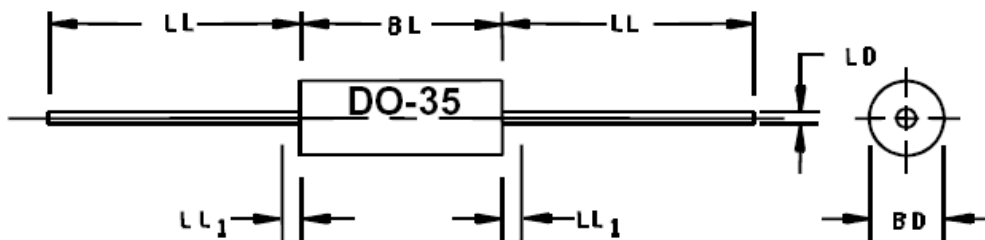MECHANICAL DIMENSIONS: Zener 500mW Package: In Inches / mm

Ltr	Dimensions				Notes
	Inches		Millimeters		
	Min	Max	Min	Max	
BD	.060	.090	1.52	2.29	
BL	.120	.200	3.05	5.08	5
LD	.018	.022	0.46	0.56	
LL	1.000	1.500	25.40	38.10	
LL ₁		.050		1.27	3

TECHNICAL DATA
DATA SHEET 5102, REV. -

MECHANICAL DIMENSIONS: Zener 500mW MELF Package: In Inches / mm

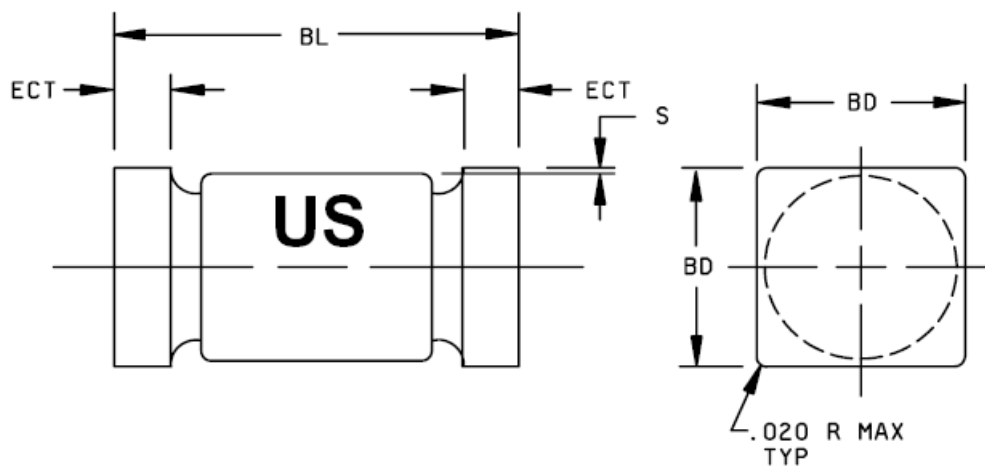

Symbol	Dimensions			
	Inches		Millimeters	
	Min	Max	Min	Max
BD	.070	.085	1.78	2.16
BL	.165	.195	4.19	4.95
ECT	.019	.028	0.48	0.71
S	.003 min		0.08 min	

TECHNICAL DATA
DATA SHEET 5102, REV. -

DISCLAIMER:

1- The information given herein, including the specifications and dimensions, is subject to change without prior notice to improve product characteristics. Before ordering, purchasers are advised to contact the Sensitron Semiconductor sales department for the latest version of the datasheet(s).

2- In cases where extremely high reliability is required (such as use in nuclear power control, aerospace and aviation, traffic equipment, medical equipment, and safety equipment), safety should be ensured by using semiconductor devices that feature assured safety or by means of users' fail-safe precautions or other arrangement.

3- In no event shall Sensitron Semiconductor be liable for any damages that may result from an accident or any other cause during operation of the user's units according to the datasheet(s). Sensitron Semiconductor assumes no responsibility for any intellectual property claims or any other problems that may result from applications of information, products or circuits described in the datasheets.

4- In no event shall Sensitron Semiconductor be liable for any failure in a semiconductor device or any secondary damage resulting from use at a value exceeding the absolute maximum rating.

5- No license is granted by the datasheet(s) under any patents or other rights of any third party or Sensitron Semiconductor.

6- The datasheet(s) may not be reproduced or duplicated, in any form, in whole or part, without the expressed written permission of Sensitron Semiconductor.

7- The products (technologies) described in the datasheet(s) are not to be provided to any party whose purpose in their application will hinder maintenance of international peace and safety nor are they to be applied to that purpose by their direct purchasers or any third party. When exporting these products (technologies), the necessary procedures are to be taken in accordance with related laws and regulations.