

**LA7806****B/W TV Synchronization, Deflection Circuit****Overview**

The LA7806 is a multifunctional integrated circuit which is based on the internal circuit of the LA7800, incorporates various functions required for synchronization and deflection circuits of monochromatic television set, and operates on line voltage or from battery. This IC was so designed as to streamline the set by making the device more compact (DIP-16) and reducing the number of parts.

The LA7806 differs from the LA7800 in the following points.

- No X-ray protection circuit is used.
- The ground pins for horizontal and vertical are provided separately.
- No horizontal regulator is used.
- Synchronizing separation output is for vertical only.

Functions

- Synchro separator.
- Horizontal oscillator.
- Horizontal AFC.
- Vertical oscillator.
- Vertical driver.
- Vertical blanking pulse making.


Features

- Multifunction and small-size (DIP-16).
- Minimum number of parts required.
- Horizontal and vertical oscillators being stable to variation of ambient temperature and supply voltage owing to small warming-up drift.
- Small variation of horizontal oscillation frequency.
- Good linearity and interlace owing to DC bias at vertical output stage being sampling controlled within retrace time.
- Vertical blanking pulse width being freely set up according to peripheral parts.

Package Dimensions

unit:mm

3006B-DIP16

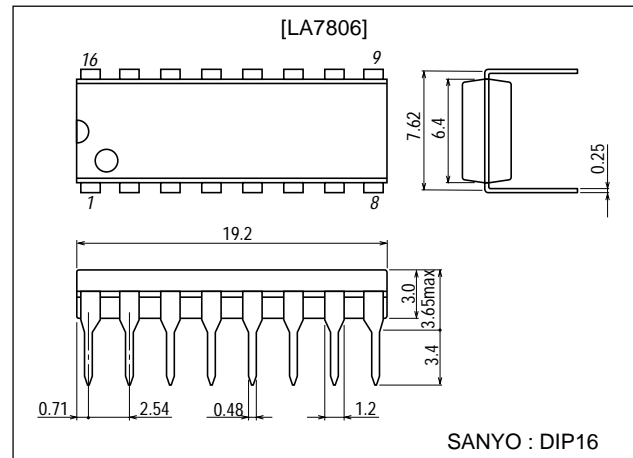

■ Any and all SANYO products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your SANYO representative nearest you before using any SANYO products described or contained herein in such applications.

■ SANYO assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all SANYO products described or contained herein.

LA7806

Specifications

Maximum Ratings at $T_a = 25^\circ\text{C}$


Parameter	Symbol	Conditions	Ratings	Unit
Maximum supply voltage	V_{12}, V_{15}		14	V
Allowable power dissipation	$P_d \text{ max}$	$T_a = 60^\circ\text{C}$	450	mW
Operating temperature	T_{opr}		-20 to +85	$^\circ\text{C}$
Storage temperature	T_{stg}		-55 to +125	$^\circ\text{C}$

Recommended Operating Conditions at $T_a = 25^\circ\text{C}$


Parameter	Symbol	Conditions	Ratings	Unit
Recommended supply voltage	V_{12}, V_{15}		12	V

Operating Characteristics at $T_a = 25^\circ\text{C}$, $V_{12} = V_{15} = 12\text{V}$

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
V_{CC12} current drain	I_{CC12}		10.0		19.0	mA
V_{CC15} current drain	I_{CC15}		6.0		11.0	mA
Vertical frequency pull-in range			9.0		11.0	Hz
Vertical free-running frequency	f_V	f_V center 55Hz	50		60	Hz
Supply voltage dependence of vertical frequency		$V_{12} = 12 \pm 1\text{V}$, 55Hz at 12V	-0.5		+0.5	Hz
Temperature characteristic of vertical frequency		$T_a = -10$ to $+60^\circ\text{C}$	-0.028		+0.028	Hz/ $^\circ\text{C}$
Vertical driver amplification factor			4.0		7.0	times
Horizontal free-running frequency	f_H	f_H center 15.750kHz	-750		+750	Hz
Supply voltage dependence of horizontal frequency		$V_{15} = 12 \pm 1\text{V}$, 15.750kHz at 12V	-50		+50	Hz
Temperature characteristic of horizontal frequency		$T_a = -10$ to $+60^\circ\text{C}$	-3.4		+3.4	Hz/ $^\circ\text{C}$
Horizontal output pulse width		$f_H = 15.750\text{kHz}$	21.5		26.5	μs
Horizontal output drive current			4.2		7.8	mA

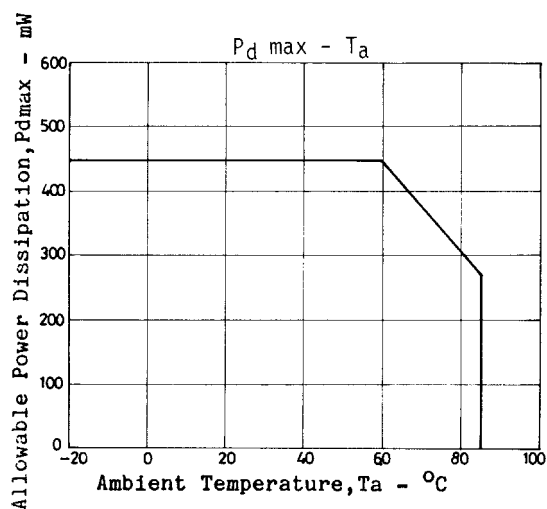

Sample Application Circuit

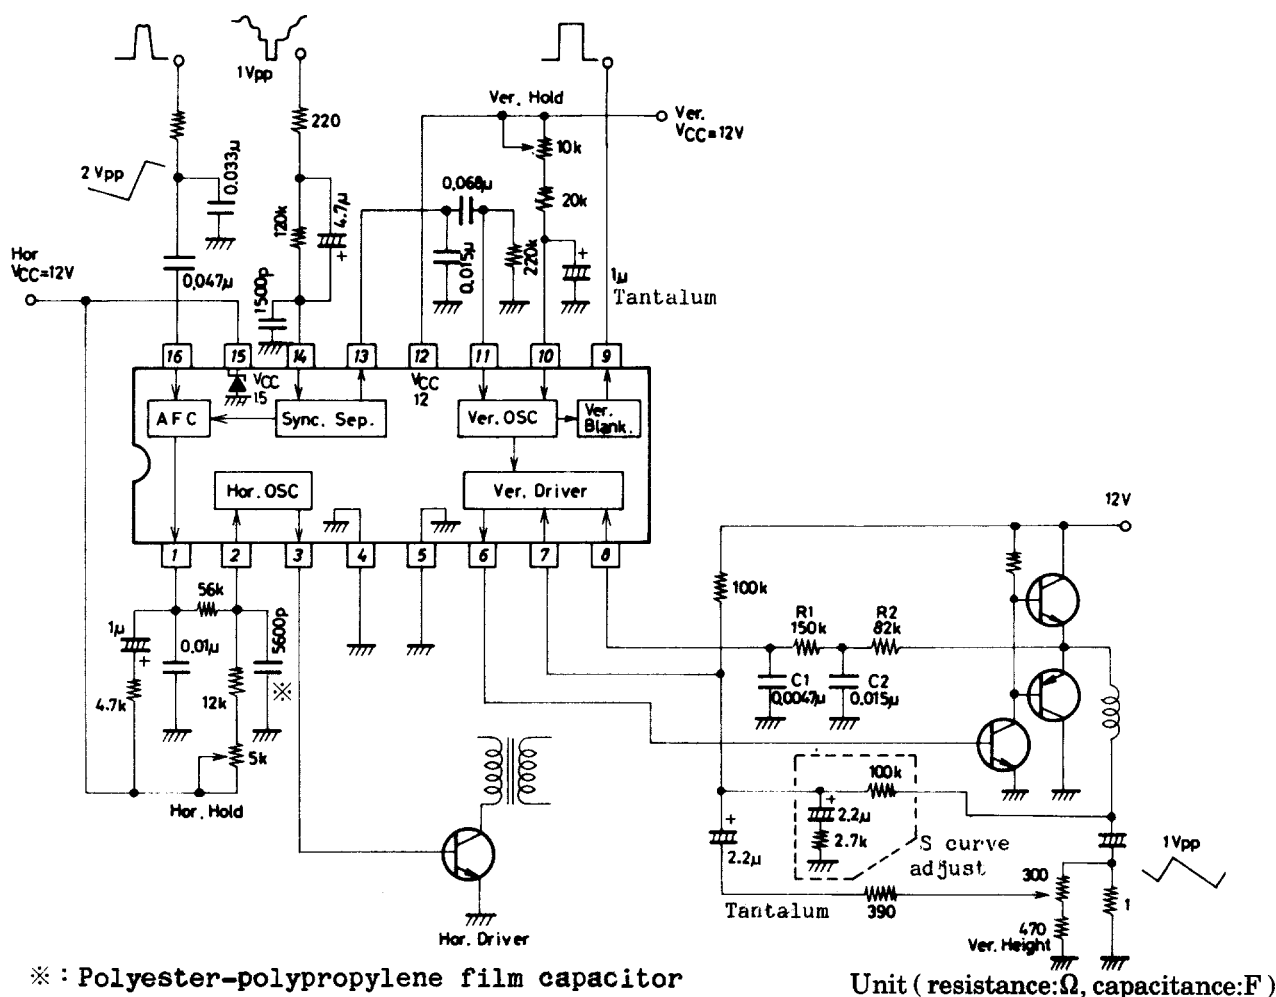

Note) 1. The vertical output circuit is shown by the basic circuit.

2. The peripheral parts at pin 8 should be changed in accordance with the Ver. Out circuit conditions.

3. The limiting resistor (220Ω : 1Vp-p) at pin 14 should be changed in proportion to the magnitude of the input video signal.

4. In the time constant circuit (120kΩ, 4.7μF) at pin 14, the time constant should be changed by changing the resistance value in accordance with the DC level of the input video signal and then by changing the capacitance value.

Peripheral parts at pin 8 (other applications)

	R1	C1	R2	C2
Line operate	220kΩ	0.01μF	68kΩ	0.068μF
Battery drive (pump-up)	220kΩ	0.0033μF	82kΩ	0.068μF