

# MITSUBISHI (AV COMMON) M5218AL/P/FP

## DUAL LOW-NOISE OPERATIONAL AMPLIFIERS (DUAL POWER SUPPLY TYPE)

### DESCRIPTION

The M5218 are semiconductor integrated circuits designed for a low noise preamplifier in audio equipment and a general-purpose operational amplifier in other electronic equipment. Two low noise operational amplifier circuits displaying internal phase-compensated high gain and low distortion are contained in an 8-pin SIP, DIP or FP for application over a wide range as a general-purpose dual amplifier in general electronic equipment.

The devices have virtually the same characteristics as the 4557, 4558, 4559 and 741 operational amplifiers.

The units can also be used as a single power supply type and amplifier in portable equipment. It is also suitable as a headphone amplifier because of its high load current.

### FEATURES

- High gain, low distortion  
.....  $G_{VO}=110\text{dB}$ ,  $T_{HE}=0.0015\%$ (typ.)
- High slew rate, high  $f_T$   
.....  $SR=3.0\text{V}/\mu\text{s}$ ,  $f_T=7\text{MHz}$ (typ.)
- Low noise ( $R_S=1\text{k}\Omega$ ) FLAT .....  $V_{NI}=2\mu\text{Vrms}$ (typ.)  
RIAA .....  $V_{NI}=1\mu\text{Vrms}$ (typ.)
- Operation with low supply voltage  
.....  $V_{CC}\geq 4\text{V}(\pm 2\text{V})$
- High load current, high power dissipation  
.....  $I_{LP}=\pm 50\text{mA}$ ,  $P_d=800\text{mW}$ (SIP)  
 $P_d=625\text{mW}$ (DIP),  $P_d=440\text{mW}$ (FP)


### APPLICATION

General-purpose amplifier in stereo equipment, tape decks, and radio stereo cassette recorders; active filters, servo amplifiers, operational circuits in other general electronic equipment.


### RECOMMENDED OPERATING CONDITIONS

- Supply voltage range .....  $\pm 2 \sim \pm 16\text{V}$
- Rated supply voltage .....  $\pm 15\text{V}$

### PIN CONFIGURATION (TOP VIEW)

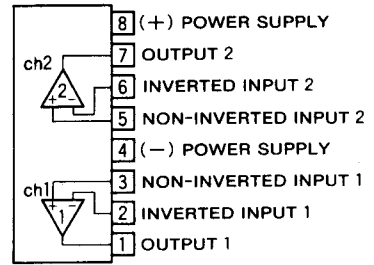


Outline 8P5 (AL)

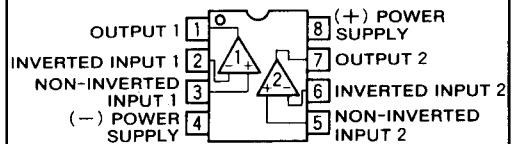

Outline 8P4 (AP)  
8P2S-A (AFP)

### BLOCK DIAGRAM

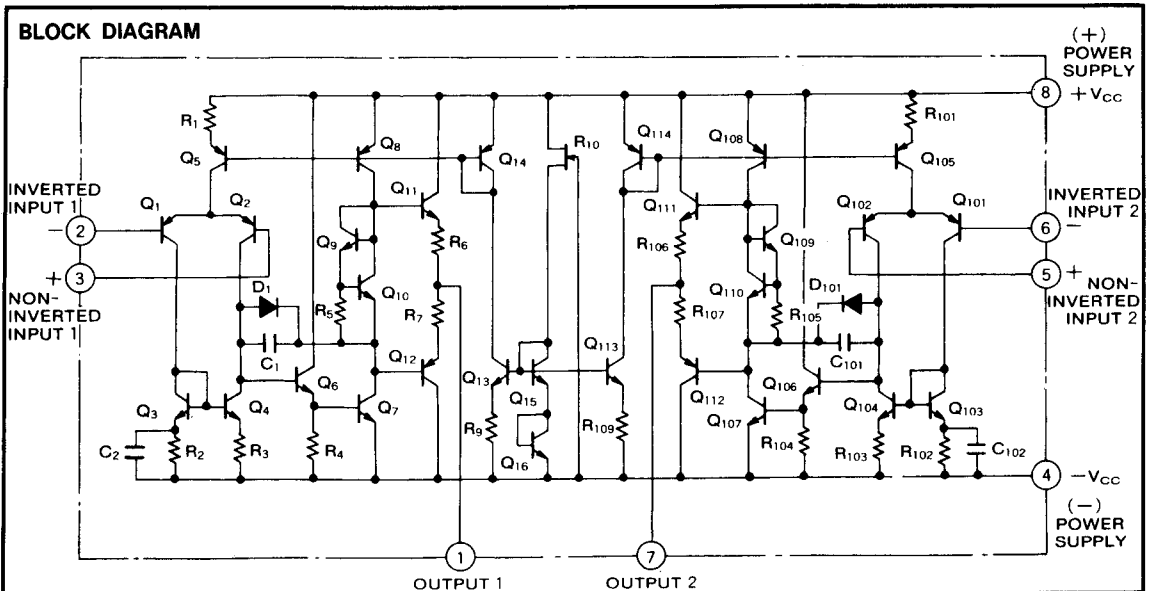

**DUAL LOW-NOISE OPERATIONAL AMPLIFIERS (DUAL POWER SUPPLY TYPE)**



**ABSOLUTE MAXIMUM RATINGS** ( $T_a=25^\circ\text{C}$ , unless otherwise noted)

| Symbol     | Parameter                  | Conditions                  | Ratings                   | Unit  |
|------------|----------------------------|-----------------------------|---------------------------|-------|
| $V_{CC}$   | Supply voltage             |                             | $\pm 18$                  | V     |
| $I_{LP}$   | Load current               |                             | $\pm 50$                  | mA    |
| $V_{id}$   | Differential input voltage |                             | $\pm 30$                  | V     |
| $V_{ic}$   | Common input voltage       |                             | $\pm 15$                  | V     |
| $P_d$      | Power dissipation          |                             | 800(SIP)/625(DIP)/440(FP) | mW    |
| $K_\theta$ | Thermal dirating           | $T_a \geq 25^\circ\text{C}$ | 8(SIP)/6.25(DIP)/4.4(FP)  | mW/°C |
| $T_{opr}$  | Ambient temperature        |                             | $-20 \sim +75$            | °C    |
| $T_{stg}$  | Storage temperature        |                             | $-55 \sim +125$           | °C    |

**ELECTRICAL CHARACTERISTICS** ( $T_a=25^\circ\text{C}$ ,  $V_{CC}=\pm 15\text{V}$ )


| Symbol   | Parameter                    | Test conditions   | Limits   |          |      | Unit             |
|----------|------------------------------|---|----------|----------|------|------------------|
|          |                              |   | Min.     | Typ.     | Max. |                  |
| $I_{CC}$ | Circuit current              | $V_{in}=0$  |          | 3.0      | 6.0  | mA               |
| $V_{IO}$ | Input offset voltage         | $R_S \leq 10\text{k}\Omega$                                   |          | 0.5      | 6.0  | mV               |
| $I_{IO}$ | Input offset current         |   |          | 5        | 200  | nA               |
| $I_{IB}$ | Input bias current           |   |          |          | 500  | nA               |
| $R_{in}$ | Input resistance             |   | 0.3      | 5        |      | MΩ               |
| $G_{VO}$ | Open loop voltage gain       | $R_L \geq 2\text{k}\Omega, V_o = \pm 10\text{V}$              | 86       | 110      |      | dB               |
| $V_{OM}$ | Maximum output voltage       | $R_L \geq 10\text{k}\Omega$                                   | $\pm 12$ | $\pm 14$ |      | V                |
|          |                              | $R_L \geq 2\text{k}\Omega$                                    | $\pm 10$ | $\pm 13$ |      |                  |
| $V_{CM}$ | Common input voltage range   |   | $\pm 12$ | $\pm 14$ |      | V                |
| CMRR     | Common mode rejection ratio  | $R_S \leq 10\text{k}\Omega$                                   | 70       | 90       |      | dB               |
| SVRR     | Sypply voltage               | $R_S \leq 10\text{k}\Omega$                                   |          | 30       | 150  | $\mu\text{V/V}$  |
| $P_d$    | Power dissipation            |   |          | 90       | 180  | mW               |
| SR       | Slew rate                    | $G_v=0\text{dB}, R_L=2\text{k}\Omega$                         |          | 3.0      |      | V/ $\mu\text{s}$ |
| $f_T$    | Gain bandwidth product       |   |          | 7        |      | MHz              |
| $V_{NI}$ | input referred noise voltage | $R_S=1\text{k}\Omega, \text{BW}:10\text{Hz}\sim 30\text{kHz}$ |          | 2.0      |      | $\mu\text{Vrms}$ |

**TYPICAL CHARACTERISTICS**

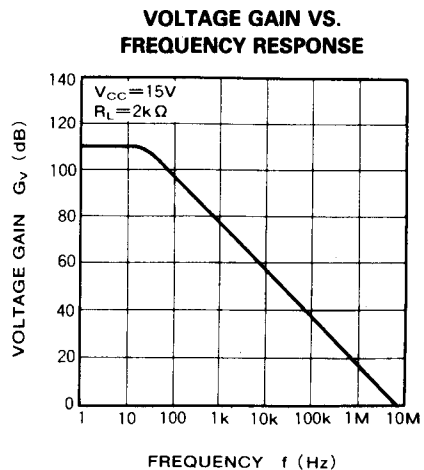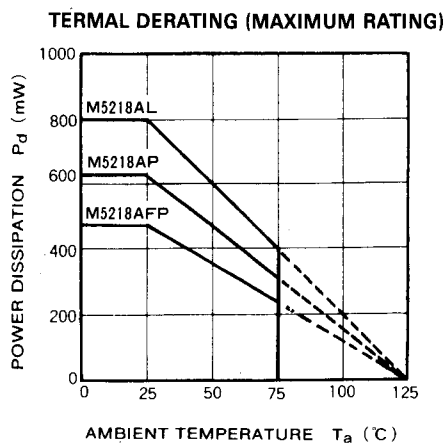


**DUAL LOW-NOISE OPERATIONAL AMPLIFIERS (DUAL POWER SUPPLY TYPE)**


**CIRCUIT CURRENT VS. SUPPLY VOLTAGE**

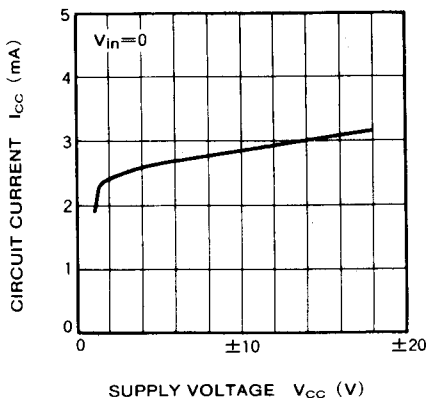


**CIRCUIT CURRENT VS. AMBIENT TEMPERATURE**

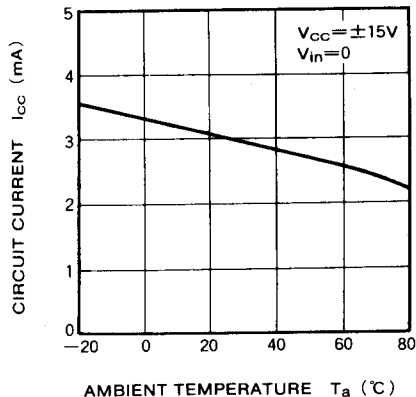


**INPUT OFFSET VOLTAGE VS. AMBIENT TEMPERATURE**

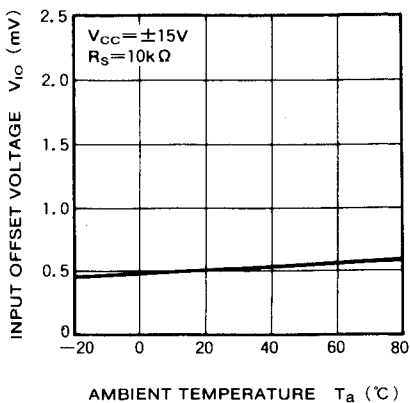


**OUTPUT VOLTAGE / LOAD CURRENT PEAK VS. LOAD RESISTANCE**

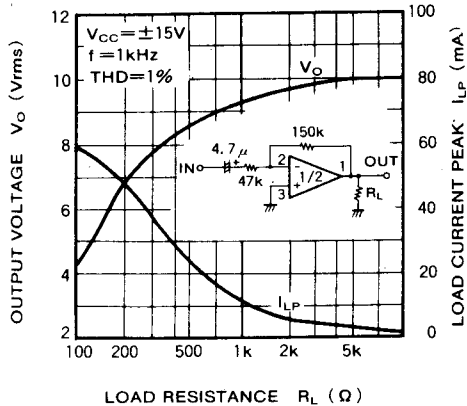

**MAXIMUM OUTPUT VOLTAGE VS. SUPPLY VOLTAGE**

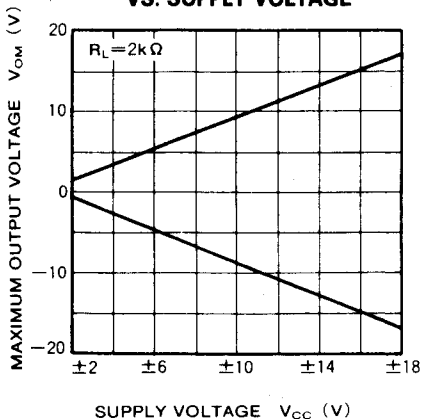


**MAXIMUM OUTPUT VOLTAGE VS. FREQUENCY RESPONSE**

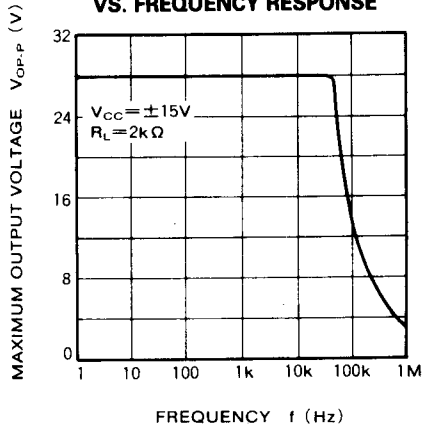

**DUAL LOW-NOISE OPERATIONAL AMPLIFIERS (DUAL POWER SUPPLY TYPE)**

**APPLICATION EXAMPLES**


**(1) Stereo Equalizer amplifier circuit**

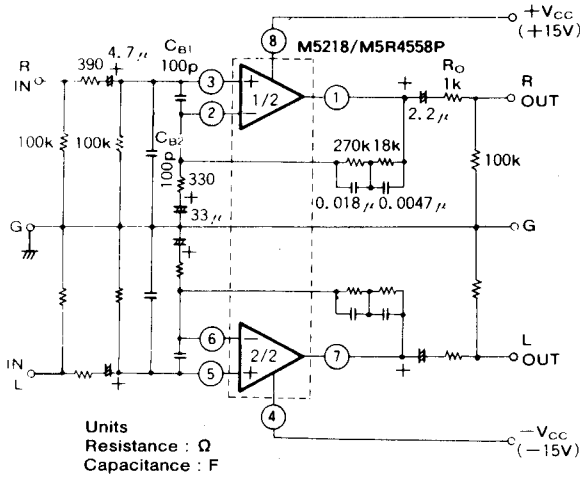

**TYPICAL CHARACTERISTICS ( $V_{CC} = \pm 15V$ , RIAA)**


- $G_V = 35.6\text{dB}$  ( $f = 1\text{kHz}$ )
- $V_{NI} = 1\ \mu\text{Vrms}$  ( $R_S = 1\text{k}\Omega$ ,  $BW = 20\text{Hz} \sim 30\text{kHz}$ )
- Signal-to-noise = 72.5dB (IHF-A network, shorted input, 2.5mVrms input sensitivity)
- THD = 0.0015% ( $f = 1\text{kHz}$ ,  $V_O = 3\text{Vrms}$ )

**TOTAL HARMONIC DISTORTION VS. OUTPUT VOLTAGE**

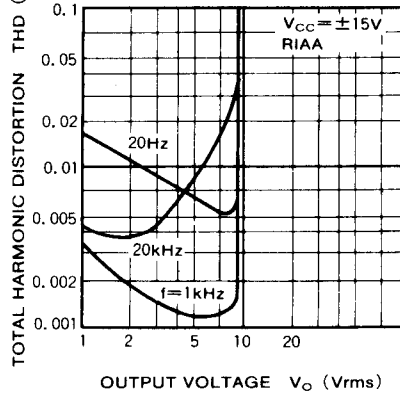


Left channel circuit constants are identical to those of right channel.  
 $C_{B1}$ ,  $C_{B2}$ : Capacitors for buzz prevention, use if required.  
 $R_O$ : Resistor used to prevent parasitic oscillation for capacitive loads and current limiting with shorted and other abnormal load conditions.

**OUTPUT NOISE VOLTAGE VS. SIGNAL SOURCE RESISTANCE**

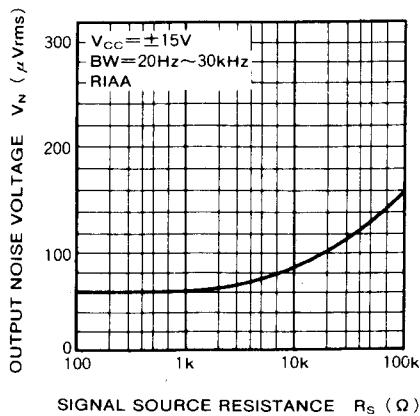

**SIGNAL-TO-NOISE RATIO VS. SIGNAL SOURCE RESISTANCE**

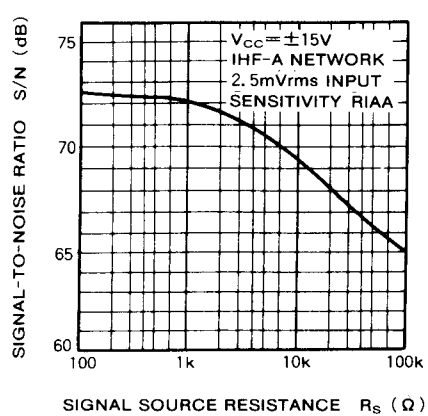


**DUAL LOW-NOISE OPERATIONAL AMPLIFIERS (DUAL POWER SUPPLY TYPE)**


**(2) High S / N stereo DC ICL equalizer**

**TYPICAL CHARACTERISTICS** ( $V_{CC} = \pm 15V$ , RIAA)

- Signal-to-noise = 72.5dB (IHF-A network, shorted input, 2.5mVrms input sensitivity)
- $V_{NI} = 0.77 \mu V_{rms}$  ( $R_S = 5.1k\Omega$ ,  $BW = 5Hz \sim 100kHz$ )
- $G_V = 35.6dB$  ( $f = 1kHz$ )

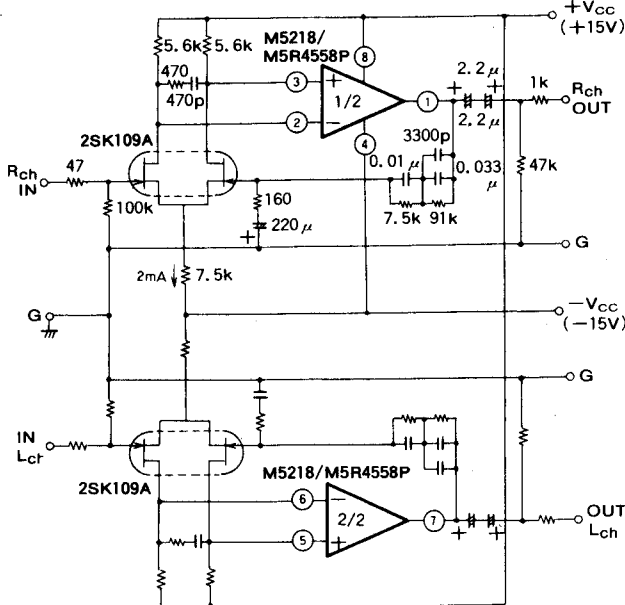

**TOTAL HARMONIC DISTORTION VS. OUTPUT VOLTAGE**

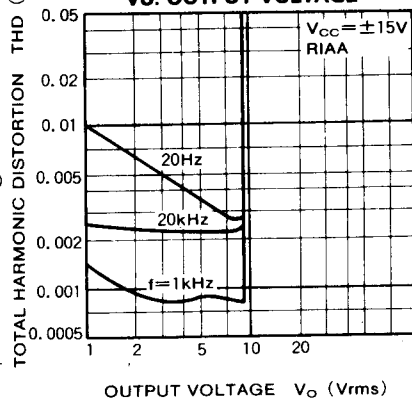


Left channel circuit constants are identical to those of right channel.


Units Resistance :  $\Omega$   
Capacitance : F

**(3) Headphone amplifier**

**TOTAL HARMONIC DISTORTION VS. OUTPUT VOLTAGE**

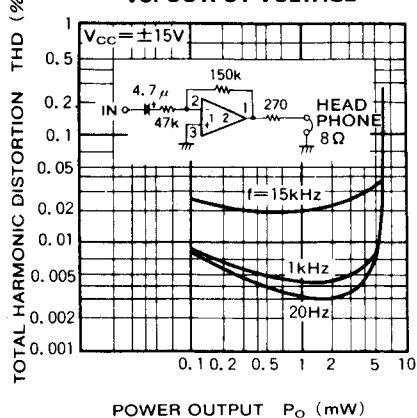





**(Output resistance  $R_O$  is made the parameter) POWER OUTPUT / POWER DISSIPATION VS. SUPPLY VOLTAGE**

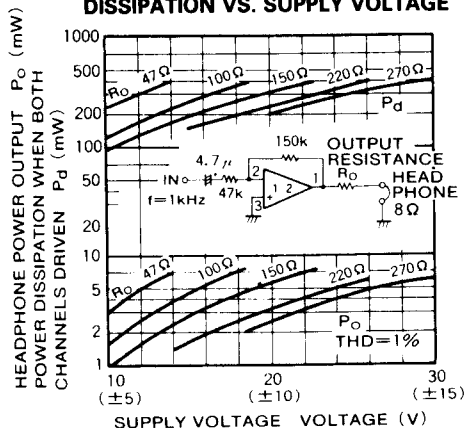


# 8P2S-A

## Plastic 8pin 225mil SOP

|                   |            |           |               |
|-------------------|------------|-----------|---------------|
| EIAJ Package Code | JEDEC Code | Weight(g) | Lead Material |
| SOP8-P-225-1.27   | -          | 0.07      | Cu Alloy      |

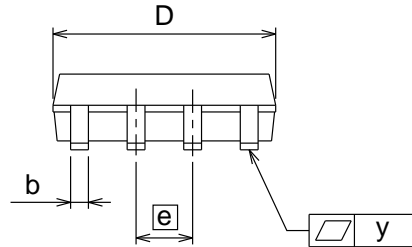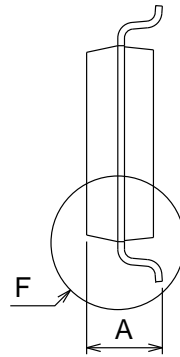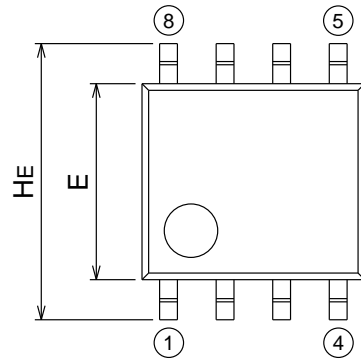

Detail F

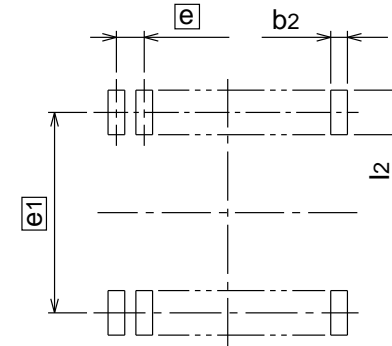

Recommended Mount Pad

| Symbol   | Dimension in Millimeters |      |     |
|----------|--------------------------|------|-----|
|          | Min                      | Nom  | Max |
| A        | -                        | -    | 1.9 |
| A1       | 0.05                     | -    | -   |
| A2       | -                        | 1.5  | -   |
| b        | 0.35                     | 0.4  | 0.5 |
| c        | 0.13                     | 0.15 | 0.2 |
| D        | 4.8                      | 5.0  | 5.2 |
| E        | 4.2                      | 4.4  | 4.6 |
| e        | -                        | 1.27 | -   |
| HE       | 5.9                      | 6.2  | 6.5 |
| L        | 0.2                      | 0.4  | 0.6 |
| L1       | -                        | 0.9  | -   |
| y        | -                        | -    | 0.1 |
| $\theta$ | 0°                       | -    | 10° |
| b2       | -                        | 0.76 | -   |
| e1       | -                        | 5.72 | -   |
| l2       | 1.27                     | -    | -   |