

Ordering number: EN 1290C

SANYO

No.1290C

2SA1348/2SC3402

PNP/ NPN Epitaxial Planar Silicon Transistors

Switching Applications
(with Bias Resistance)**Applications**

Switching circuit, inverter, interface circuit, driver

Features

- Built-in bias resistor ($R_1=10k\Omega$, $R_2=10k\Omega$).
- Small-sized package (SPA).

(): 2SA1348

Absolute Maximum Ratings/ $T_a=25^\circ\text{C}$

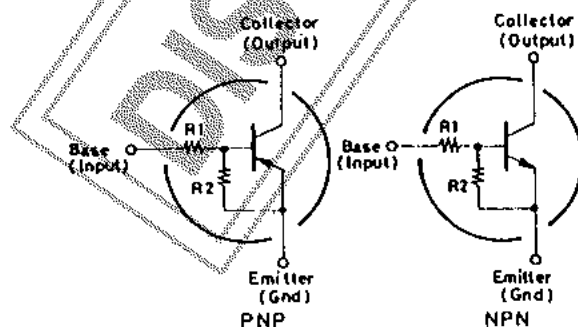
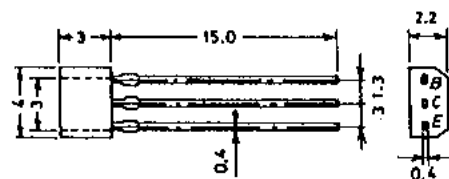
Collector to Base Voltage	V_{CBO}	(-) 50	V
Collector to Emitter Voltage	V_{CEO}	(-) 50	V
Emitter to Base Voltage	V_{EBO}	(-) 10	V
Collector Current	I_C	(-) 100	mA
Collector Current(Pulse)	I_{CP}	(-) 200	mA
Collector Dissipation	P_C	300	mW
Junction Temperature	T_j	150	$^\circ\text{C}$
Storage Temperature	T_{stg}	-55 to $+150$	$^\circ\text{C}$

unit

Electrical Characteristics/ $T_a=25^\circ\text{C}$

			min	typ	max	unit
Collector Cutoff Current	I_{CBO}	$V_{CB}=(-)40\text{V}$, $I_E=0$			(-) 0.1	μA
Collector Cutoff Current	I_{CEO}	$V_{CE}=(-)40\text{V}$, $I_B=0$			(-) 0.5	μA
Emitter Cutoff Current	I_{EBO}	$V_{EB}=(-)5\text{V}$, $I_C=0$	(-) 170	(-) 250	(-) 330	μA
DC Current Gain	h_{FE}	$V_{CE}=(-)5\text{V}$, $I_C=(-)10\text{mA}$	50			
Gain-bandwidth product	f_T	$V_{CE}=(-)10\text{V}$, $I_C=(-)5\text{mA}$		250 (200)		MHz
Output Capacitance	C_{ob}	$V_{CB}=(-)10\text{V}$, $f=1\text{MHz}$		3.7 (5.5)		pF
Collector to Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=(-)10\text{mA}$, $I_B=(-)0.5\text{mA}$	(-) 0.1	(-) 0.3		V

Continued on next page.

Electrical Connection**Case Outline 2033
(unit: mm)**

B: Base
C: Collector
E: Emitter
SANYO: SPA

Specifications and information herein are subject to change without notice.

SANYO Electric Co., Ltd. Semiconductor Business Headquarters
TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110 JAPAN

3237KI/ 3075KI/ 4143KI, TS, No. 1290-1/2

2SA1348/2SC3402

Continued from preceding page.

			min	typ	max	unit
Collector to Base Breakdown Voltage	$V_{(BR)CBO}$	$I_C = (-)10\mu A, I_E = 0$	$(-)50$			V
Collector to Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C = (-)100\mu A, R_{BE} = \infty$	$(-)50$			V
Input Off Voltage	$V_{I(off)}$	$V_{CE} = (-)5V, I_C = (-)100\mu A$	$(-)0.8$	$(-)1.1$	$(-)1.5$	V
Input On Voltage	$V_{I(on)}$	$V_{CE} = (-)0.2V, I_C = (-)10mA$	$(-)1.0$	$(-)2.0$	$(-)4.0$	V
Input Resistance	R_1		7.0	10	13	k Ω
Input Resistance Ratio	R_1/R_2		0.9	1.0	1.1	

■ Sample Application Circuit

Input ON-state voltage: 4V or more

Input OFF-state voltage: 0.8V or less

