

Silicon PNP Power Transistors

2SB600

DESCRIPTION

- With TO-3 package
- High power dissipations
- Complement to type 2SD555

APPLICATIONS

- For use in audio and power amplifier applications

PINNING(see Fig.2)

| PIN | DESCRIPTION |
|-----|-------------|
| 1 | Base |
| 2 | Emitter |
| 3 | Collector |

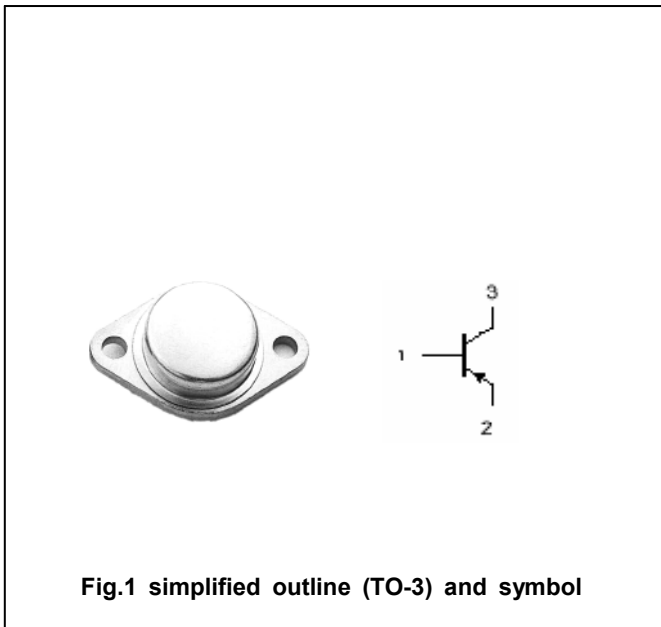


Fig.1 simplified outline (TO-3) and symbol

Absolute maximum ratings(Ta=□)

| SYMBOL | PARAMETER | CONDITIONS | VALUE | UNIT |
|-----------|-----------------------------|----------------|---------|------|
| V_{CBO} | Collector-base voltage | Open emitter | -200 | V |
| V_{CEO} | Collector-emitter voltage | Open base | -200 | V |
| V_{EBO} | Emitter-base voltage | Open collector | -5 | V |
| I_C | Collector current | | -10 | A |
| P_C | Collector power dissipation | $T_C=25□$ | 200 | W |
| T_j | Junction temperature | | 150 | □ |
| T_{stg} | Storage temperature | | -55~200 | □ |

Silicon PNP Power Transistors

2SB600

CHARACTERISTICS

T_j=25°C unless otherwise specified

| SYMBOL | PARAMETER | CONDITIONS | MIN | TYP. | MAX | UNIT |
|----------------------|--------------------------------------|---|------|------|------|------|
| V _{(BR)CEO} | Collector-emitter breakdown voltage | I _C =-25mA ; I _B =0 | -200 | | | V |
| V _{(BR)EBO} | Emitter-base breakdown voltage | I _E =-1mA ; I _C =0 | -5 | | | V |
| V _{CEsat} | Collector-emitter saturation voltage | I _C =-10A ; I _B =-1A | | | -1.5 | V |
| V _{BEsat} | Base-emitter saturation voltage | I _C =-10A ; I _B =-1A | | | -2.0 | V |
| I _{CBO} | Collector cut-off current | V _{CB} =-200V ; I _E =0 | | | -0.1 | mA |
| I _{EBO} | Emitter cut-off current | V _{EB} =-5V ; I _C =0 | | | -0.1 | mA |
| h _{FE} | DC current gain | I _C =-2A ; V _{CE} =-5V | 20 | | | |
| f _T | Transition frequency | I _C =-0.5A ; V _{CE} =-10V | 4 | | | MHz |

PACKAGE OUTLINE



Fig.2 outline dimensions (unindicated tolerance:±0.1mm)