

Silicon NPN Power Transistors

2SC3679

DESCRIPTION

- With TO-3PN package
- High voltage switching transistor

APPLICATIONS

- For switching regulator and general purpose applications

PINNING

PIN	DESCRIPTION
1	Base
2	Collector;connected to mounting base
3	Emitter

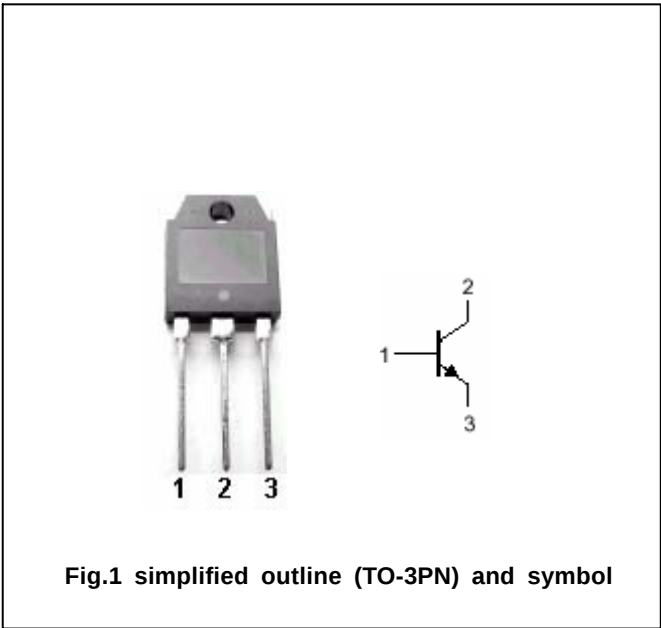


Fig.1 simplified outline (TO-3PN) and symbol

Absolute maximum ratings (Ta=25)

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
V _{CBO}	Collector-base voltage	Open emitter	900	V
V _{CEO}	Collector-emitter voltage	Open base	800	V
V _{EBO}	Emitter-base voltage	Open collector	7	V
I _C	Collector current (DC)		5	A
I _{CM}	Collector current -peak		10	A
I _B	Base current (DC)		2.5	A
P _C	Collector power dissipation	T _C =25	100	W
T _j	Junction temperature		150	
T _{stg}	Storage temperature		-55~150	

Silicon NPN Power Transistors

2SC3679

CHARACTERISTICS

Tj=25 unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{(BR)CEO}$	Collector-emitter breakdown voltage	$I_C=10mA$; $I_B=0$	800			V
V_{CEsat}	Collector-emitter saturation voltage	$I_C=2A$; $I_B=0.4A$			0.5	V
V_{BEsat}	Base-emitter saturation voltage	$I_C=2A$; $I_B=0.4A$			1.2	V
I_{CBO}	Collector cut-off current	$V_{CB}=800V$; $I_E=0$			0.1	mA
I_{EBO}	Emitter cut-off current	$V_{EB}=7V$; $I_C=0$			0.1	mA
h_{FE}	DC current gain	$I_C=2A$; $V_{CE}=4V$	10		30	
f_T	Transition frequency	$I_C=0.5A$; $V_{CE}=12V$		6		MHz
C_{OB}	Collector output capacitance	$f=1MHz$; $V_{CB}=10V$		75		pF


Switching times

t_{on}	Turn-on time	$I_C=2.0A$ $I_{B1}=0.3A$, $I_{B2}=-1A$ $V_{CC}=250V$, $R_L=125\Omega$			1.0	μs
t_s	Storage time				5.0	μs
t_f	Fall time				1.0	μs

Silicon NPN Power Transistors

2SC3679

PACKAGE OUTLINE

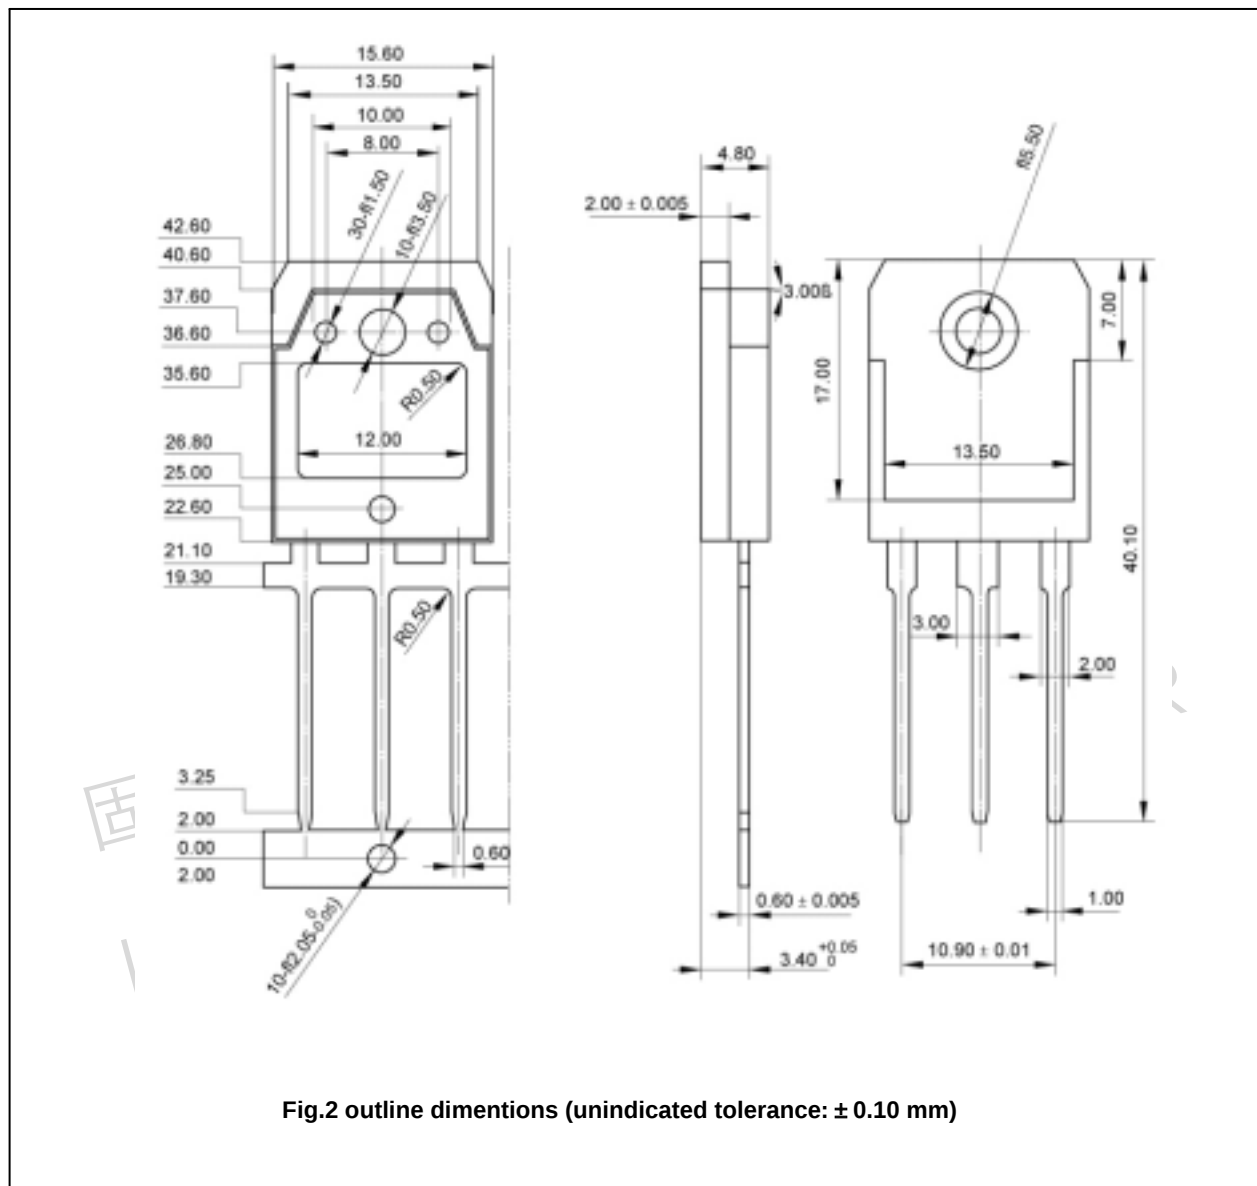

Silicon NPN Power Transistors

2SC3679

