

NEC

NPN SILICON TRANSISTOR

2SC1941

DESCRIPTION The 2SC1941 is designed for use in driver stages of audio frequency amplifiers.

- FEATURES**
- High total power dissipation and high breakdown voltage:
1.0 W at 25 °C ambient temperature/ $V_{CE0}=160$ V
 - Complementary to the NEC 2SA916 PNP transistor.

ABSOLUTE MAXIMUM RATINGS

Maximum Temperatures

Storage Temperature -55 to +150 °C

Junction Temperature +150 °C Maximum

Maximum Power Dissipation ($T_a = 25$ °C)

Total Power Dissipation 1.0 W

Thermal Resistance(junction to Ambient) ...125 °C/W

Maximum Voltages and Currents ($T_a = 25$ °C)

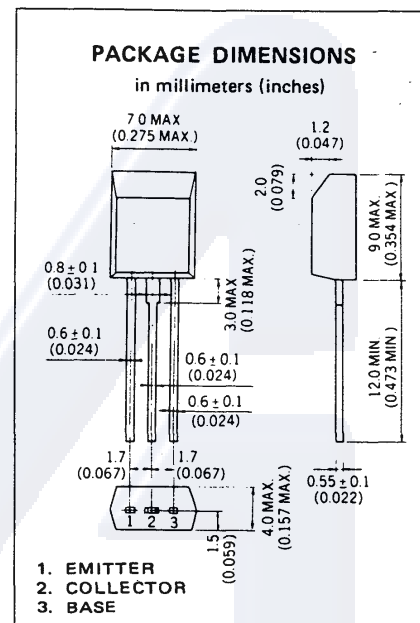
V_{CBO} Collector to Base Voltage 160 V

V_{CEO} Collector to Emitter Voltage 160 V

V_{EBO} Emitter to Base Voltage 5.0 V

I_C Collector Current 50 mA

I_B Base Current 10 mA



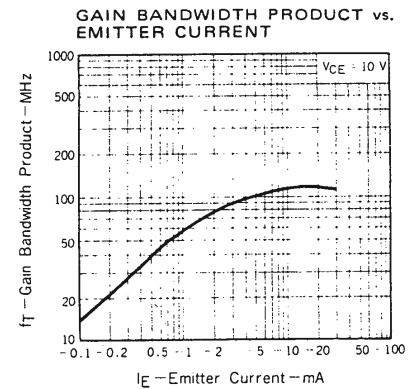
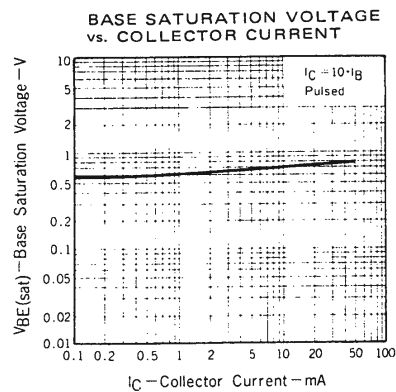
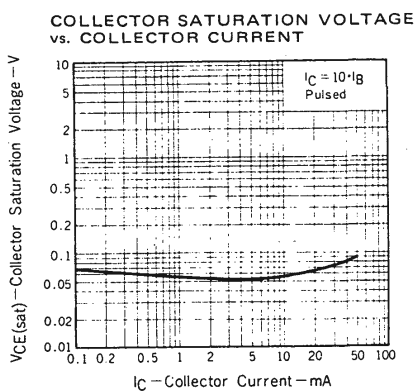
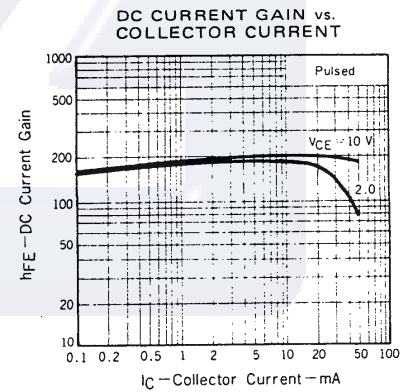
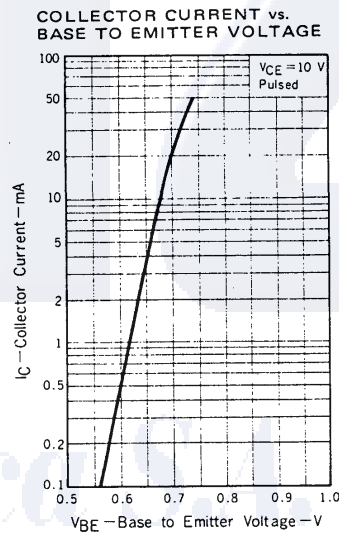
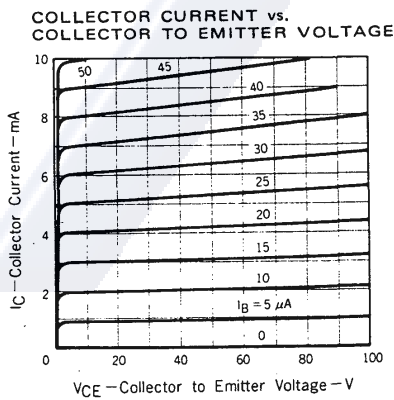
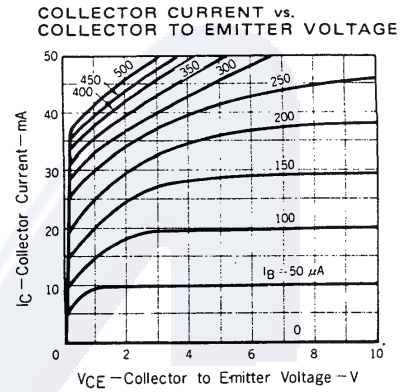
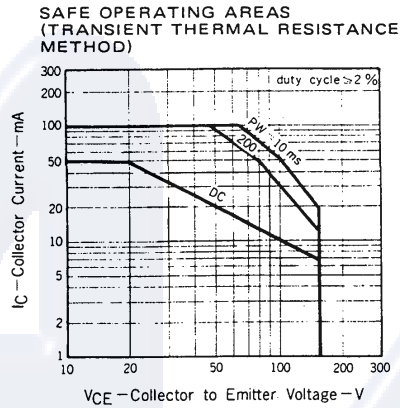
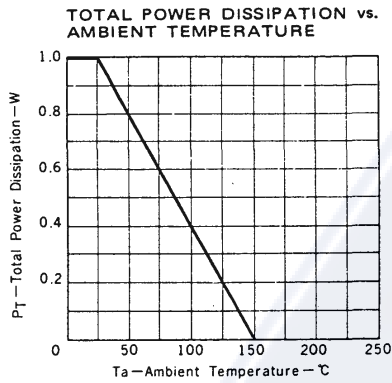
ELECTRICAL CHARACTERISTICS ($T_a = 25$ °C)

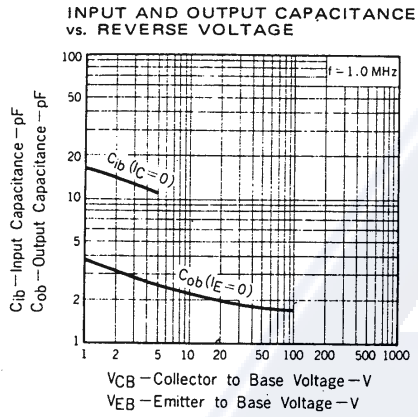
SYMBOL	CHARACTERISTIC	MIN.	TYP.	MAX.	UNIT	TEST CONDITIONS
h_{FE1}	DC Current Gain	90	200	400	—	$V_{CE} = 10$ V, $I_C = 10$ mA
h_{FE2}	DC Current Gain	50	180	—	—	$V_{CE} = 10$ V, $I_C = 1.0$ mA
f_T	Gain Bandwidth Product	50	120	—	MHz	$V_{CE} = 10$ V, $I_E = -10$ mA
C_{ob}	Output Capacitance	—	2.3	3.0	pF	$V_{CB} = 10$ V, $I_E = 0$, $f = 1.0$ MHz
I_{CBO}	Collector Cutoff Current	—	—	100	nA	$V_{CB} = 160$ V, $I_E = 0$
I_{EBO}	Emitter Cutoff Current	—	—	100	nA	$V_{EB} = 5.0$ V, $I_C = 0$
V_{BE}	Base to Emitter Voltage	650	685	750	mV	$V_{CE} = 10$ V, $I_C = 10$ mA
$V_{CE(sat)}$	Collector Saturation Voltage	—	0.07	0.6	V	$I_C = 20$ mA, $I_B = 2.0$ mA
$V_{BE(sat)}$	Base Saturation Voltage	—	0.75	1.0	V	$I_C = 20$ mA, $I_B = 2.0$ mA

Classification of h_{FE1}

Rank	M	L	K
Range	90 — 180	135 — 270	200 — 400

h_{FE1} Test Conditions: $V_{CE} = 10$ V, $I_C = 10$ mA

2SC1941**NEC****TYPICAL CHARACTERISTICS ($T_a=25^\circ\text{C}$ unless otherwise noted)**

NEC**2SC1941**

Electrónica S.A. de C.V.