



# 2SC3281


# NPN PLANAR SILICON TRANSISTOR

## AUDIO POWER AMPLIFIER DC TO DC CONVERTER

- High Current Capability
- High Power Dissipation
- Complementary to 2SA1302

### ABSOLUTE MAXIMUM RATING (Ta=25°C)

Characteristic	Symbol	Rating	Unit
Collector-Base Voltage	VCBO	200	V
Collector-Emitter Voltage	VCEO	200	V
Emitter-Base voltage	VEBO	6	V
Collector Current (DC)	IC	15	A
Collector Dissipation	PC	150	W
Junction Temperature	Tj	150	°C
Storage Temperature	Tstg	-55~150	°C

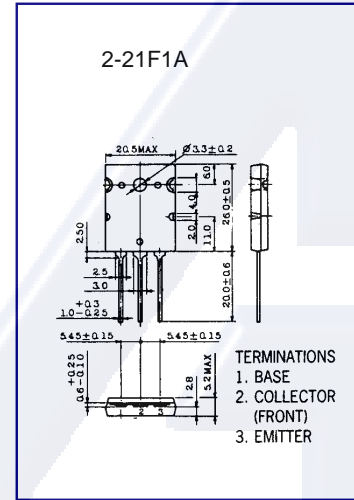

### ELECTRICAL CHARACTERISTICS (Ta=25°C)

Characteristic	Symbol	Test Condition	Min	Typ	Max	Unit
Collector Base Breakdown Voltage	BVCBO	IC=10 mA IE=0	200			V
Collector Emitter Breakdown Voltage	BVCEO	IC=5 mA RBE=∞	200			V
Emitter Base Breakdown Voltage	BVEBO	IE=4mA IC=0	6			V
Collector Cutoff Current	ICBO	VCB=100V IE=0			0.1	mA
Emitter Cutoff Current	IEBO	VEB=4V IC=0			0.1	mA
*DC Current Gain	hFE1	VCE=5V IC=1A	55		160	
DC Current Gain	hFE2	VCE=5V IC=5A	50			
Collector- Emitter Saturation Voltage	VCE(sat)	IC=10A IB=1A			3.0	V

Wing Shing Computer Components Co., (H.K.)Ltd.  
Homepage: <http://www.wingshing.com>

Tel:(852)2341 9276 Fax:(852)2797 8153  
E-mail: wsccltd@hkstar.com

This datasheet has been download from:

[www.datasheetcatalog.com](http://www.datasheetcatalog.com)

Datasheets for electronics components.

**AG**

*Electrónica S.A. de C.V.*