

Silicon NPN Power Transistors

2SC3387

DESCRIPTION


- With TO-3PN package
- High breakdown voltage
- Fast switching speed

APPLICATIONS

- For horizontal deflection output applications

PINNING

PIN	DESCRIPTION
1	Base
2	Collector,connected to mounting base
3	Emitter

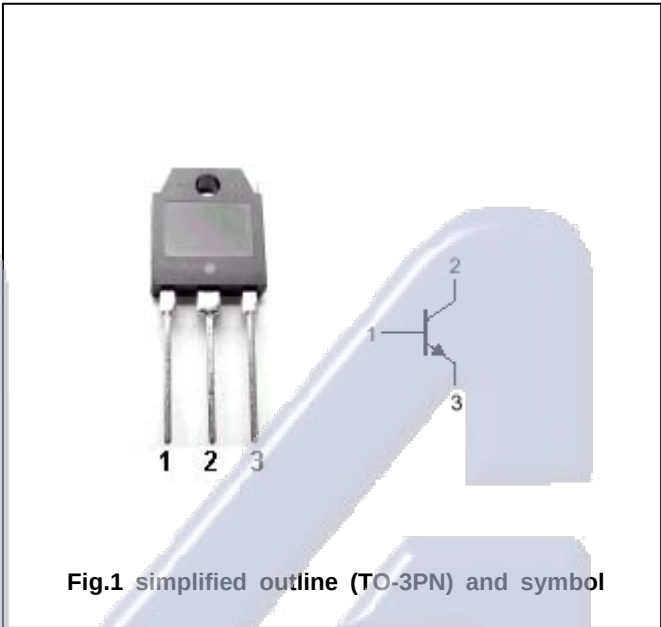

Absolute maximum ratings(Ta=℃)

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
V _{CBO}	Collector-base voltage	Open emitter	1200	V
V _{CEO}	Collector-emitter voltage	Open base	500	V
V _{EBO}	Emitter-base voltage	Open collector	6	V
I _C	Collector current		5	A
I _{CM}	Collector current-peak		10	A
P _C	Collector power dissipation	T _C =25℃	50	W
T _j	Junction temperature		150	℃
T _{stg}	Storage temperature		-55~150	℃

Inchange Semiconductor

Product Specification

Silicon NPN Power Transistors

2SC3387

CHARACTERISTICS

Tj=25°C unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
V _{CEO(SUS)}	Collector-emitter sustaining voltage	I _C =100mA ; I _B =0	500			V
V _{(BR)EBO}	Emitter-base breakdown voltage	I _E =1mA ; I _C =0	6			V
V _{CEsat}	Collector-emitter saturation voltage	I _C =4A ; I _B =0.8A			5.0	V
V _{BEsat}	Base-emitter saturation voltage	I _C =4A ; I _B =0.8A			1.5	V
I _{CBO}	Collector cut-off current	V _{CB} =800V ; I _E =0			10	μ A
I _{EBO}	Emitter cut-off current	V _{EB} =4V ; I _C =0			10	μ A
h _{FE}	DC current gain	I _C =0.3A ; V _{CE} =5V	15			

Electrónica S.A. de C.V.

2SC3387

[illegible]