

SHINDENGEN

Switching Power Transistor


FS Series

2SC4663

(TP5V20FS)

5A NPN

OUTLINE DIMENSIONS

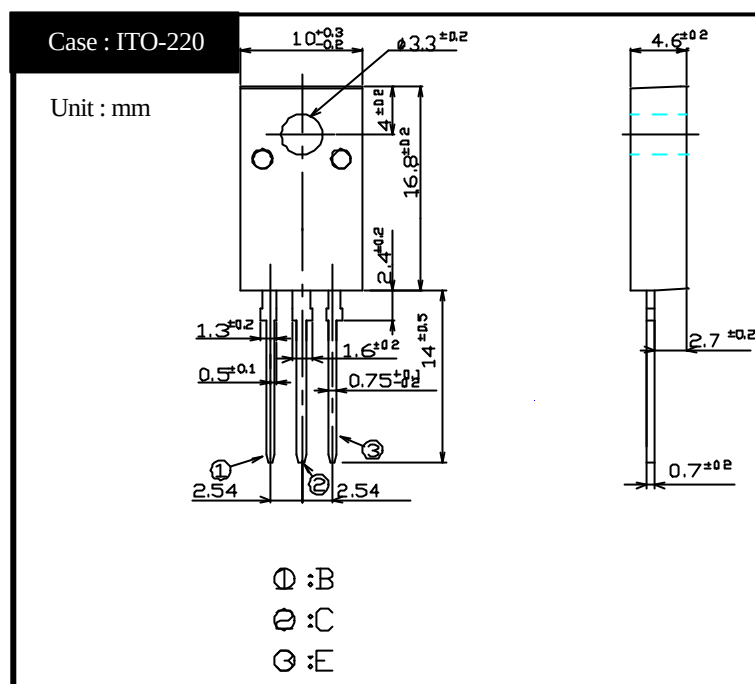

RATINGS


● Absolute Maximum Ratings

Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	T _{stg}		-55~150	°C
Junction Temperature	T _j		150	°C
Collector to Base Voltage	V _{CBO}		250	V
Collector to Emitter Voltage	V _{CEO}		200	V
Emitter to Base Voltage	V _{EBO}		7	V
Collector Current DC	I _C		5	A
Collector Current Peak	I _{CP}		10	A
Base Current DC	I _B		2	A
Base Current Peak	I _{BP}		4	A
Total Transistor Dissipation	P _T	T _c = 25°C	25	W
Dielectric Strength	V _{dis}	Terminals to case, AC 1 minute	2	kV
Mounting Torque	TOR	(Recommended torque : 0.3N·m)	0.5	N·m


● Electrical Characteristics (T_c=25°C)

Item	Symbol	Conditions	Ratings	Unit
Collector to Emitter Sustaining Voltage	V _{CEO(sus)}	I _C = 0.1A	Min 200	V
Collector Cutoff Current	I _{CBO}	At rated Voltage	Max 0.1	mA
	I _{CEO}		Max 0.1	
Emitter Cutoff Current	I _{EBO}	At rated Voltage	Max 0.1	mA
DC Current Gain	h _{FE}	V _{CE} = 2V, I _C = 2.5A	10~25 ^{*1}	
	h _{FEL}	V _{CE} = 2V, I _C = 1mA	Min 10	
Collector to Emitter Saturation Voltage	V _{CE(sat)}	I _C = 2.5A	Max 1.0	V
Base to Emitter Saturation Voltage	V _{BE(sat)}	I _B = 0.5A	Max 1.5	V
Thermal Resistance	θ _{jc}	Junction to case	Max 5.0	°C/W
Transition Frequency	f _T	V _{CE} = 10V, I _C = 0.5A	TYP 13	MHz
Turn on Time	ton	I _C = 2.5A	Max 0.3	μs
Storage Time	ts	I _{B1} = 0.5A, I _{B2} = 1A	Max 1.0	
Fall Time	tf	R _L = 60Ω, V _{BB2} = 4V	Max 0.1	


2SC4663 $h_{FE} - I_C$

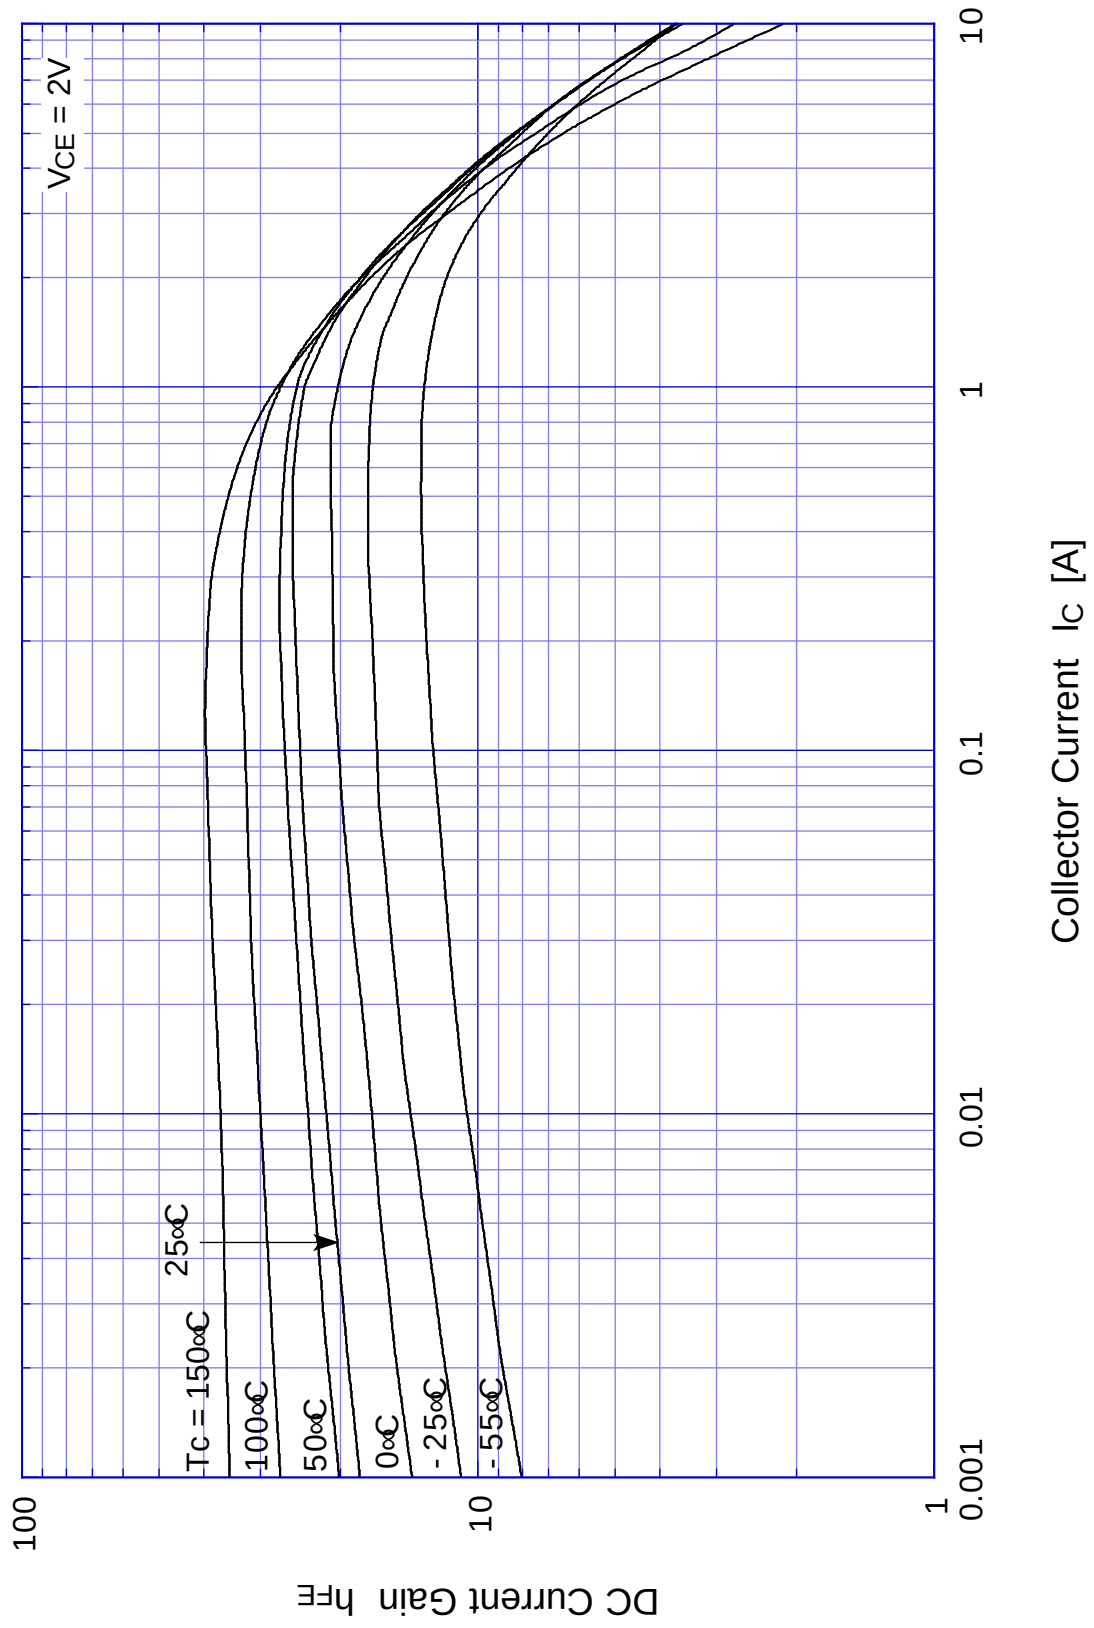


2SC4663 Saturation Voltage

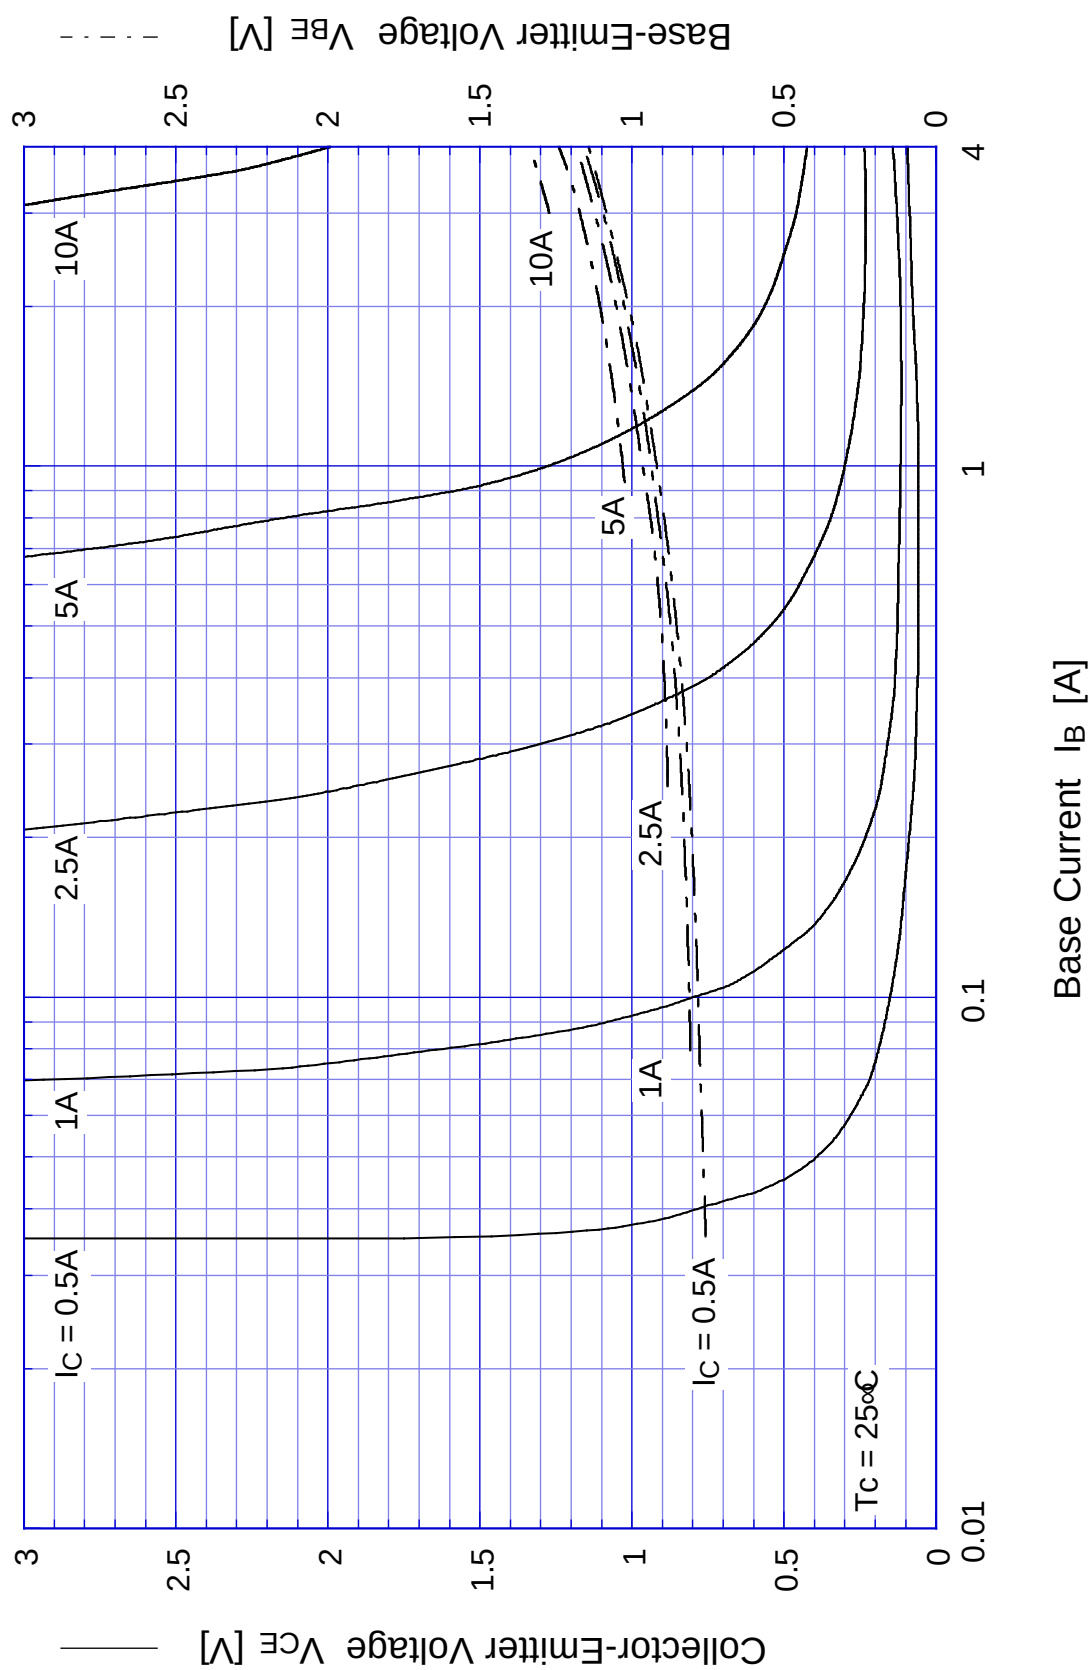


2SC4663

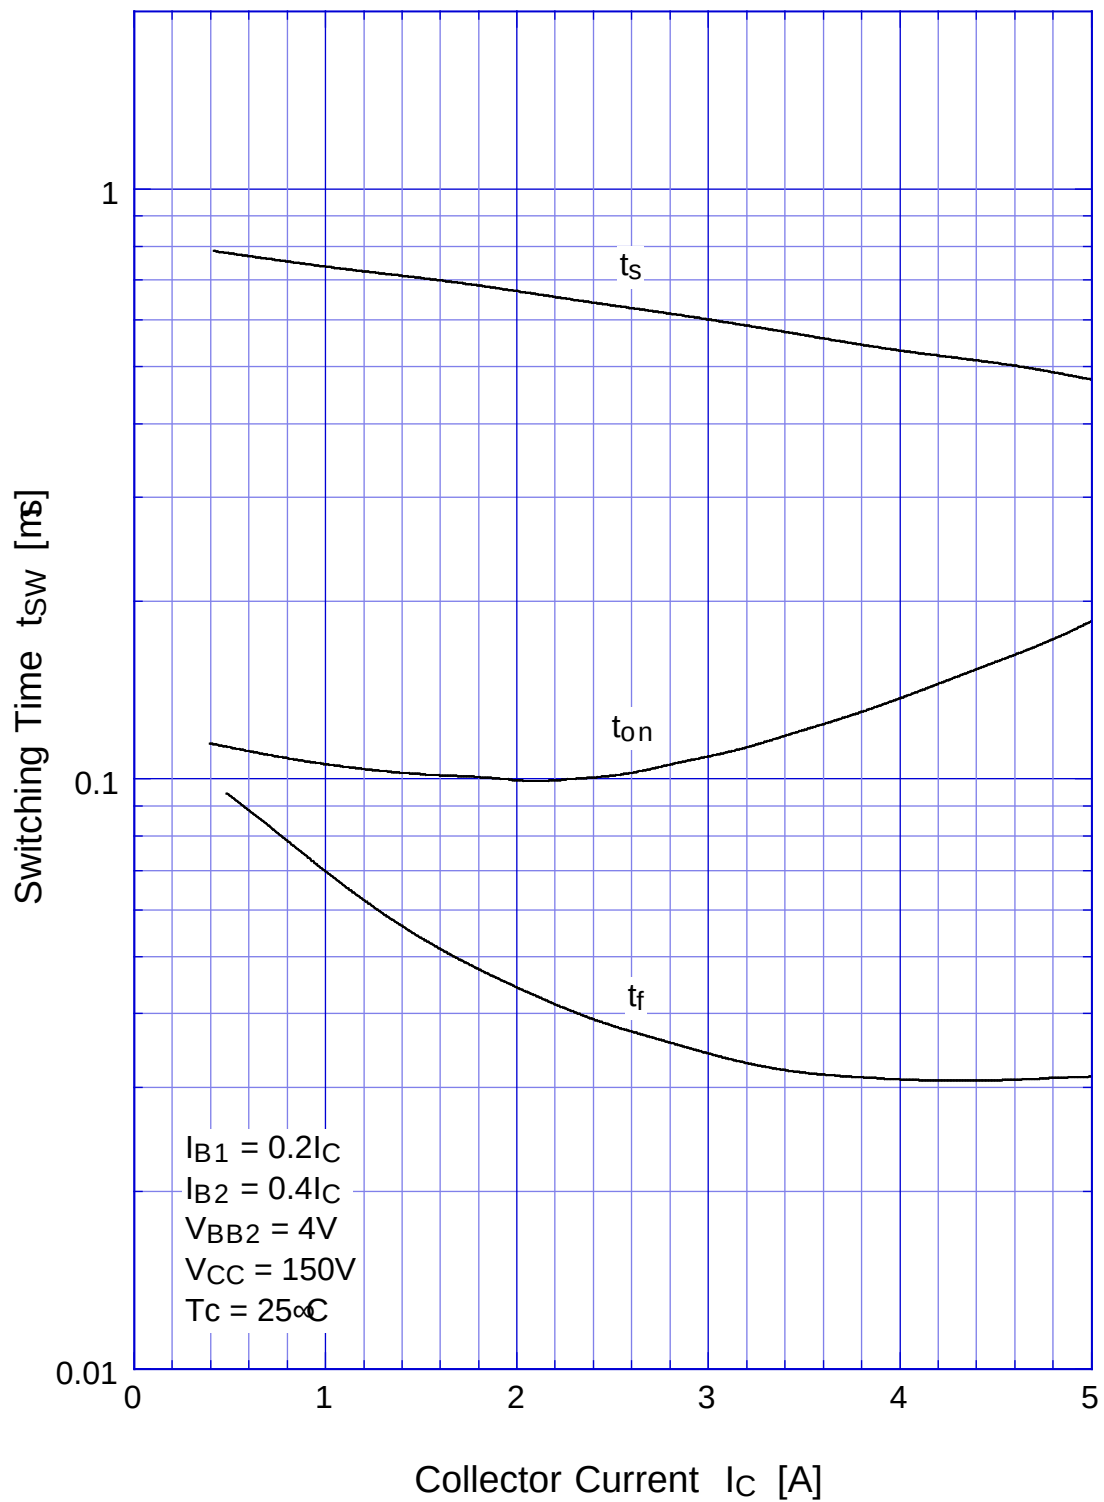
Switching Time - I_C 


2SC4663

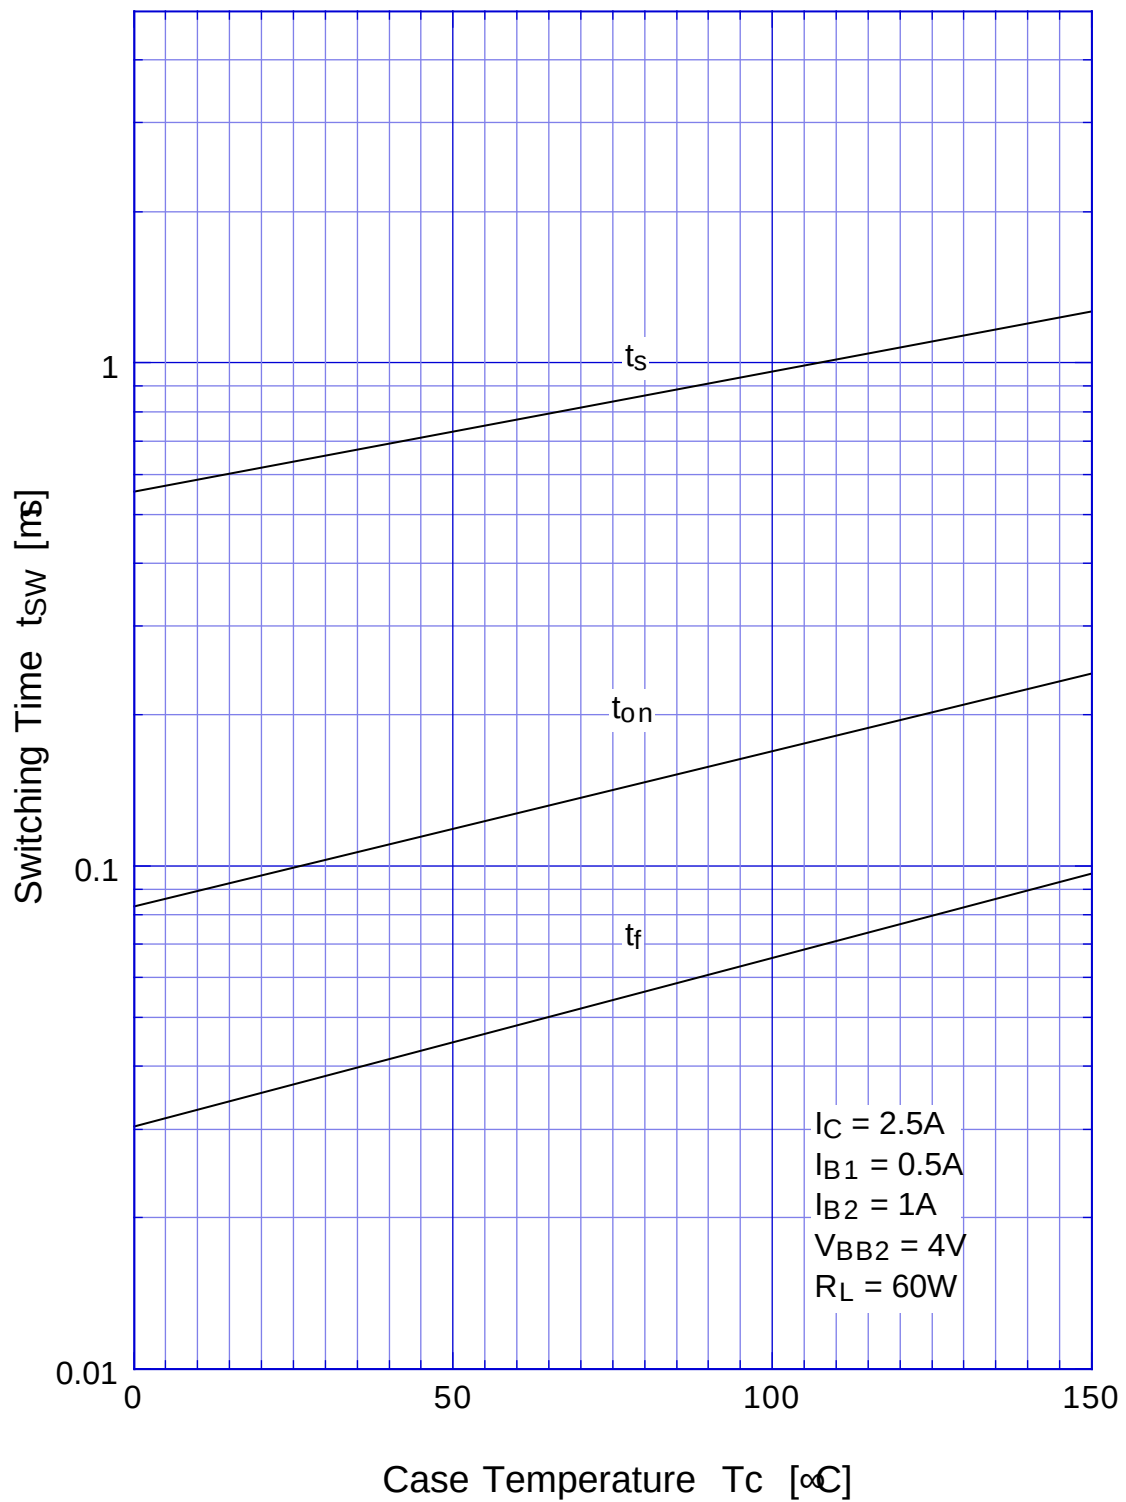Switching Time - T_c 

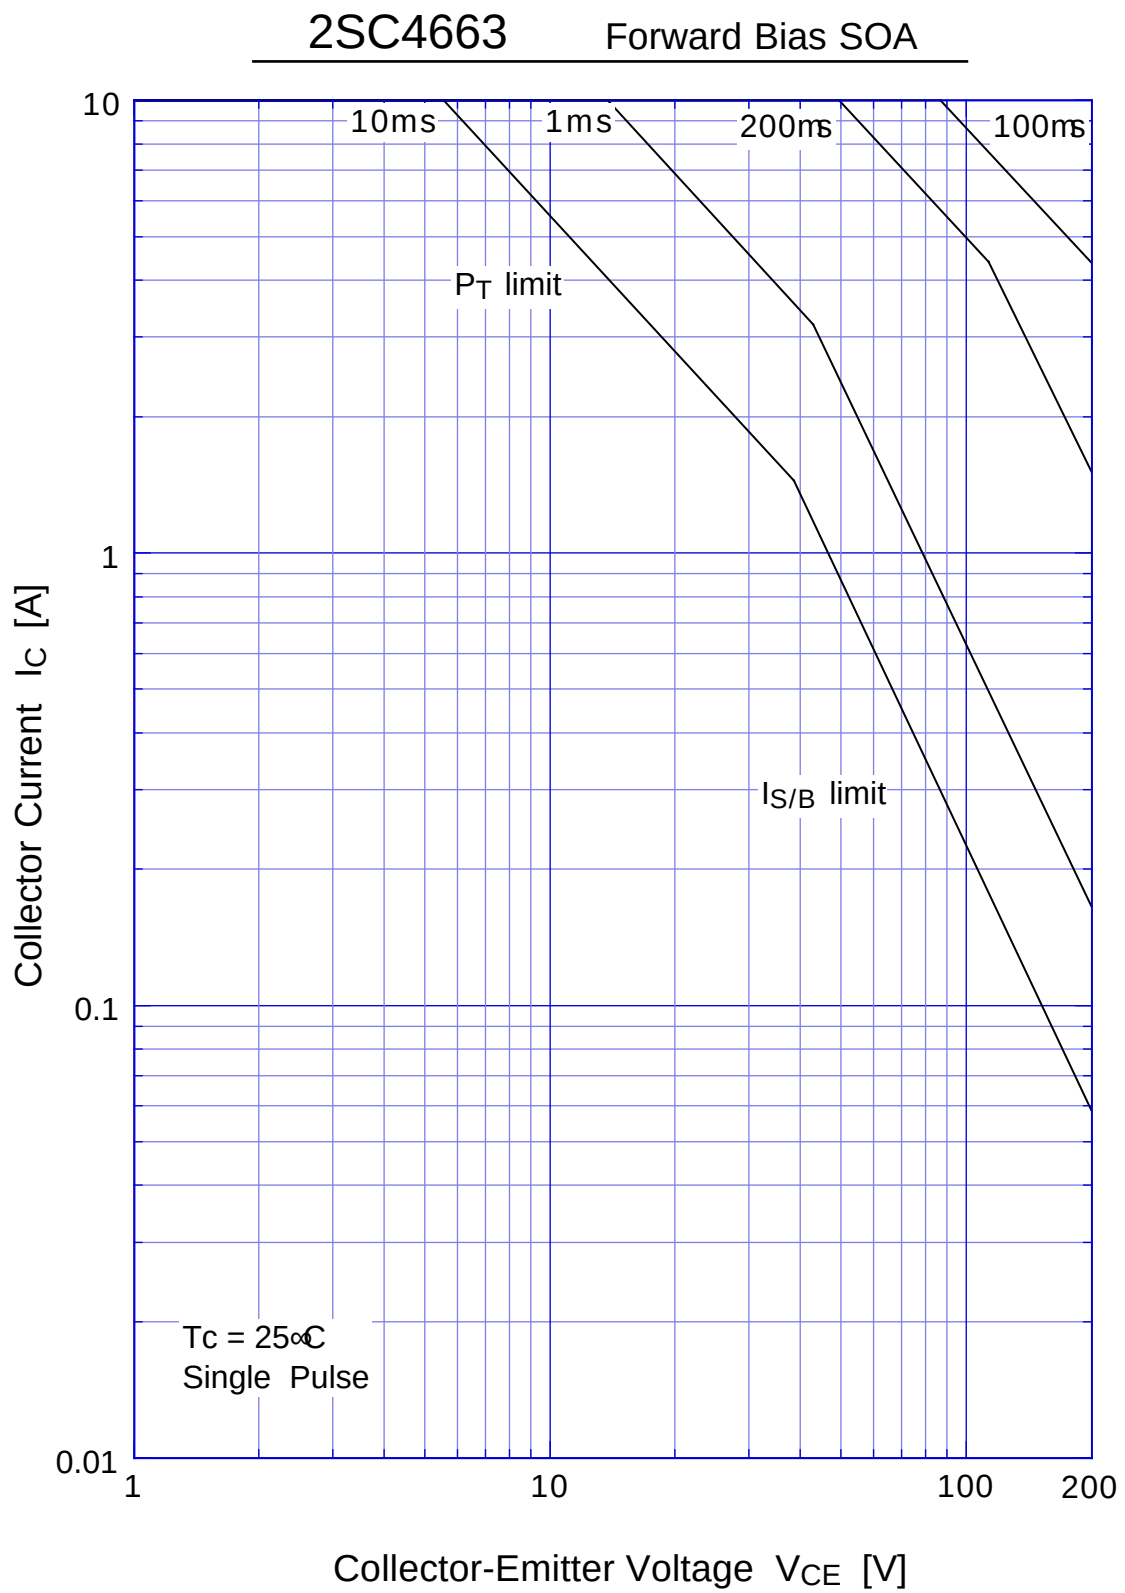

2SC4663 Collector Current Derating

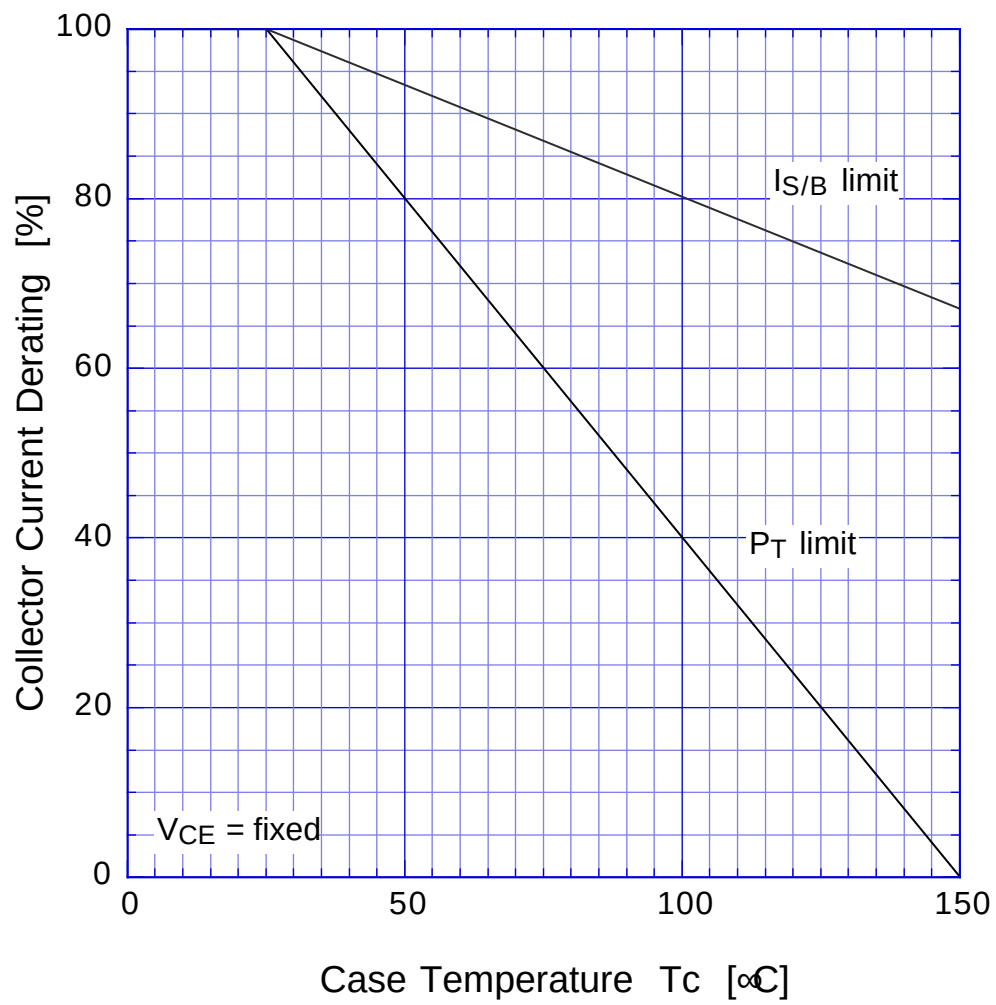

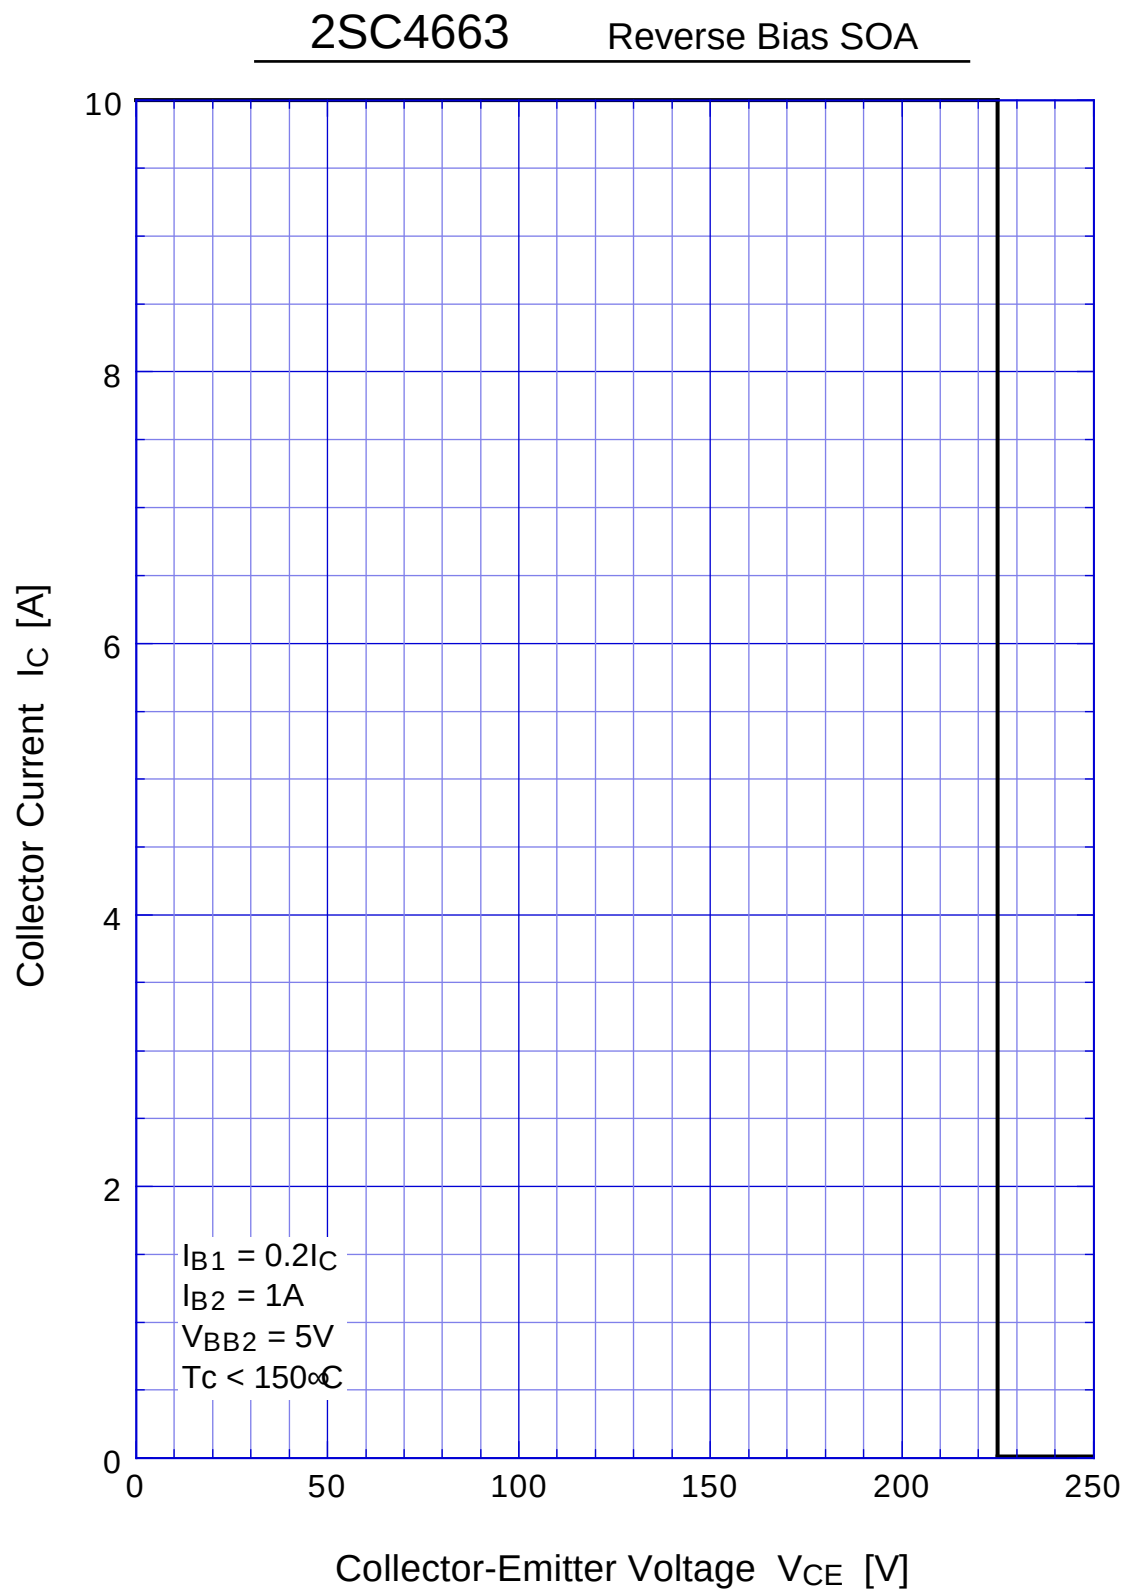

2SC4663 Transient Thermal Impedance

