



**2SD1555** **NPN TRIPLE DIFFUSED**  
**PLANAR SILICON TRANSISTOR**


## COLOR TV HORIZONTAL OUTPUT

## APPLICATIONS(Damper Diode BUILT IN)

- High Collector-Base Voltage( $V_{CBO}=1500V$ )
- High Speed Switching

### ABSOLUTE MAXIMUM RATINGS (T<sub>A</sub>=25°C)

| Characteristic                               | Symbol           | Rating  | Unit |
|----------------------------------------------|------------------|---------|------|
| Collector-Base Voltage                       | V <sub>CB0</sub> | 1500    | V    |
| Collector-Emitter Voltage                    | V <sub>CE0</sub> | 1500    | V    |
| Emitter-Base voltage                         | V <sub>EB0</sub> | 6       | V    |
| Collector Current (DC)                       | I <sub>C</sub>   | 5       | A    |
| Collector Dissipation (T <sub>c</sub> =25°C) | P <sub>C</sub>   | 50      | W    |
| Junction Temperature                         | T <sub>j</sub>   | 150     | °C   |
| Storage Temperature                          | T <sub>stg</sub> | -50~150 | °C   |

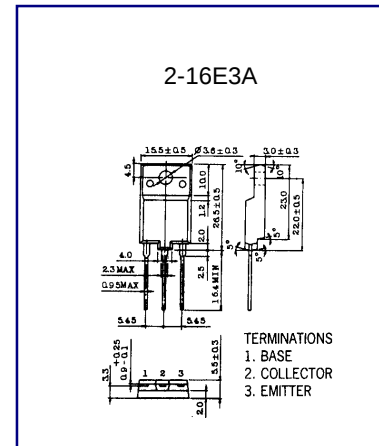

### ELECTRICAL CHARACTERISTICS (T<sub>A</sub>=25°C)

| Characteristic                                  | Symbol        | Test Condition                                                                        | Min | Typ | Max | Unit          |
|-------------------------------------------------|---------------|---------------------------------------------------------------------------------------|-----|-----|-----|---------------|
| Collector- Emitter Cutoff Current( $V_{BE}=0$ ) | $I_{CES}$     | $V_{CE}=1400\text{ V}$ ,                                                              | 8   |     | 1.0 | mA            |
| Collector Cutoff Current                        | $I_{CBO}$     | $R_{BE}=0$                                                                            |     |     | 10  | $\mu\text{A}$ |
| Emitter Cutoff Current                          | $I_{EBO}$     | $V_{CB}=800\text{ V}$ , $I_E=0$                                                       |     |     | 1.0 | mA            |
| DC Current Gain                                 | $h_{FE}$      | $V_{EB}=4\text{ V}$ , $I_C=0$                                                         |     |     |     |               |
| Collector- Emitter Saturation Voltage           | $V_{CE(sat)}$ | $V_{CE}=5\text{ V}$ ,<br>$I_C=1\text{ A}$ ,<br>$I_C=5\text{ A}$ ,<br>$I_B=1\text{ A}$ |     |     | 5.0 | V             |

Wing Shing Computer Components Co., (H.K.)Ltd.  
Homepage: <http://www.wingshing.com>

Tel:(852)2341 9276 Fax:(852)2797 8153  
E-mail: [wsccltd@hkstar.com](mailto:wsccltd@hkstar.com)