

N-Channel MOSFET Transistor

2SK956

DESCRIPTION


- Drain Current $-I_D=9A@ T_C=25^{\circ}C$
- Drain Source Voltage-
: $V_{DSS}=800V(\text{Min})$
- Fast Switching Speed

APPLICATIONS

- Designed especially for high voltage,high speed applications, such as off-line switching power supplies , UPS,AC and DC motor controls,relay and solenoid drivers.

ABSOLUTE MAXIMUM RATINGS($T_a=25^{\circ}C$)

SYMBOL	ARAMETER	VALUE	UNIT
V_{DSS}	Drain-Source Voltage ($V_{GS}=0$)	800	V
V_{GS}	Gate-Source Voltage	± 30	V
I_D	Drain Current-continuous@ $TC=25^{\circ}C$	9	A
P_{tot}	Total Dissipation@ $TC=25^{\circ}C$	150	W
T_j	Max. Operating Junction Temperature	80	$^{\circ}C$
T_{stg}	Storage Temperature Range	-55~150	$^{\circ}C$

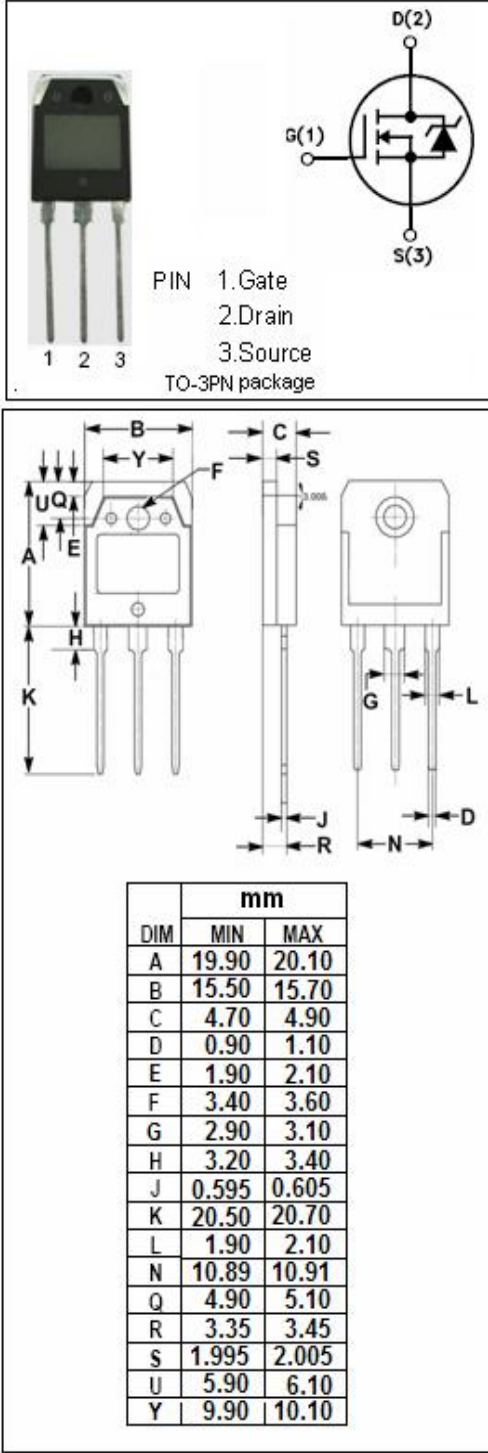

N-Channel Mosfet Transistor

2SK956

• ELECTRICAL CHARACTERISTICS (T_C=25°C)

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
(BR)DSS	Drain-Source Breakdown Voltage	V _{GS} =0; I _D = 1mA	800			V
V _{GS(TH)}	Gate Threshold Voltage	V _{DS} = V _{GS} ; I _D = 1mA	2.5	3.5	5.0	V
R _{DS(ON)}	Drain-Source On-stage Resistance	V _{GS} = 10V; I _D =4A		1.0	1.5	Ω
I _{GSS}	Gate Source Leakage Current	V _{GS} = ±30V; V _{DS} = 0			±100	nA
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} =800V; V _{GS} = 0			500	uA
ton	Turn-on time	V _{GS} =10V; I _D =9A; R _L =25 Ω		280	425	ns
toff	Turn-off time			460	690	ns
V _{SD}	Diode Forward Voltage	I _F =9A; V _{GS} =0		1.05	1.58	V