


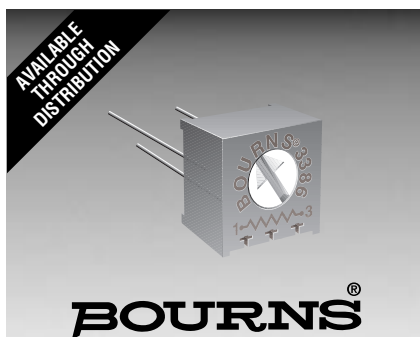

Features

- Single Turn / Cermet / Industrial / Sealed
- Available on tape and reel (see page 71 for details)
- Available with a knob for finger adjust
- Available with extended shaft
- Available with cross-slot rotor

- Top and side adjust types (F, P, H, W, X most popular)
- High voltage types available (see page 61 for details)

3386 - 3/8" Square Trimming Potentiometer

Electrical Characteristics

Standard Resistance Range10 to 2 megohms
(see standard resistance table)

Resistance Tolerance±10% std.
(tighter tolerance available)

Absolute Minimum Resistance2 ohms max.

Contact Resistance Variation2% or 3 ohms max.
(whichever is greater)

Adjustability

Voltage±0.05%

Resistance±0.15%

Resolution.....Infinite

Insulation Resistance500 vdc.
1,000 megohms min.

Dielectric Strength

Sea Level900 vac

70,000 Feet.....350 vac

Adjustment Angle280° nom.

Environmental Characteristics

Power Rating (300 volts max.)

85°C0.5 watt

125°C0 watt

Temperature Range-55°C to +125°C

Temperature Coefficient±100ppm/°C

Seal Test85°C Fluorinert*

Humidity.....MIL-STD-202 Method 103
96 hours
(2% ΔTR, 10 Megohms min.)

Vibration.....30G (1% ΔTR; 1% ΔVR)

Shock.....100G (1% ΔTR; 1% ΔVR)

Load Life

.....1,000 hours 0.5 watt @ 70°C
(3% ΔTR; 1% or 1 ohm, whichever is greater, CRV)

Rotational Life200 cycles
(4% ΔTR; 1% or 1 ohm, whichever is greater, CRV)

Physical Characteristics

Mechanical Angle310° nom.

Torque5.0 oz-in. max.

Stop Strength15.0 oz -in. min.

TerminalsSolderable pins

Weight0.03 oz.

MarkingManufacturer's trademark, resistance code, wiring diagram, date code, manufacturer's model number and style

Standard Packaging

.....50 pcs. per tube


Wiper Positioned at 50% Nominal

Adjustment ToolH-90


*"FLUORINERT" IS A REGISTERED TRADEMARK OF 3M CO.

Specifications are subject to change without notice.


Common Dimensions Side Adjust

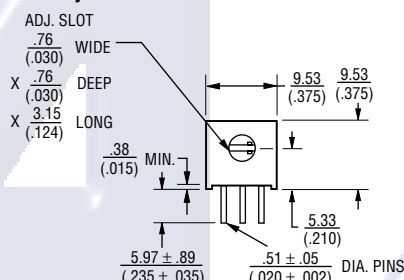


3386B




3386C




3386H




3386J




3386S



3386W



3386X



Standard Resistance Table

Resistance (Ohms)	Resistance Code
10	100
20	200
50	500
100	101
200	201
500	501
1,000	102
2,000	202
5,000	502
10,000	103
20,000	203
25,000	253
50,000	503
100,000	104
200,000	204
250,000	254
500,000	504
1,000,000	105
2,000,000	205

Special resistances available.

How To Order

3386 P - 1 - 103 T

Model _____

Style _____

Standard or Modified _____

Product Indicator

-1 = Standard Product

-EY5 = Extended Shaft

Resistance Code _____

Optional Suffix Letter _____

T = Knob

Consult factory for other available options.

TOLERANCES: ± 0.25 (.010) EXCEPT WHERE NOTED


DIMENSIONS ARE: $\frac{\text{METRIC}}{(\text{INCHES})}$

SHADED AREAS TYPICALLY NOT STOCKED BY DISTRIBUTORS AND NOT RECOMMENDED FOR NEW DESIGNS.


3386 - 3/8" Square Trimming Potentiometer

BOURNS®


Common Dimensions Top Adjust

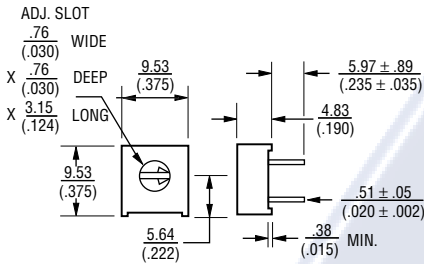


3386F




3386K





3386M




3386P




3386R




3386T




3386U




3386Y



3386G

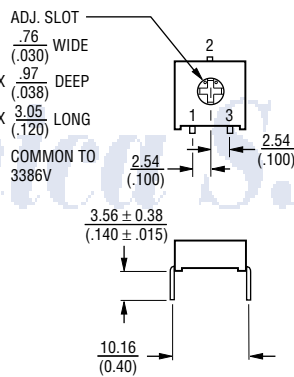


3386V

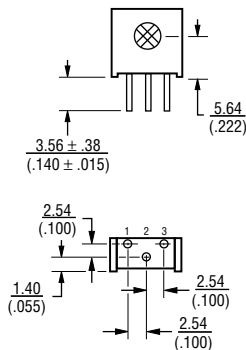


3386H-EY5


3386X-EY5 - SHOWN

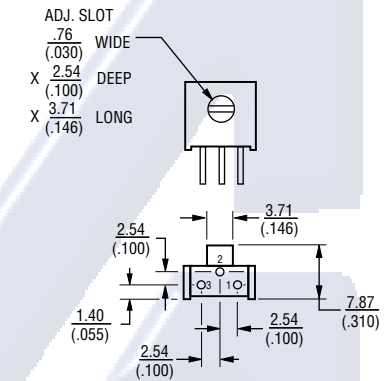

3386P-EY5



The Model 3386 is available with a knob for finger adjustment. Add suffix letter "T" to order code for F, P and X terminal styles.

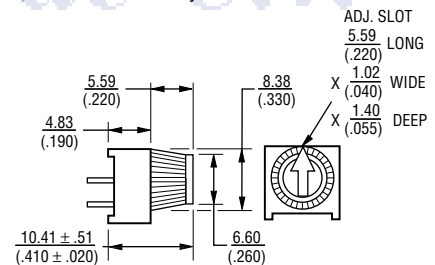

SHADED AREAS TYPICALLY NOT STOCKED BY DISTRIBUTORS AND NOT RECOMMENDED FOR NEW DESIGNS.

Specifications are subject to change without notice.