

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
A		REVISED PER ECO-19-003043	26FEB2019	SY	HL

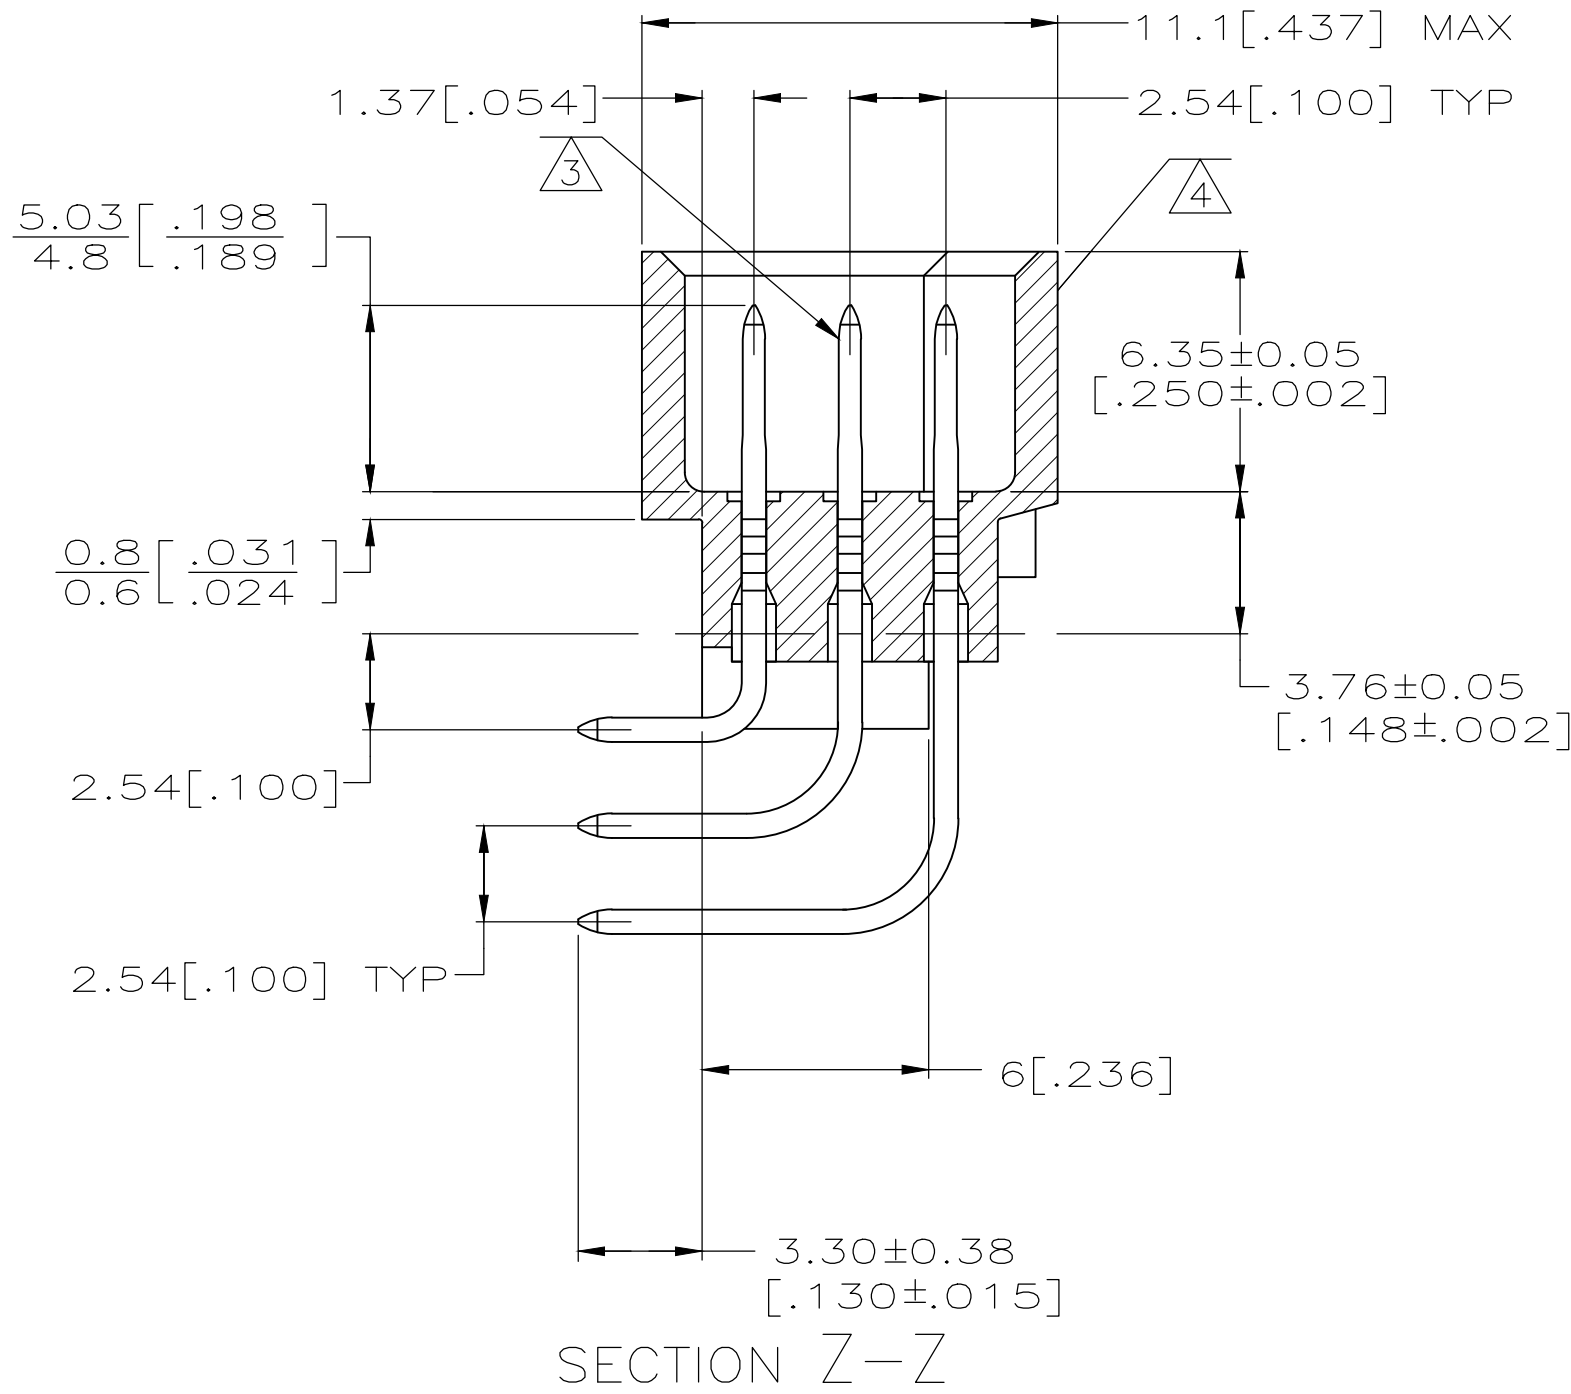
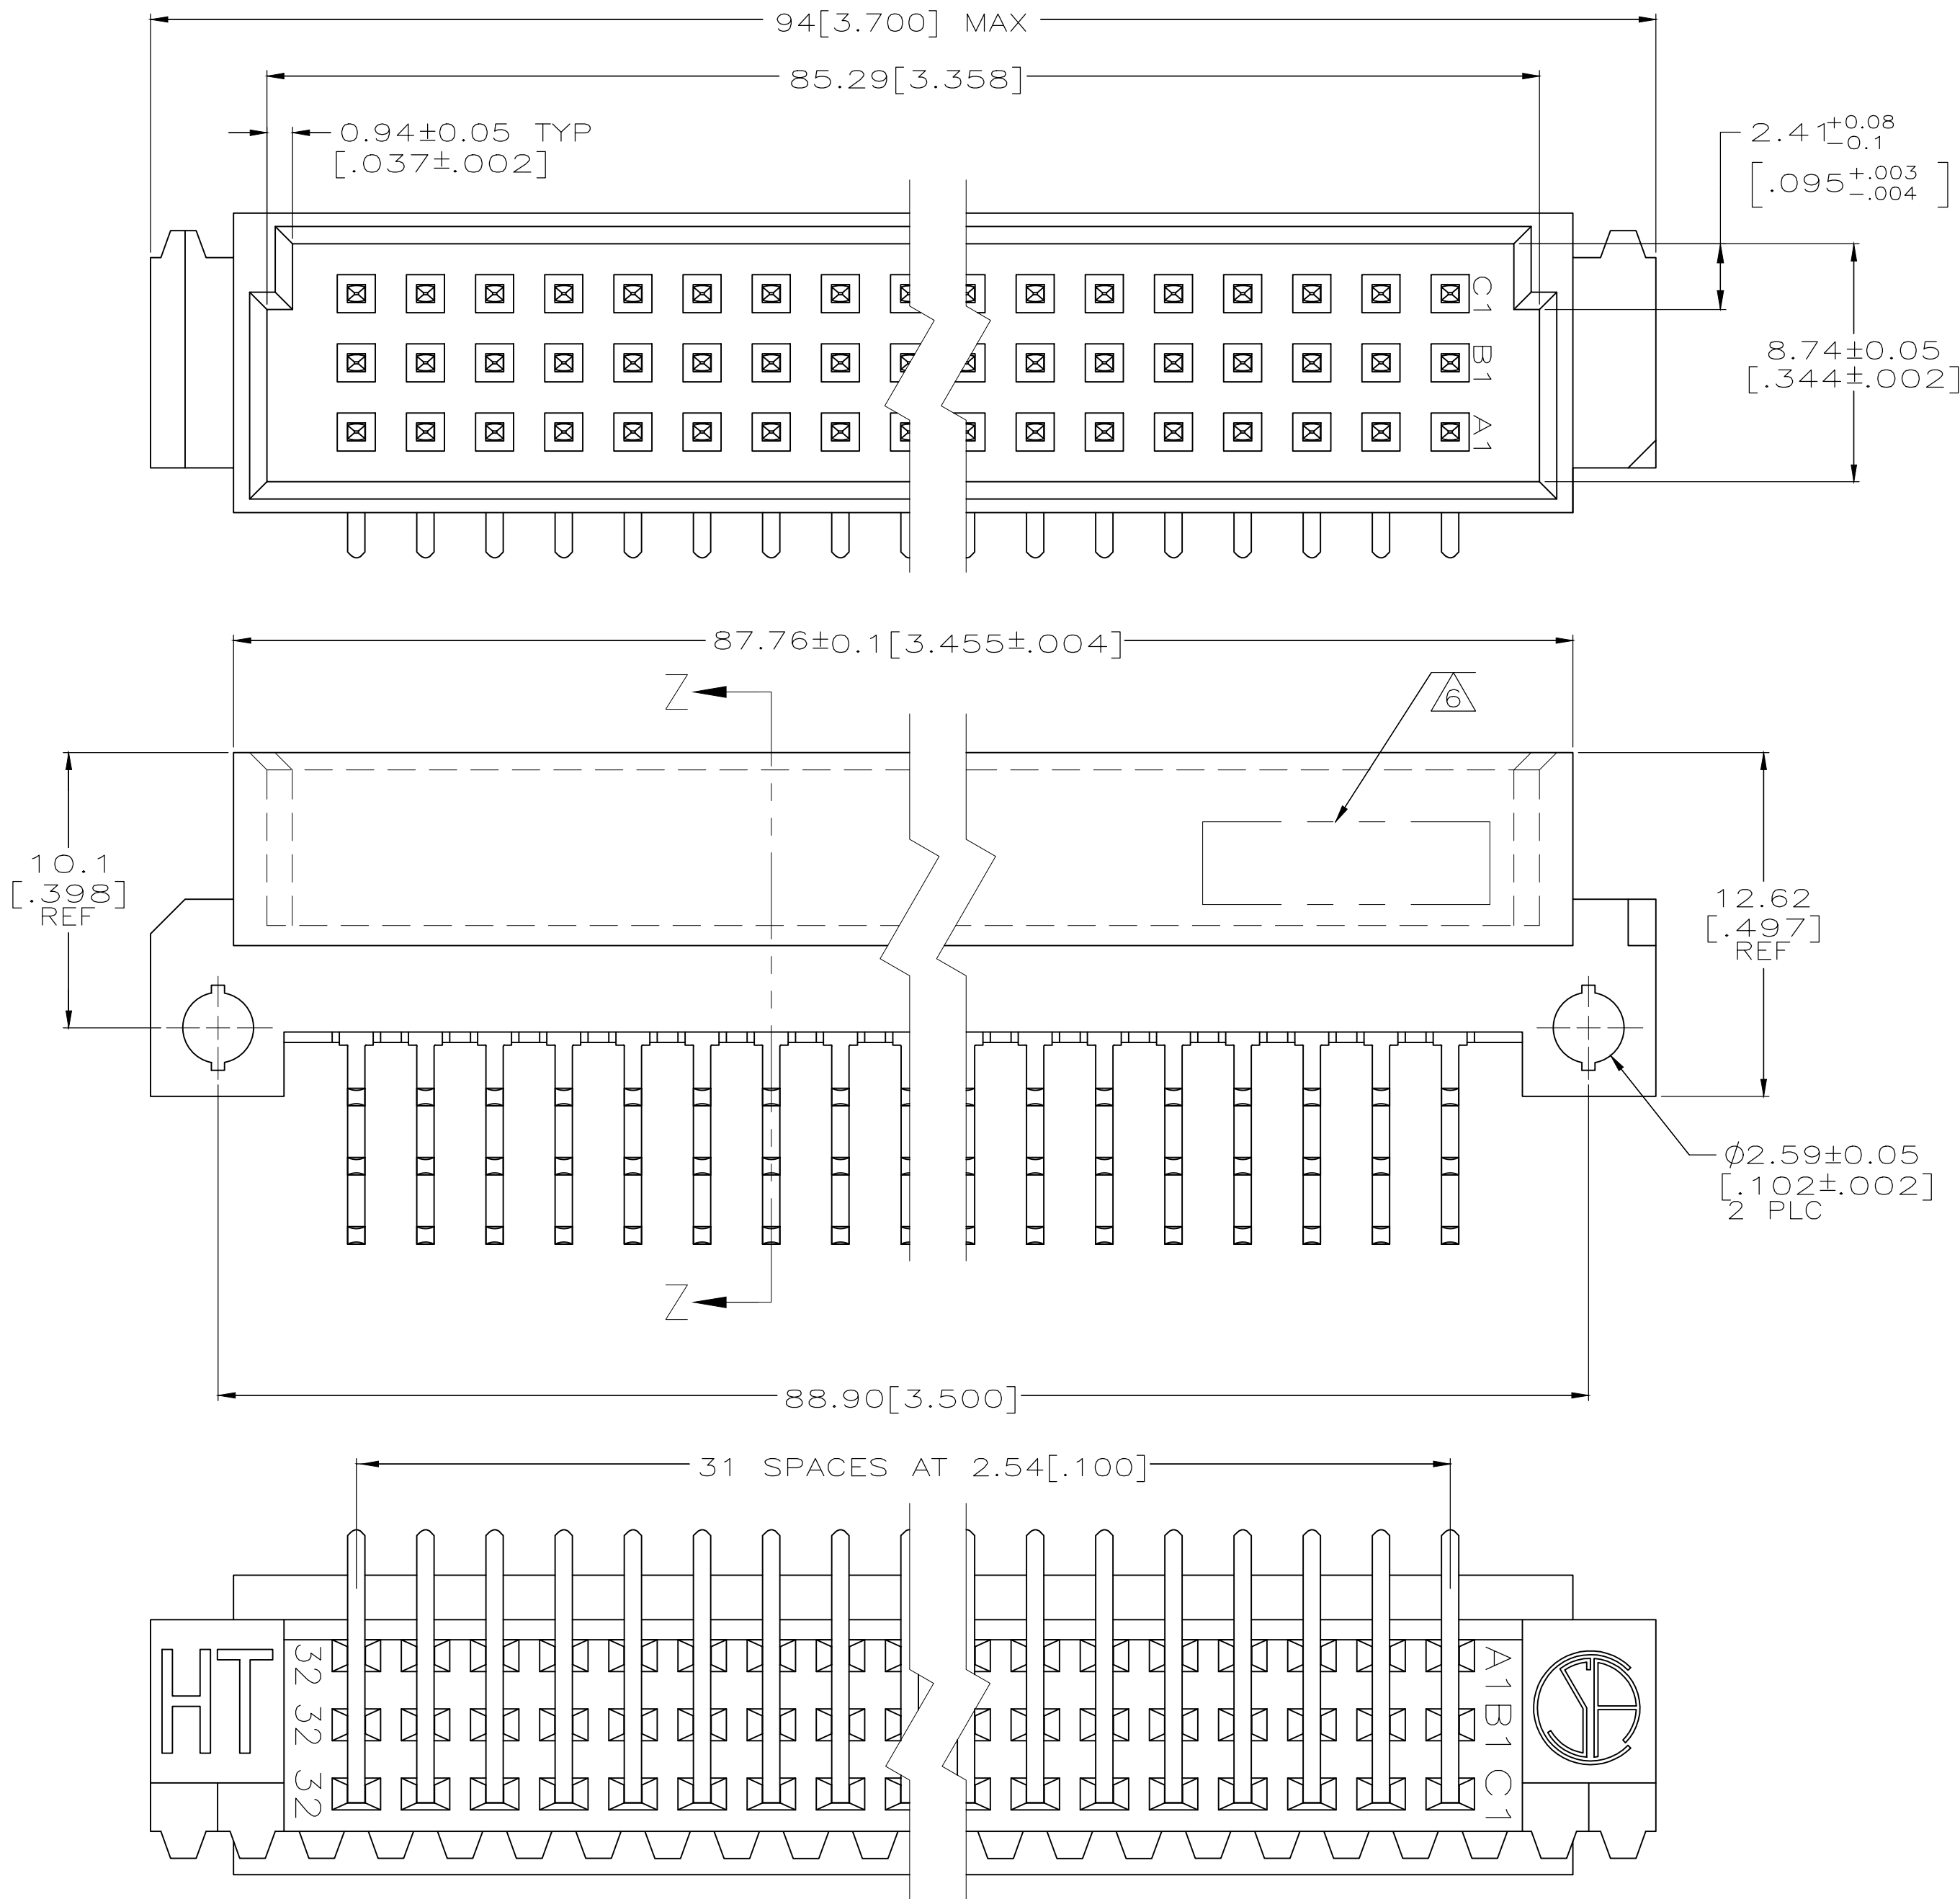
- 1 HOUSING MATERIAL: GLASS-FILLED POLYMER.
- 2 POST MATERIAL: COPPER ALLOY.
- 3 POST FINISH: DIN 41612 CLASS 2 IN CONTACT AREA.
TIN PLATE ON POSTS.
- 4 MARKING ON THIS SIDE.
- 5 RECOMMENDED HOLE SIZE FOR MANUAL APPLICATION OF
CONNECTOR ONTO PC BOARD.
- 6 PART NUMBER, DATE CODE MARKED THIS APPROXIMATE AREA.
- 7 POST FINISH: 0.76µm MIN GOLD IN CONTACT AREA.
TIN PLATE ON POSTS.





D

C

B

A



		1-32	X	X	X	96	5650947-4	
		1-32	X	X	X	96	5650947-5	
FINISH	POSITIONS LOADED	C	B	A	NO. OF LOADED POSITION	ASSY PART NUMBER		
		ROWS LOADED						
THIS DRAWING IS A CONTROLLED DOCUMENT.			DIN J. POLIGNONE	OSMAVOS	 TE Connectivity			
DIMENSIONS: mm [INCHES] 		OK	A. SHARPE	OSMAVOS				
		APVD	A. SHARPE	OSMAVOS				
		NAME						
		TOLERANCES UNLESS OTHERWISE SPECIFIED:		ASSEMBLY, PIN, EUROCARD, TYPE C				
		0 PLC ± -		96 POSITION,				
		1 PLC ± -		.130 SOLDER POST				
		2 PLC ± -						
3 PLC ± 0.13[.005]		PRODUCT SPEC						
4 PLC ± -		APPLICATION SPEC						
ANGLES ± -		—						
MATERIAL	FINISH	WEIGHT		SIZE		CAGE CODE	DRAWING NO	RESTRICTED TO
		0.000000		A1		00779	C=5650947	—
				CUSTOMER DRAWING		SCALE 5:1 SHEET 1 OF 1 REV A		