

MODEL 72

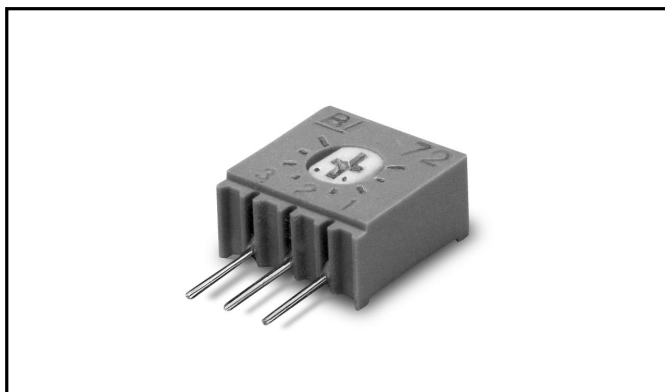
3/8" Square

Single Turn

Cermet Trimming

Potentiometer

1



ELECTRICAL

Standard Resistance Range, Ohms	10 to 2Meg
Standard Resistance Tolerance	±10% (<100 Ohms = ±20%)
Input Voltage, Maximum	200 Vdc or rms not to exceed power rating
Slider Current, Maximum	100mA or within rated power, whichever is less
Power Rating, Watts	0.5 at 85°C derating to 0 at 125°C
End Resistance, Maximum	2 Ohms
Actual Electrical Travel, Nominal	244°
Dielectric Strength	900 Vrms
Insulation Resistance, Minimum	1,000 Megohms
Resolution	Essentially infinite
Contact Resistance Variation, Maximum	1% or 1 Ohm, whichever is greater

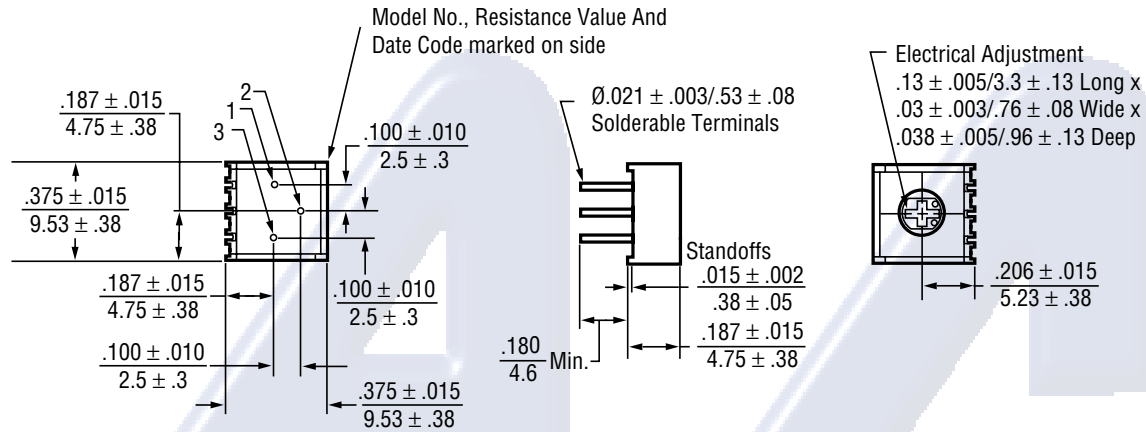
ENVIRONMENTAL

Seal	85°C Fluorinert® (No Leaks)
Temperature Coefficient, Maximum	±100ppm/°C
Operating Temperature Range	-55°C to +125°C
Thermal Shock	5 cycles, -55°C to +125°C (1% ΔRT, 1% ΔVR)
Moisture Resistance	Ten 24 hour cycles (1% ΔRT, IR 100 Megohms Min.)
Shock, 6ms Sawtooth	100G's (1% ΔRT, 1% ΔVR)
Vibration	20G's, 10 to 2,000 Hz (1% ΔRT, 1% ΔVR)
High Temperature Exposure	250 hours at 125°C (2% ΔRT, 2% ΔVR)
Rotational Life	200 cycles (3% ΔRT)
Load Life at 0.5 Watts	1,000 hours at 70°C (2% ΔRT)
Resistance to Solder Heat	260°C for 10 sec. (1% ΔRT)

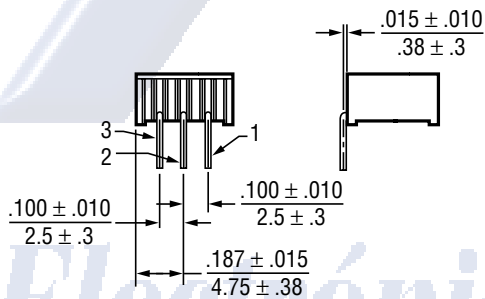
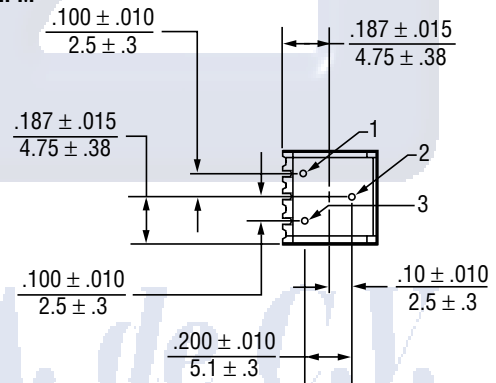
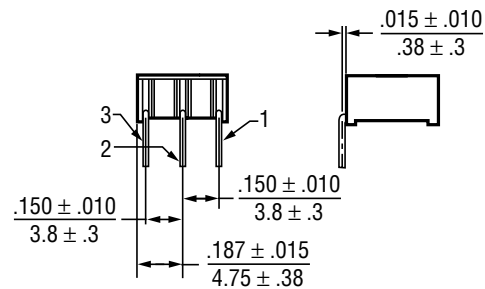
MECHANICAL

Mechanical Stops	Solid
Torque, Starting Maximum	3 oz.-in. (0.021 N-m)
Weight, Nominal	.025 oz. (0.70 grams)

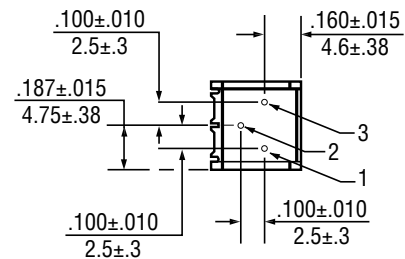
Fluorinert® is a registered trademark of 3M Company.
Specifications subject to change without notice.

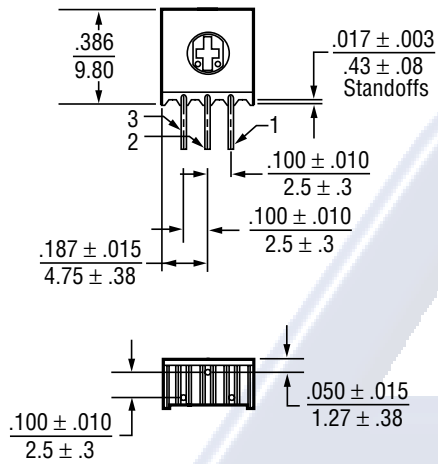
TOP ADJUSTMENT (Inch/mm)**Model 72P**

Note: Model 72P dimensions applicable to all other models except as noted

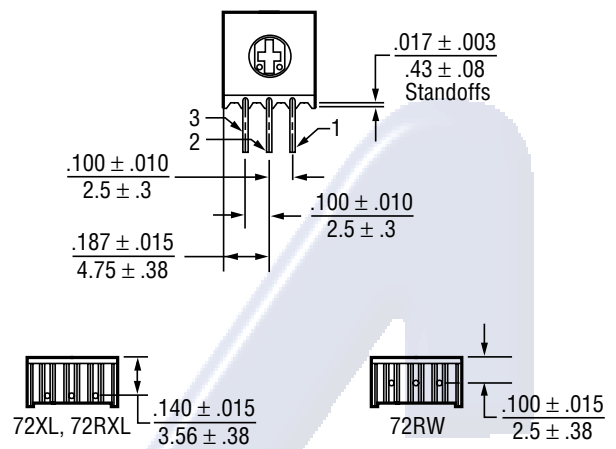
Model 72PL**Model 72PM****Model 72PX, 72RPX**

Model 72RPX - Terminals 1 and 3 are reversed

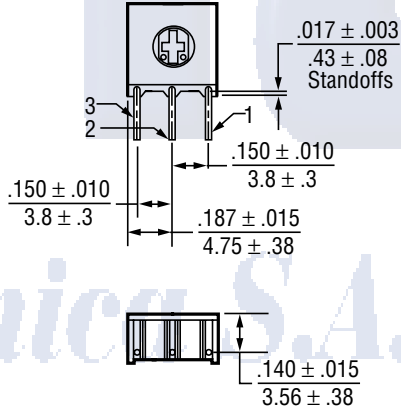
Model 72RP

SIDE ADJUSTMENT (Inch/mm)**1****Model 72X, 72RX**

Model 72RX - Terminals 1 and 3 are reversed

Model 72XL, 72RXL, 72RW

Model 72RXL And 72RW - Terminals 1 and 3 are reversed

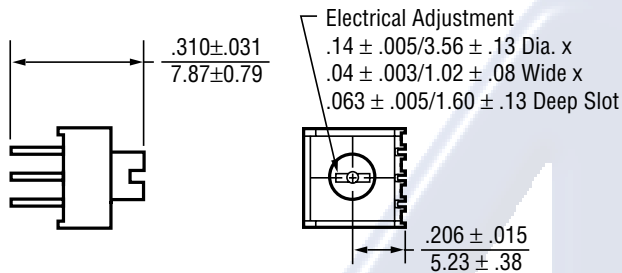
Model 72XW, 72RXW

Model 72RXW - Terminals 1 and 3 are reversed

EXTENDED ROTOR OPTION (Inch/mm)

Available for all Model 72 pin styles:

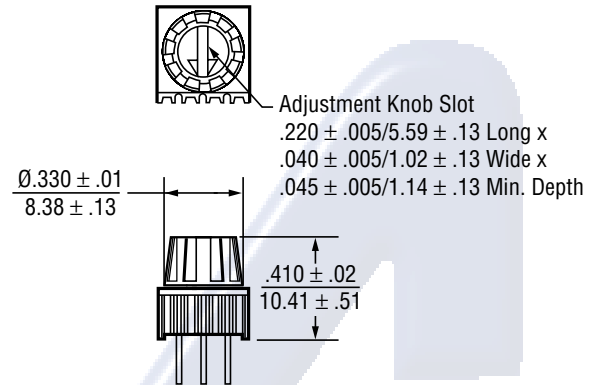
72PE, 72PLE, 72PME, 72PXE, 72RPXE, 72XE, 72RXE,
72XLE, 72RXLE, 72RWE, 72XWE, 72RXWE

**ADJUSTMENT KNOB OPTION (Inch/mm)**

Available options:

72XT- Side Adjustment (See 72X for Pin Configuration)

72PT- Top Adjustment (See 72P for Pin Configuration)



72PT Shown - Dimensions applicable to 72XT

STANDARD RESISTANCE VALUES, OHMS

10	100	1K	10K	50K	250K	2Meg
20	200	2K	20K	100K	500K	
50	500	5K	25K	200K	1Meg	

Electrónica S.A. de C.V.

PACKAGING**1****Standard:** Boxes

Capacity = 100 Units

Option: Tubes

All units oriented with #1 pin to same side.

	Pin Style		P, PM	X, XL, XW, RW
Magazine	Width	=	0.47"	0.29"
	Height	=	0.54"	0.76"
	Length	=	20.5"	20.1"
	Capacity	=	50 Units	50 Units

Option: Tape & Reel, Ammo Pack (Available only for 72RW only)

All units oriented with #1 pin to the right of the direction of feed.

	Seat Plane to Centerline of Sprocket Hole	=	.71" (18.03 mm)
Tape	Width	=	18 mm
	Sprocket	=	Single Hole .50" spacing
	Capacity	=	1,000 Units
Reel	Diameter	=	14" (356mm)
Ammo	Tape Fold	=	12" (305mm)
	Box	=	1.8" x 13" x 10" (46mm x 330mm x 254mm)

Electrónica S.A. de C.V.**BI technologies**

ORDERING INFORMATION**Standard:**

Model Series **72** Pin Style **P** Resistance Value **R** Resistance Prefix **10K**

Option:

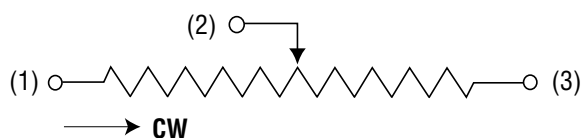
Pin Style **72 W** Resistance Value **R** Resistance Prefix **10K** Packaging Option: **TB**
 TB = Tubes
 (Pin styles P, PM, X, XL, XW, RW)

Option:

Pin Style **72 RW** Resistance Value **F** Resistance Prefix **R** Resistance Prefix **10K** Packaging Option: **TR**
 AP = Ammo pack
 TR = Tape & Reel
 (Pin style RW only)
 Pin Style Suffix: **F**
 (Used with AP and TR packaging options.
 Applicable to pin style RW only.
 "F" designates 0.70" lead length.)

Option:

Pin Style **72 X** Resistance Value **T** Resistance Prefix **R** Resistance Prefix **10K**
 Adjustment Options: **T**
 T = Knob Option
 Applicable to pin style X & P only.
E = Extended Rotor Option
 Applicable to all pin styles.

CIRCUIT DIAGRAM**NOTES**

Metric equivalents, based on 1 inch = 25.4mm are rounded to the same number of significant figures as in the original English units and are provided for general information only.

Tolerances unless otherwise specified:
 Linear = $\pm .01$ inches (.25mm)
 Angular = ± 2 degrees

