




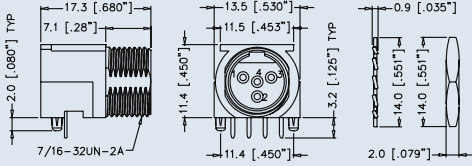

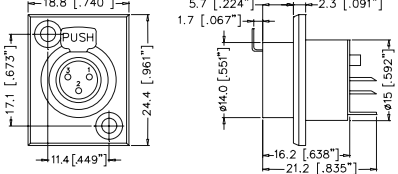
Features:

- Miniature version of the standard XLR series
- Diecast or Precision machined metal housings
- Metal cable clamp
- Precision machined pin contacts
- Stamped socket contacts
- Solder cup or Printed Circuit board contacts
- Available in 3, 4, 5 or 6 contacts
- Positive latchlock
- Flexible cable grommet

Part Number Breakdown: Page 124 Specifications: Page 125
PCB Footprints: Page 126 Panel Cutouts: Page 126

PRODUCT - FIGURE	DRAWING Dimensions in mm (inches)	DESCRIPTION	VARIATIONS	PART NUMBER
		Male cable connector, Machined contacts, Nickel Finish	3 pole	AG3M
			4 pole	AG4M
			5 pole	AG5M
			6 pole	AG6M
		Female cable connector, Stamped contacts, Nickel Finish	3 pole	AG3F
			4 pole	AG4F
			5 pole	AG5F
			6 pole	AG6F
		Female cable connector with locking ring, Stamped contacts, Nickel Finish.	3 pole	AG3FL
			4 pole	AG4FL
			5 pole	AG5FL
			6 pole	AG6FL
		Male chassis connector, Machined contacts, Nickel Finish	3 pole	AG3MCC
			4 pole	AG4MCC
			5 pole	AG5MCC
			6 pole	AG6MCC
		Female chassis connector, Stamped contacts, Nickel Finish	3 pole	AG3FCE
			4 pole	AG4FCE
			5 pole	AG5FCE
			6 pole	AG6FCE
		Male chassis connector, Horizontal PCB, Machined contacts, Nickel Finish	3 pole	AG3MCCH
			4 pole	AG4MCCH
			5 pole	AG5MCCH
			6 pole	AG6MCCH
		Female chassis connector, Horizontal PCB, Stamped contacts, Nickel Finish	3 pole	AG3FCCH
			4 pole	AG4FCCH
			5 pole	AG5FCCH
			6 pole	AG6FCCH




	 <p>17.3 [.680"] 7.1 [.28"] 2.0 [.080"] TYP 7/16-32UN-2A 13.5 [.530"] 11.5 [.453"] 11.4 [.450"] 3.2 [.125"] TYP 0.9 [.035"] 14.0 [.551"] 14.0 [.551"] 2.0 [.079"]</p>	Male chassis connector, Horizontal PCB, Machined contacts, Thermoplastic shell	4 pole	AG4MPCH
	 <p>18.8 [.740"] 17.1 [.673"] 24.4 [.961"] 11.4 [.449"] 5.7 [.224"] 1.7 [.067"] 2.3 [.091"] 16.2 [.638"] 21.2 [.835"] 14.0 [.551"] 15 [.592"]</p>	Female chassis connector, Stamped contacts, Nickel Finish	3 pole 4 pole 5 pole 6 pole	AG3FCRV AG4FCRV AG5FCRV AG6FCRV

PART NUMBER BREAKDOWN

G TYPE CONNECTORS

E. G. **AG3MCCHB**
AG (Series Prefix), **3** contacts, **Male**, **C**hassis **C**onconnector, **H**orizontal PCB **C**ontacts, **B**lack finish.

SERIES PREFIX	AG	=	Series Prefix
CONTACT LAYOUTS	3	=	3 Contacts
	4	=	4 Contacts
	5	=	5 Contacts
	6	=	6 Contacts
GENDER	F	=	Female Socket Contacts
	M	=	Male Pin Contacts
	Blank	=	Cable Connector Standard (Male or Female)
SHELL STYLE	J	=	Cable Connector Large Cable clamp / boot O.D (Male or Female)
	L	=	Cable Connector with locking ring (Female)
	LL	=	Latchless (Chassis Connector)
	CC	=	Chassis Connector Circular Metal (Male)
	CE	=	Rear Mount (Chassis Connector)
	CM	=	Mid Mount (Chassis Connector)
	CR	=	Chassis Connector Rectangular Metal (Female)
	PC	=	Chassis Connector Plastic (Male)
	Blank	=	Solder Buckets (All styles except PC, CR)
CONTACT TYPE	H	=	Horizontal PCB (Style CC, PC only)
	V	=	Vertical PCB (Style CR only)
	Blank	=	Nickel Plated Finish
SHELL FINISH	B	=	Black Finish

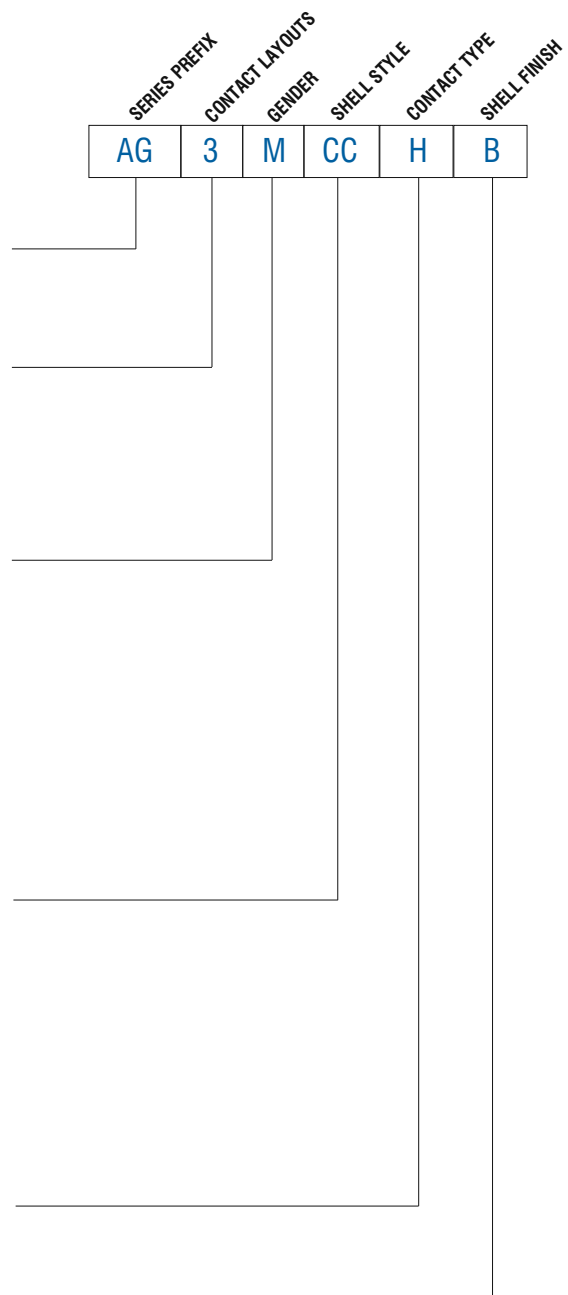

STANDARD DATA G TYPE


		VALUE			
GENERAL CHARACTERISTICS	Number of Contacts	3	4	5	6
	Termination	Printed Circuit Board (PCB) or Solder Bucket			
	Max. Wire Gauge - Stranded Wire	AWG 24 - 0.5mm ²			AWG 28 - 0.38mm ²
	Flammability	UL94V-0			
	Environmental	Complies with EU RoHS 2 Directive 2011/65/EU			
ELECTRICAL CHARACTERISTICS	Service Voltage RMS	1000V			250V
	Test Voltage AC RMS	125V AC			
	Current Carrying Capacity	5A	5A	4A	1.2A
	Typical Contact Resistance	≤10mΩ			
	Insulation resistance (initial)	≥510MΩ			
	After Damp Heat Test	≥10MΩ			
CLIMATIC CHARACTERISTICS	Dielectric Strength	1500 V dc			
	Protection Class	IP00			
MECHANICAL CHARACTERISTICS	Operating Temperature	-30°C to +80°C (-20F - +176F)			
	Insertion Spring Separating Force	≥20N			
	Cable O.D.	2mm to 3.5mm (0.078" to 0.137")		3mm to 5mm (0.118" to 0.196")	
	Mechanical Operations	5000 mating cycles			2000 mating cycles
	Weight	13.5g (0.029lb)			
MATERIALS	Connector Shell	Bronze & Zinc			
	Connector Shell Finish	Nickel Plated			
	Insulators	PPS - Black			
	Male Contact	Material - Brass C3604 Plating - Gold over Silver Plated			
	Female Contact	Material - Brass C5210P Plating - Gold over Silver Plated			
	Latch Lock and Spring	SUS (AISI - 301) - Nickel Plated			
	Adaptor	PPS - Black			
	Cable Clamp	Bronze - Nickel Plated			
	Boot/Backshell	ABS - Black			
	Grommet	PU - Black			

Rev 4 - 05/2014


¹⁾ Approximate weight only, does not include packaging. Please contact us for exact weight for shipping purposes.




PANEL CUTOUTS - CONNECTOR SIDE OF PCB




AG3MCC




AG4MCC




AG5MCC




AG6MCC




AG3FCCH




AG3MCCH




AG4FCCH




AG4MCCH




AG5FCCH




AG5MCCH




AG6FCCH




AG6MCCH




AG3FCRV




AG4FCRV




AG5FCRV



AG6FCRV




AG4MPCH




AG3FCE


PANEL CUTOUTS - FRONT VIEW




AG3MCC
AG4MCC
AG5MCC
AG6MCC



AG3MCC
AG4MCC
AG5MCC
AG6MCC
AG4MPCH

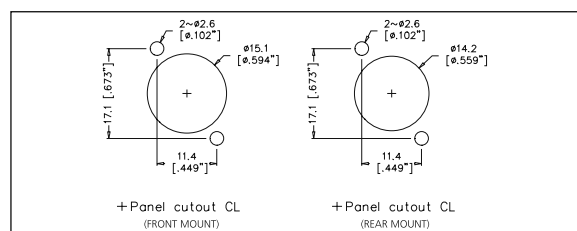

AG3FCRV
AG4FCRV
AG5FCRV
AG6FCRV



AG3FCRV
AG4FCRV
AG5FCRV
AG6FCRV