

BGU7007

SiGe:C Low Noise Amplifier MMIC for GPS, GLONASS, Galileo and Compass

Rev. 4. — 18 January 2017

Product data sheet

1. Product profile

1.1 General description

The BGU7007 is, also known as the GPS1102M, a Low Noise Amplifier (LNA) for GNSS receiver applications in a plastic leadless 6-pin, extremely small SOT886 package. The BGU7007 requires only one external matching inductor and one external decoupling capacitor.

The BGU7007 adapts itself to the changing environment resulting from co-habitation of different radio systems in modern cellular handsets. It has been designed for low power consumption and optimal performance when jamming signals from co-existing cellular transmitters are present. At low jamming power levels it delivers 18.5 dB gain at a noise figure of 0.85 dB. During high jamming power levels, resulting for example from a cellular transmit burst, it temporarily increases its bias current to improve sensitivity.

CAUTION



This device is sensitive to ElectroStatic Discharge (ESD). Therefore care should be taken during transport and handling.

1.2 Features and benefits

- Covers full GNSS L1 band, from 1559 MHz to 1610 MHz
- Noise figure (NF) = 0.85 dB
- Gain 18.5 dB
- High input 1 dB compression point P_i (1dB) of -12 dBm
- High out of band $IP3_i$ of 4 dBm
- Supply voltage 1.5 V to 3.1 V
- Power-down mode current consumption < 1 μ A
- Optimized performance at low supply current of 4.8 mA
- Integrated temperature stabilized bias for easy design
- Requires only one input matching inductor and one supply decoupling capacitor
- Input and output DC decoupled
- ESD protection on all pins (HBM > 2 kV)
- Integrated matching for the output
- Small 6-pin leadless package 1 mm × 1.45 mm × 0.5 mm
- 110 GHz transit frequency - SiGe:C technology



1.3 Applications

- LNA for GPS, GLONASS, Galileo and Compass (BeiDou) in smart phones, feature phones, tablet PCs, Personal Navigation Devices, Digital Still Cameras, Digital Video Cameras, RF Front End modules, complete GPS chipset modules and theft protection (laptop, ATM)

1.4 Quick reference data

Table 1. Quick reference data

$f = 1559 \text{ MHz to } 1610 \text{ MHz}$; $V_{CC} = 1.8 \text{ V}$; $P_I < -40 \text{ dBm}$; $T_{amb} = 25 \text{ }^\circ\text{C}$; input matched to $50 \text{ } \Omega$ using a 5.6 nH inductor; unless otherwise specified.

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
V_{CC}	supply voltage	RF input AC coupled	1.5	-	3.1	V
I_{CC}	supply current	$V_{ENABLE} \geq 0.8 \text{ V}$				
		$P_I < -40 \text{ dBm}$	3.4	4.8	6.1	mA
		$P_I = -20 \text{ dBm}$	8.9	12.8	15.9	mA
G_p	power gain	$P_I < -40 \text{ dBm}$, no jammer	16.5	18.5	20.5	dB
		$P_I = -20 \text{ dBm}$	17.5	19.5	21.5	dB
NF	noise figure	$P_I < -40 \text{ dBm}$, no jammer [1]	-	0.85	1.2	dB
		$P_I < -40 \text{ dBm}$, no jammer [2]	-	0.90	1.3	dB
		$P_I = -20 \text{ dBm}$	-	1.2	1.6	dB
$P_{I(1dB)}$	input power at 1 dB gain compression	$f = 1559 \text{ MHz to } 1610 \text{ MHz}$				
		$V_{CC} = 1.5 \text{ V}$	-16	-13	-	dBm
		$V_{CC} = 1.8 \text{ V}$	-15	-12	-	dBm
		$V_{CC} = 2.85 \text{ V}$	-14	-11	-	dBm
$IP3_i$	input third-order intercept point	$f = 1.575 \text{ GHz}$				
		$V_{CC} = 1.5 \text{ V}$	[3]	1	4	dBm
		$V_{CC} = 1.8 \text{ V}$	[3]	1	4	dBm
		$V_{CC} = 2.85 \text{ V}$	[3]	2	5	dBm



[1] PCB losses are subtracted.

[2] Including PCB losses.

[3] $f_1 = 1713 \text{ MHz}$; $f_2 = 1851 \text{ MHz}$; $P_1 = P_2 = -30 \text{ dBm}$.

2. Pinning information

Table 2. Pinning

Pin	Description	Simplified outline	Graphic symbol
1	GND	 Transparent top view	 sym129
2	GND		
3	RF_IN		
4	V_{CC}		
5	ENABLE		
6	RF_OUT		

3. Ordering information

Table 3. Ordering information

Type number	Package		
	Name	Description	Version
BGU7007	XSON6	plastic extremely thin small outline package; no leads; 6 terminals; body 1 × 1.45 × 0.5 mm	SOT886

4. Marking

Table 4. Marking codes

Type number	Marking code
BGU7007	B6

5. Limiting values

Table 5. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134).

Symbol	Parameter	Conditions	Min	Max	Unit
V_{CC}	supply voltage	RF input AC coupled	−0.5	5.0	V
V_{ENABLE}	voltage on pin ENABLE	$V_{ENABLE} < V_{CC} + 0.6$	[2] −0.5	5.0	V
V_{RF_IN}	voltage on pin RF_IN	DC; $V_{RF_IN} < V_{CC} + 0.6$	[2][3] −0.5	5.0	V
V_{RF_OUT}	voltage on pin RF_OUT	DC; $V_{RF_OUT} < V_{CC} + 0.6$	[2][3] −0.5	5.0	V
P_i	input power		-	0	dBm
P_{tot}	total power dissipation	$T_{sp} \leq 130\text{ °C}$	[1]	55	mW
T_{stg}	storage temperature		−65	150	°C
T_j	junction temperature		-	150	°C
V_{ESD}	electrostatic discharge voltage	Human Body Model (HBM); According JEDEC standard 22-A114E	-	4	kV
		Charged Device Model (CDM); According JEDEC standard 22-C101B	-	1	kV

[1] T_{sp} is the temperature at the soldering point of the emitter lead.

[2] Warning: due to internal ESD diode protection, the applied DC voltage should not exceed $V_{CC} + 0.6$ and shall not exceed 5.0 V in order to avoid excess current.

[3] The RF input and RF output are AC coupled through internal DC blocking capacitors.

6. Thermal characteristics

Table 6. Thermal characteristics

Symbol	Parameter	Conditions	Typ	Unit
$R_{th(j-sp)}$	thermal resistance from junction to solder point		225	K/W

7. Characteristics

Table 7. Characteristics

$f = 1559 \text{ MHz to } 1610 \text{ MHz}$; $V_{CC} = 1.8 \text{ V}$; $V_{ENABLE} \geq 0.8 \text{ V}$; $P_i < -40 \text{ dBm}$; $T_{amb} = 25 \text{ }^\circ\text{C}$; input matched to $50 \text{ }\Omega$ using a 5.6 nH inductor; unless otherwise specified.

Symbol	Parameter	Conditions	Min	Typ	Max	Unit		
V _{CC}	supply voltage	RF input AC coupled	1.5	-	3.1	V		
I _{CC}	supply current	V _{ENABLE} ≥ 0.8 V						
		P _i < −40 dBm	3.4	4.8	6.1	mA		
		P _i = −20 dBm	8.9	12.8	15.9	mA		
		V _{ENABLE} ≤ 0.35 V	-	-	1	μA		
T _{amb}	ambient temperature		−40	+25	+85	°C		
G _p	power gain	T _{amb} = 25 °C						
		P _i < −40 dBm, no jammer	16.5	18.5	20.5	dB		
		P _i = −20 dBm, no jammer	17.5	19.5	21.5	dB		
		P _{jam} = −20 dBm; f _{jam} = 850 MHz	17.5	19.5	21.5	dB		
		P _{jam} = −20 dBm; f _{jam} = 1850 MHz	17.5	19.5	21.5	dB		
		−40 °C ≤ T _{amb} ≤ +85 °C						
		P _i < −40 dBm, no jammer	16	-	21	dB		
		P _i = −20 dBm, no jammer	17	-	22	dB		
		P _{jam} = −20 dBm; f _{jam} = 850 MHz	17	-	22	dB		
		P _{jam} = −20 dBm; f _{jam} = 1850 MHz	17	-	22	dB		
		RL _{in}	input return loss	P _i < −40 dBm	5	7	-	dB
				P _i = −20 dBm	7	10	-	dB
RL _{out}	output return loss	P _i < −40 dBm	12	18	-	dB		
		P _i = −20 dBm	15	24	-	dB		
ISL	isolation		22	24	-	dB		
NF	noise figure	T _{amb} = 25 °C						
		P _i < −40 dBm, no jammer	[1]	-	0.85	1.2	dB	
		P _i < −40 dBm, no jammer	[2]	-	0.90	1.3	dB	
		P _i = −20 dBm, no jammer	-	1.2	1.6	dB		
		P _{jam} = −20 dBm; f _{jam} = 850 MHz	-	1.1	1.5	dB		
		P _{jam} = −20 dBm; f _{jam} = 1850 MHz	-	1.3	1.7	dB		
		−40 °C ≤ T _{amb} ≤ +85 °C						
		P _i < −40 dBm, no jammer	-	-	1.7	dB		
		P _i = −20 dBm, no jammer	-	-	1.9	dB		
		P _{jam} = −20 dBm; f _{jam} = 850 MHz	-	-	1.8	dB		
		P _{jam} = −20 dBm; f _{jam} = 1850 MHz	-	-	2.0	dB		

Table 7. Characteristics ...continued

$f = 1559 \text{ MHz to } 1610 \text{ MHz}$; $V_{CC} = 1.8 \text{ V}$; $V_{ENABLE} \geq 0.8 \text{ V}$; $P_i < -40 \text{ dBm}$; $T_{amb} = 25 \text{ }^\circ\text{C}$; input matched to $50 \text{ }\Omega$ using a 5.6 nH inductor; unless otherwise specified.

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
$P_{i(1dB)}$	input power at 1 dB gain compression	$f = 1559 \text{ MHz to } 1610 \text{ MHz}$				
		$V_{CC} = 1.5 \text{ V}$	-16	-13	-	dBm
		$V_{CC} = 1.8 \text{ V}$	-15	-12	-	dBm
		$V_{CC} = 2.85 \text{ V}$	-14	-11	-	dBm
		$f = 806 \text{ MHz to } 928 \text{ MHz}$				
		$V_{CC} = 1.5 \text{ V}$	[3] -16	-13	-	dBm
		$V_{CC} = 1.8 \text{ V}$	[3] -15	-12	-	dBm
		$V_{CC} = 2.85 \text{ V}$	[3] -15	-12	-	dBm
		$f = 1612 \text{ MHz to } 1909 \text{ MHz}$				
		$V_{CC} = 1.5 \text{ V}$	[3] -14	-11	-	dBm
		$V_{CC} = 1.8 \text{ V}$	[3] -13	-10	-	dBm
		$V_{CC} = 2.85 \text{ V}$	[3] -11	-8	-	dBm
$IP3_i$	input third-order intercept point	$f = 1.575 \text{ GHz}$				
		$V_{CC} = 1.5 \text{ V}$	[4] 1	4	-	dBm
		$V_{CC} = 1.8 \text{ V}$	[4] 1	4	-	dBm
		$V_{CC} = 2.85 \text{ V}$	[4] 2	5	-	dBm
t_{on}	turn-on time		[5] -	-	2	μs
t_{off}	turn-off time		[5] -	-	1	μs
K	Rollett stability factor		1	-	-	

[1] PCB losses are subtracted.

[2] Including PCB losses.

[3] Out of band.

[4] $f_1 = 1713 \text{ MHz}$; $f_2 = 1851 \text{ MHz}$; $P_1 = P_2 = -30 \text{ dBm}$.

[5] Within 10 % of the final gain.

Table 8. ENABLE (pin 5)

$-40 \text{ }^\circ\text{C} \leq T_{amb} \leq +85 \text{ }^\circ\text{C}$; $1.5 \text{ V} \leq V_{CC} \leq 3.1 \text{ V}$

$V_{ENABLE} \text{ (V)}$	State
≤ 0.35	OFF
≥ 0.8	ON

8. Application information

8.1 GNSS LNA



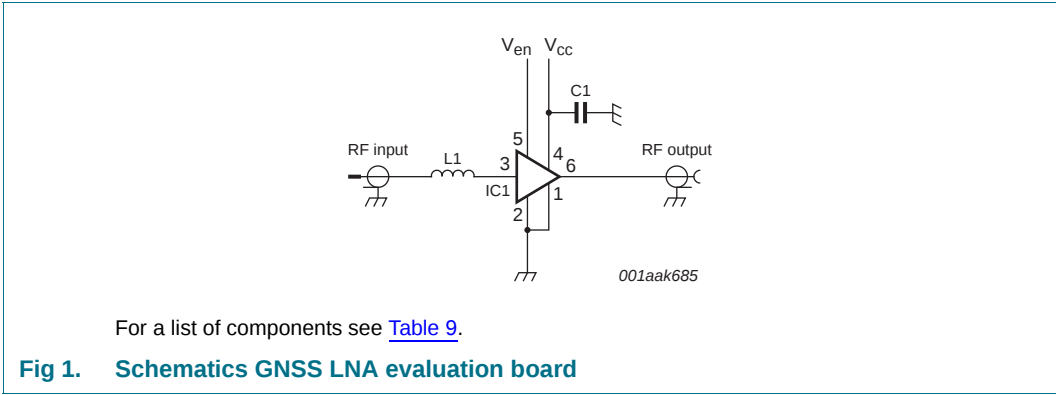


Table 9. List of components

For schematics see [Figure 1](#).

Component	Description	Value	Supplier	Remarks
C1	decoupling capacitor	1 nF	various	
IC1	BGU7007	-	NXP	
L1	high quality matching inductor	5.6 nH	Murata LQW15A	

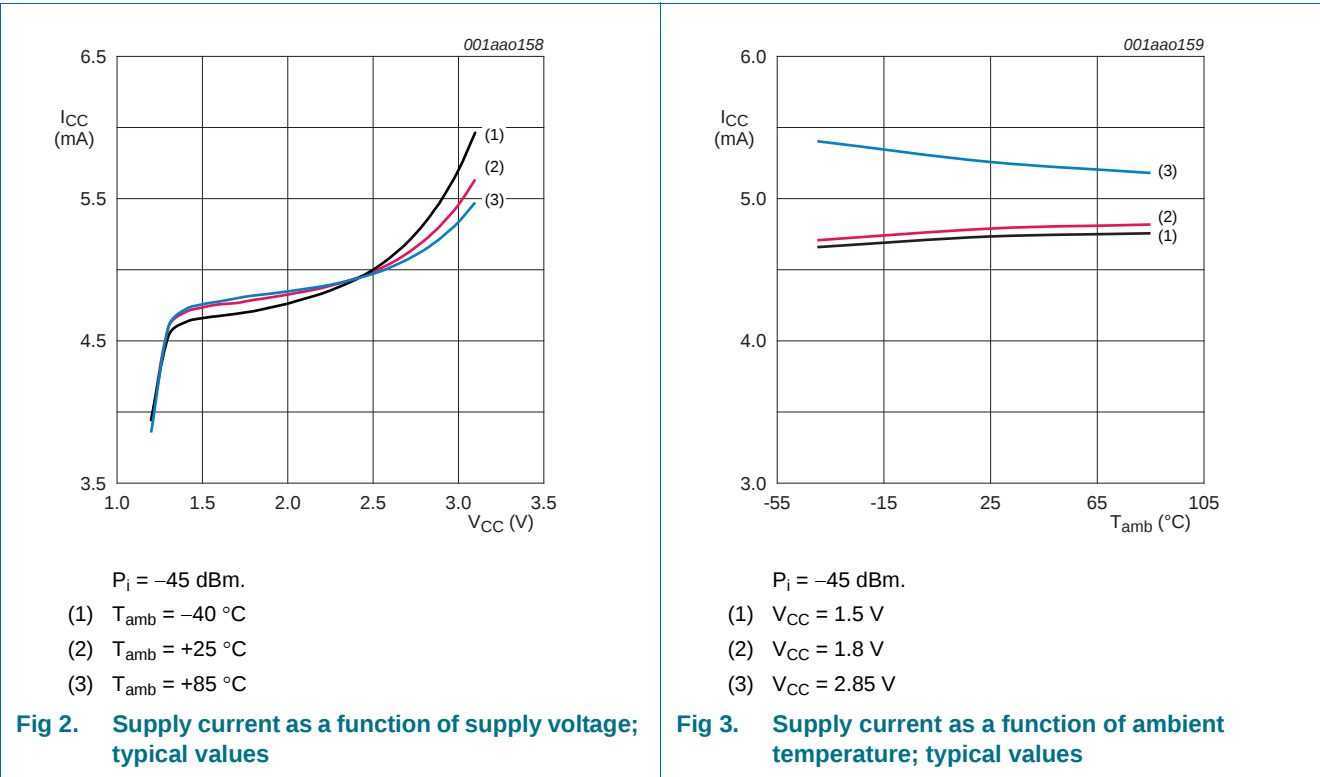


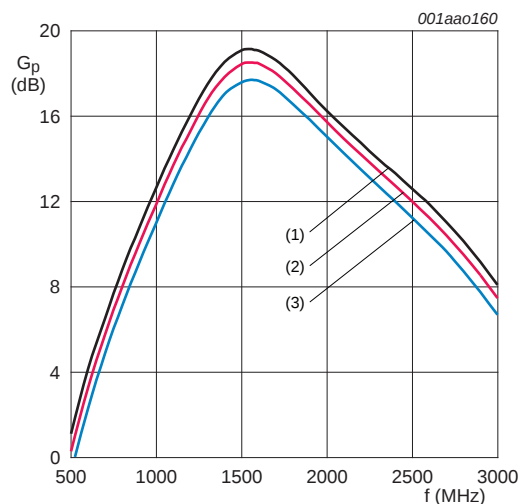

$V_{CC} = 1.8 \text{ V}$; $P_i = -45 \text{ dBm}$.

- (1) $T_{amb} = -40 \text{ }^{\circ}\text{C}$
- (2) $T_{amb} = +25 \text{ }^{\circ}\text{C}$
- (3) $T_{amb} = +85 \text{ }^{\circ}\text{C}$


Fig 4. Power gain as a function of frequency; typical values

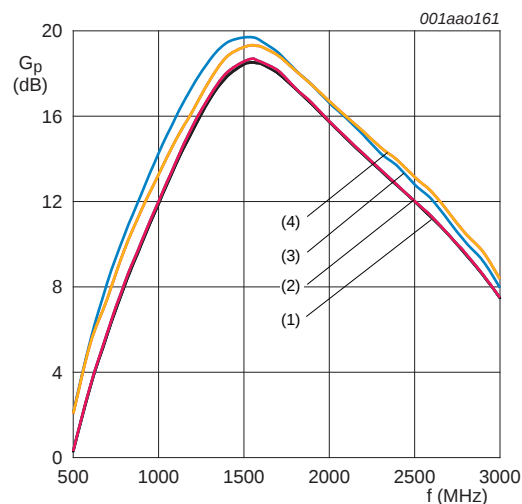

$V_{CC} = 1.8 \text{ V}$; $T_{amb} = 25 \text{ }^{\circ}\text{C}$.

- (1) $P_i = -45 \text{ dBm}$
- (2) $P_i = -30 \text{ dBm}$
- (3) $P_i = -20 \text{ dBm}$
- (4) $P_i = -15 \text{ dBm}$


Fig 5. Power gain as a function of frequency; typical values

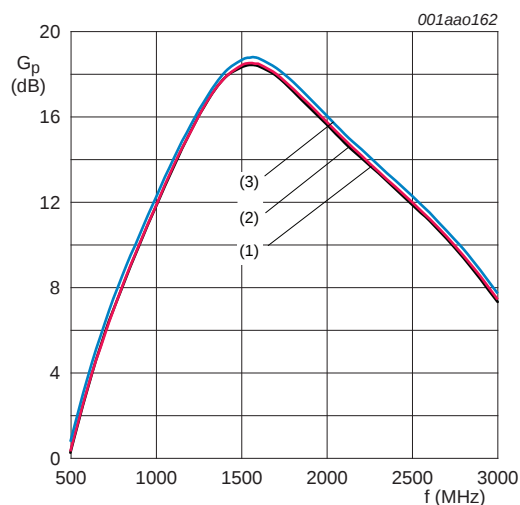

$P_i = -45 \text{ dBm}$; $T_{amb} = 25 \text{ }^{\circ}\text{C}$.

- (1) $V_{CC} = 1.5 \text{ V}$
- (2) $V_{CC} = 1.8 \text{ V}$
- (3) $V_{CC} = 2.85 \text{ V}$




Fig 6. Power gain as a function of frequency; typical values

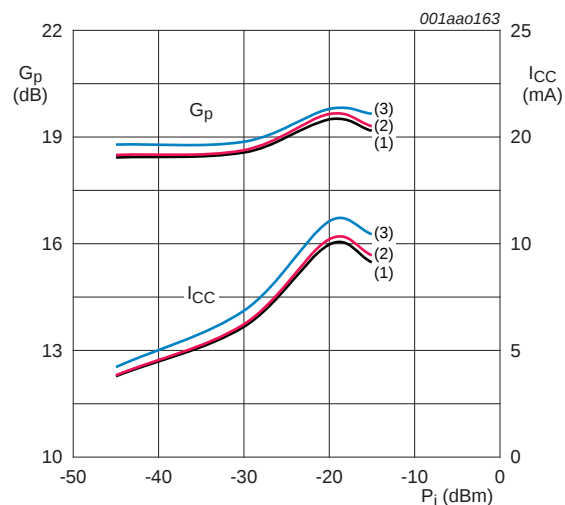


$T_{amb} = 25 \text{ }^{\circ}\text{C}$; $f = 1575 \text{ MHz}$.

- (1) $V_{CC} = 1.5 \text{ V}$
- (2) $V_{CC} = 1.8 \text{ V}$
- (3) $V_{CC} = 2.85 \text{ V}$

Fig 7. Power gain as a function of input power; typical values

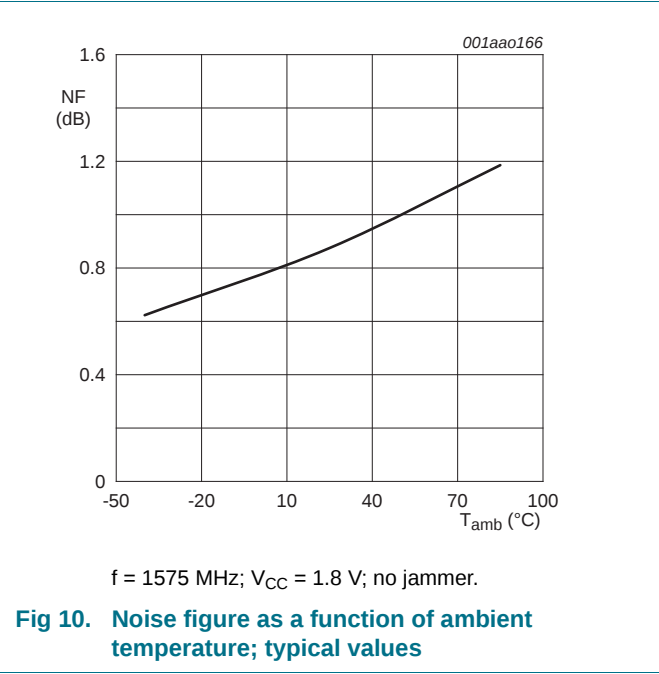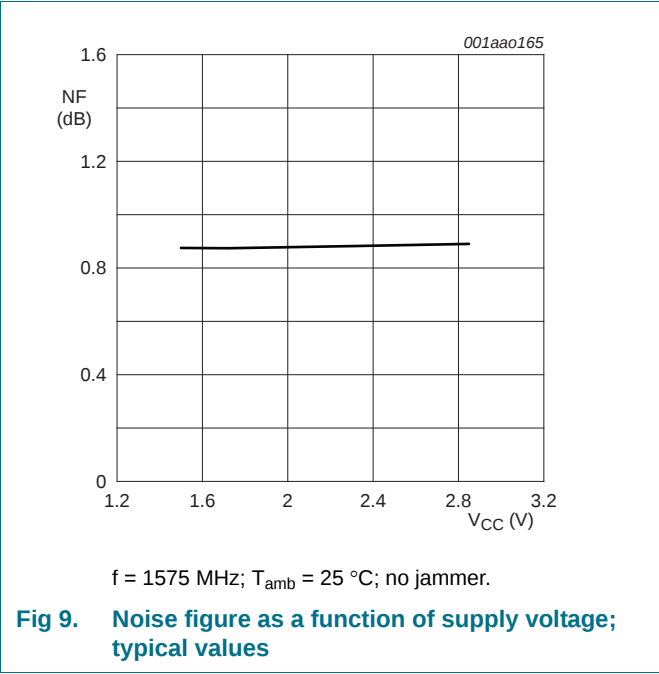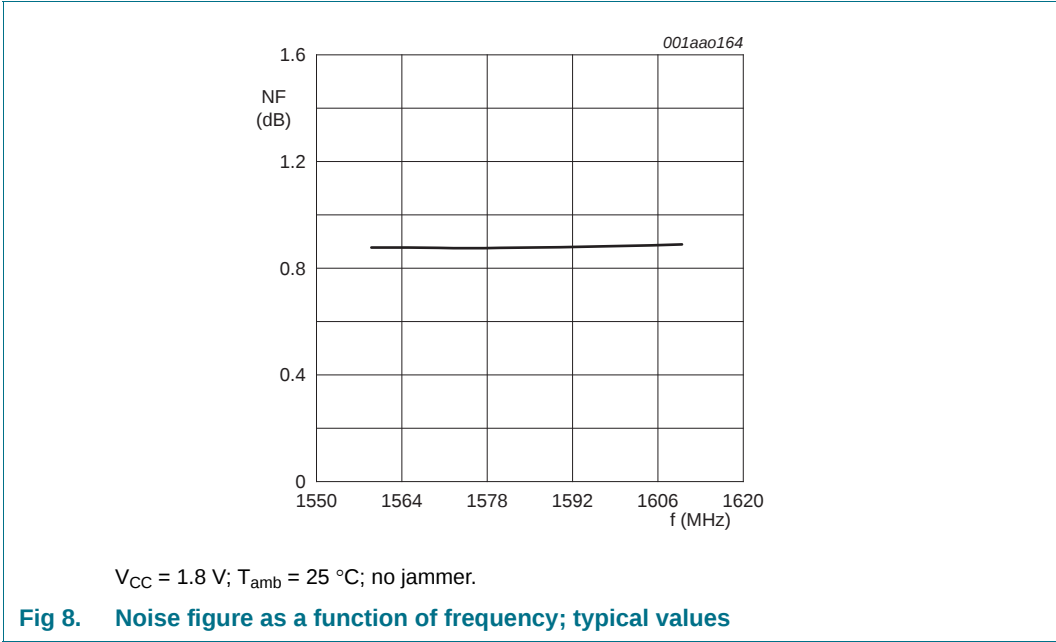


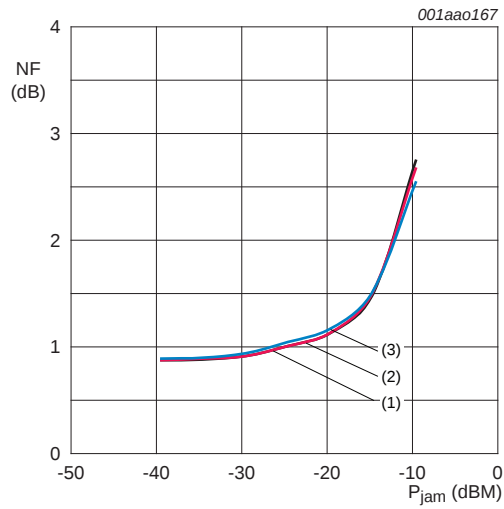

$f_{jam} = 850$ MHz; $T_{amb} = 25$ °C; $f = 1575$ MHz.

- (1) $V_{CC} = 1.5$ V
- (2) $V_{CC} = 1.8$ V
- (3) $V_{CC} = 2.85$ V


Fig 11. Noise figure as a function of jamming power; typical values

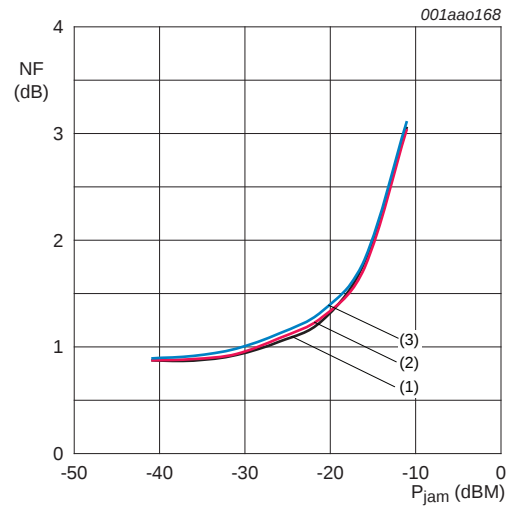

$f_{jam} = 1850$ MHz; $T_{amb} = 25$ °C; $f = 1575$ MHz.

- (1) $V_{CC} = 1.5$ V
- (2) $V_{CC} = 1.8$ V
- (3) $V_{CC} = 2.85$ V


Fig 12. Noise figure as a function of jamming power; typical values

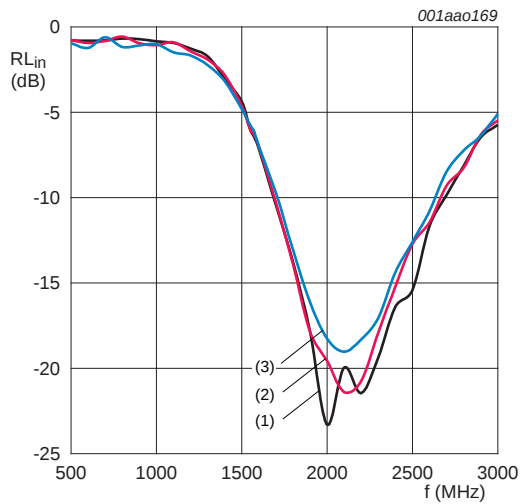

$V_{CC} = 1.8$ V; $P_i = -45$ dBm.

- (1) $T_{amb} = -40$ °C
- (2) $T_{amb} = +25$ °C
- (3) $T_{amb} = +85$ °C


Fig 13. Input return loss as a function of frequency; typical values

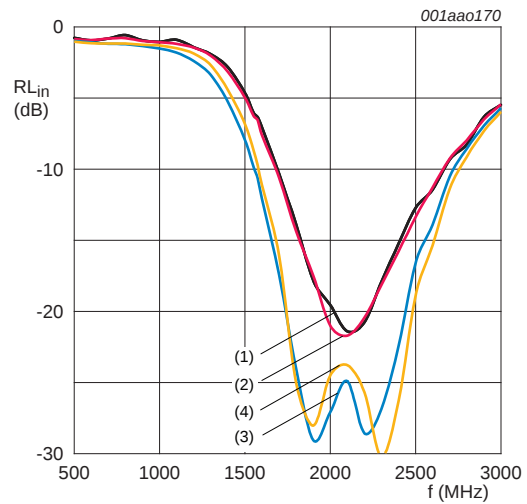

$V_{CC} = 1.8$ V; $T_{amb} = 25$ °C.

- (1) $P_i = -45$ dBm
- (2) $P_i = -30$ dBm
- (3) $P_i = -20$ dBm
- (4) $P_i = -15$ dBm


Fig 14. Input return loss as a function of frequency; typical values

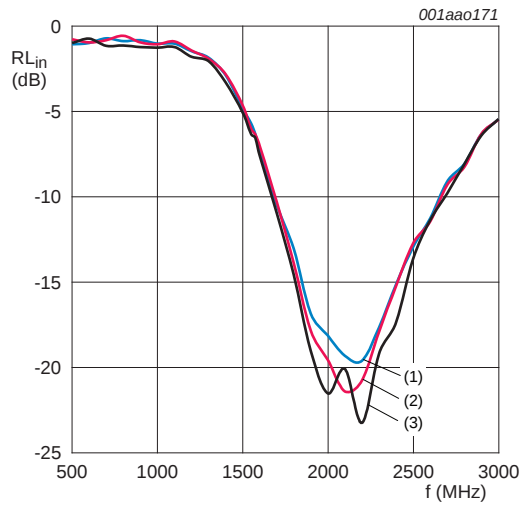

$P_i = -45$ dBm; $T_{amb} = 25$ °C.

- (1) $V_{CC} = 1.5$ V
- (2) $V_{CC} = 1.8$ V
- (3) $V_{CC} = 2.85$ V


Fig 15. Input return loss as a function of frequency; typical values

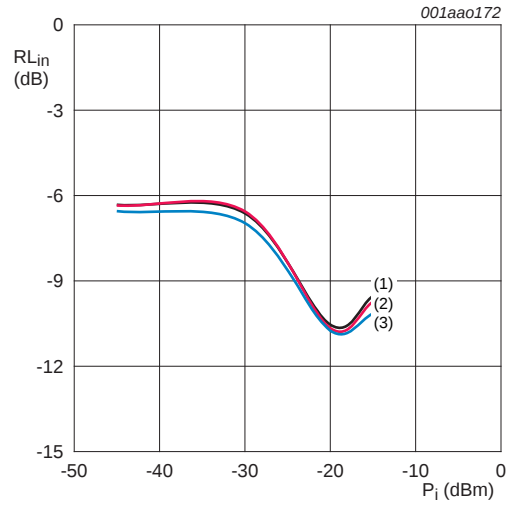

$T_{amb} = 25$ °C; $f = 1575$ MHz.

- (1) $V_{CC} = 1.5$ V
- (2) $V_{CC} = 1.8$ V
- (3) $V_{CC} = 2.85$ V


Fig 16. Input return loss as a function of input power; typical values

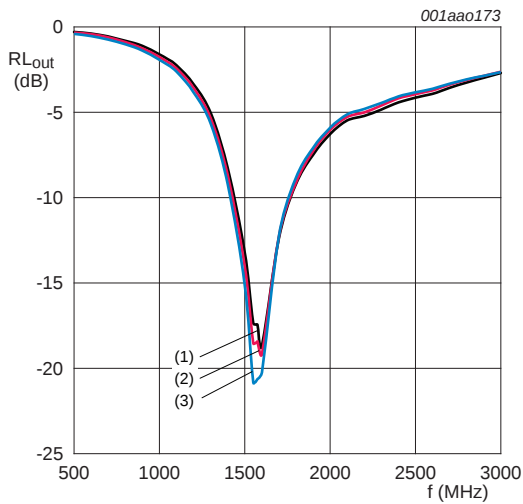

$V_{CC} = 1.8$ V; $P_i = -45$ dBm.

- (1) $T_{amb} = -40$ °C
- (2) $T_{amb} = +25$ °C
- (3) $T_{amb} = +85$ °C


Fig 17. Output return loss as a function of frequency; typical values

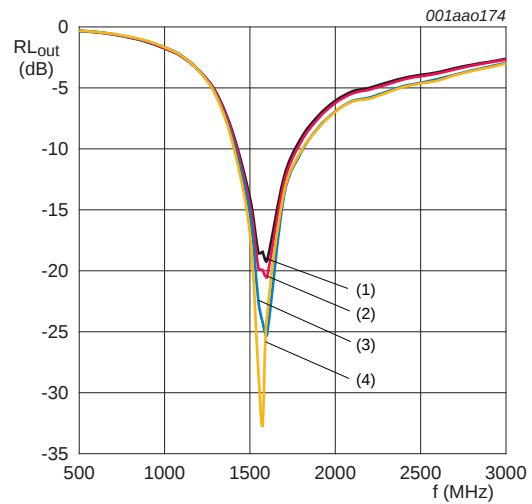

$V_{CC} = 1.8$ V; $T_{amb} = 25$ °C.

- (1) $P_i = -45$ dBm
- (2) $P_i = -30$ dBm
- (3) $P_i = -20$ dBm
- (4) $P_i = -15$ dBm


Fig 18. Output return loss as a function of frequency; typical values

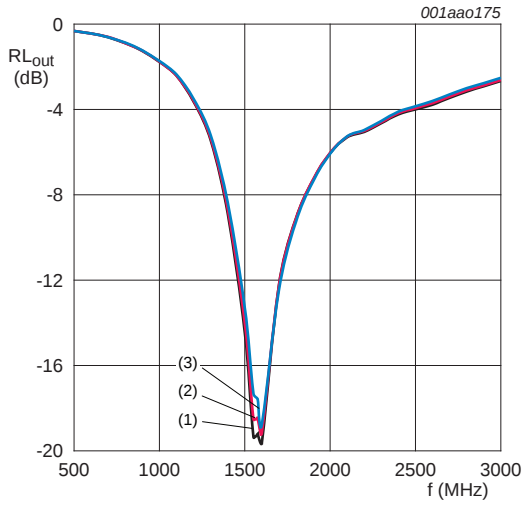

$P_i = -45$ dBm; $T_{amb} = 25$ °C.

- (1) $V_{CC} = 1.5$ V
- (2) $V_{CC} = 1.8$ V
- (3) $V_{CC} = 2.85$ V


Fig 19. Output return loss as a function of frequency; typical values

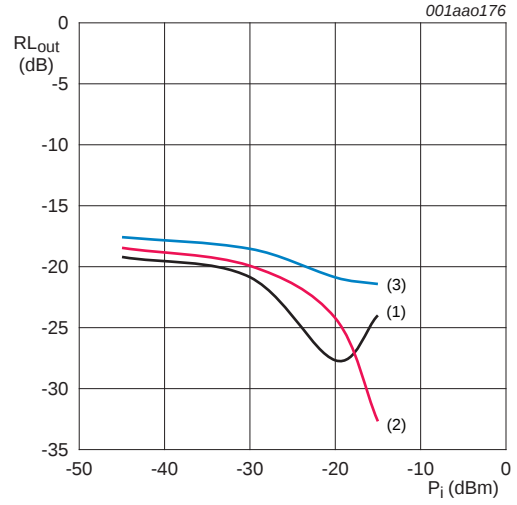

$T_{amb} = 25$ °C; $f = 1575$ MHz.

- (1) $V_{CC} = 1.5$ V
- (2) $V_{CC} = 1.8$ V
- (3) $V_{CC} = 2.85$ V


Fig 20. Output return loss as a function of input power; typical values

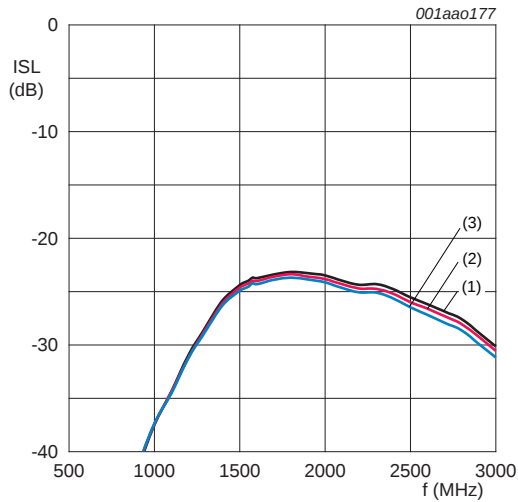

$V_{CC} = 1.8$ V; $P_i = -45$ dBm.

- (1) $T_{amb} = -40$ °C
- (2) $T_{amb} = +25$ °C
- (3) $T_{amb} = +85$ °C


Fig 21. Isolation as a function of frequency; typical values

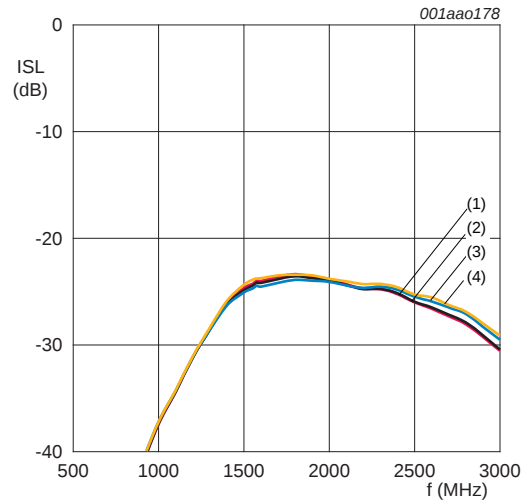

$V_{CC} = 1.8$ V; $T_{amb} = 25$ °C.

- (1) $P_i = -45$ dBm
- (2) $P_i = -30$ dBm
- (3) $P_i = -20$ dBm
- (4) $P_i = -15$ dBm


Fig 22. Isolation as a function of frequency; typical values

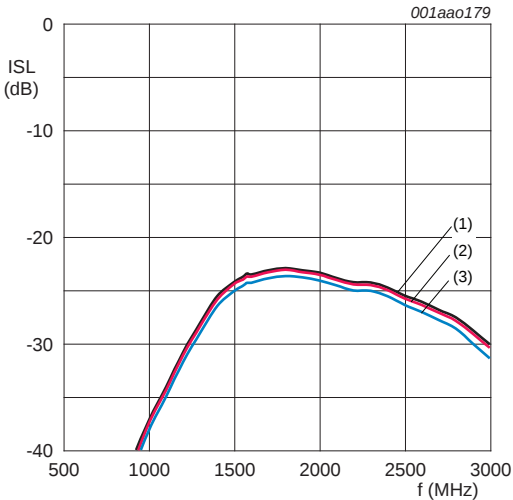

$P_i = -45 \text{ dBm}$; $T_{\text{amb}} = 25 \text{ }^{\circ}\text{C}$.

- (1) $V_{\text{CC}} = 1.5 \text{ V}$
- (2) $V_{\text{CC}} = 1.8 \text{ V}$
- (3) $V_{\text{CC}} = 2.85 \text{ V}$


Fig 23. Isolation as a function of frequency; typical values

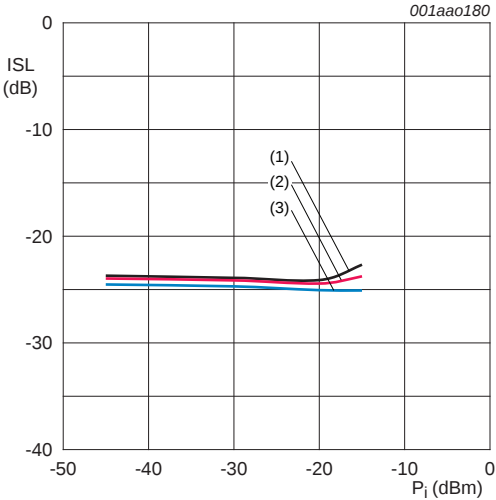

$T_{\text{amb}} = 25 \text{ }^{\circ}\text{C}$; $f = 1575 \text{ MHz}$.

- (1) $V_{\text{CC}} = 1.5 \text{ V}$
- (2) $V_{\text{CC}} = 1.8 \text{ V}$
- (3) $V_{\text{CC}} = 2.85 \text{ V}$


Fig 24. Isolation as a function of input power; typical values

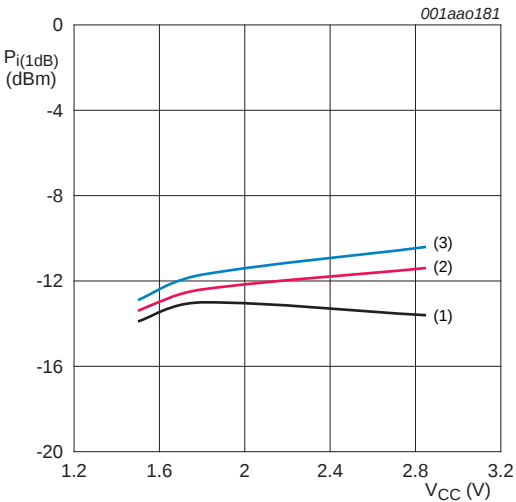

$f = 1575 \text{ MHz}$.

- (1) $T_{\text{amb}} = -40 \text{ }^{\circ}\text{C}$
- (2) $T_{\text{amb}} = +25 \text{ }^{\circ}\text{C}$
- (3) $T_{\text{amb}} = +85 \text{ }^{\circ}\text{C}$


Fig 25. Input power at 1 dB gain compression as a function of supply voltage; typical values

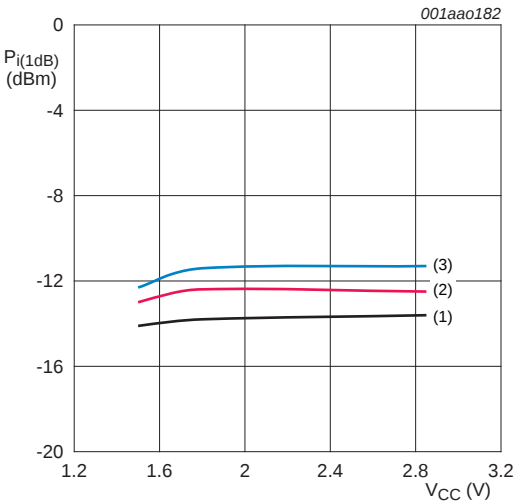

$f = 850 \text{ MHz}$.

- (1) $T_{\text{amb}} = -40 \text{ }^{\circ}\text{C}$
- (2) $T_{\text{amb}} = +25 \text{ }^{\circ}\text{C}$
- (3) $T_{\text{amb}} = +85 \text{ }^{\circ}\text{C}$

Fig 26. Input power at 1 dB gain compression as a function of supply voltage; typical values

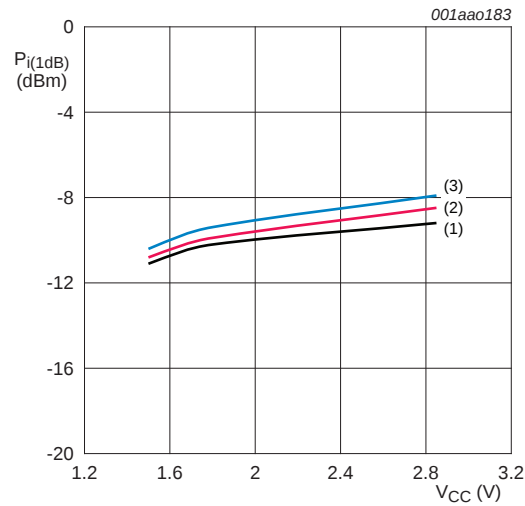


$f = 1850 \text{ MHz}$.

(1) $T_{\text{amb}} = -40 \text{ }^{\circ}\text{C}$

(2) $T_{\text{amb}} = +25 \text{ }^{\circ}\text{C}$

(3) $T_{\text{amb}} = +85 \text{ }^{\circ}\text{C}$

Fig 27. Input power at 1 dB gain compression as a function of supply voltage; typical values

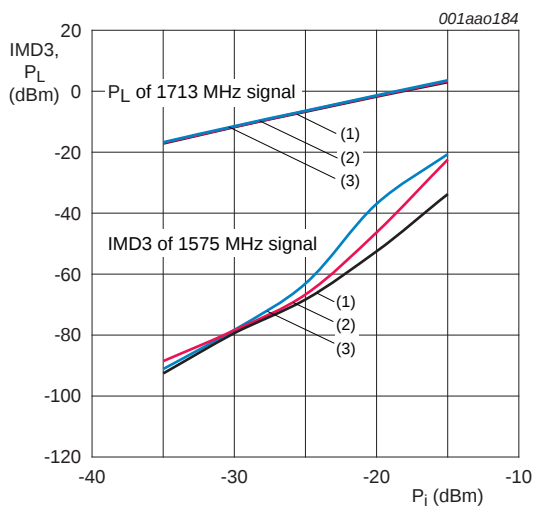


$f = 1575 \text{ MHz}$; $f_1 = 1713 \text{ MHz}$; $f_2 = 1851 \text{ MHz}$;
 $T_{\text{amb}} = 25 \text{ }^{\circ}\text{C}$.

(1) $V_{\text{CC}} = 1.5 \text{ V}$

(2) $V_{\text{CC}} = 1.8 \text{ V}$

(3) $V_{\text{CC}} = 2.85 \text{ V}$

Fig 28. Third order intermodulation distortion and output power as function of input power; typical values

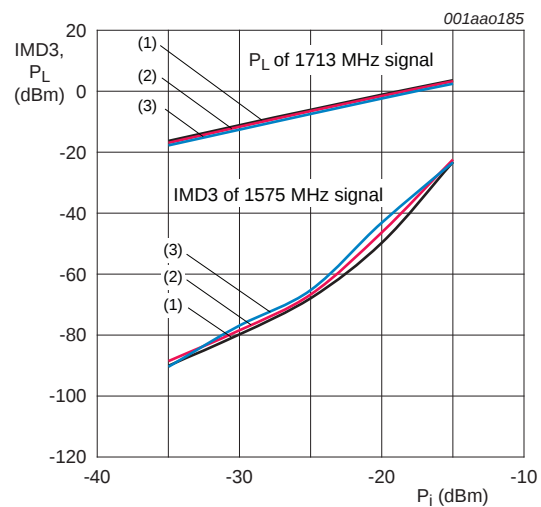


$f = 1575 \text{ MHz}$; $f_1 = 1713 \text{ MHz}$; $f_2 = 1851 \text{ MHz}$;
 $V_{\text{CC}} = 1.8 \text{ V}$.

(1) $T_{\text{amb}} = -40 \text{ }^{\circ}\text{C}$

(2) $T_{\text{amb}} = +25 \text{ }^{\circ}\text{C}$

(3) $T_{\text{amb}} = +85 \text{ }^{\circ}\text{C}$

Fig 29. Third order intermodulation distortion and output power as function of input power; typical values

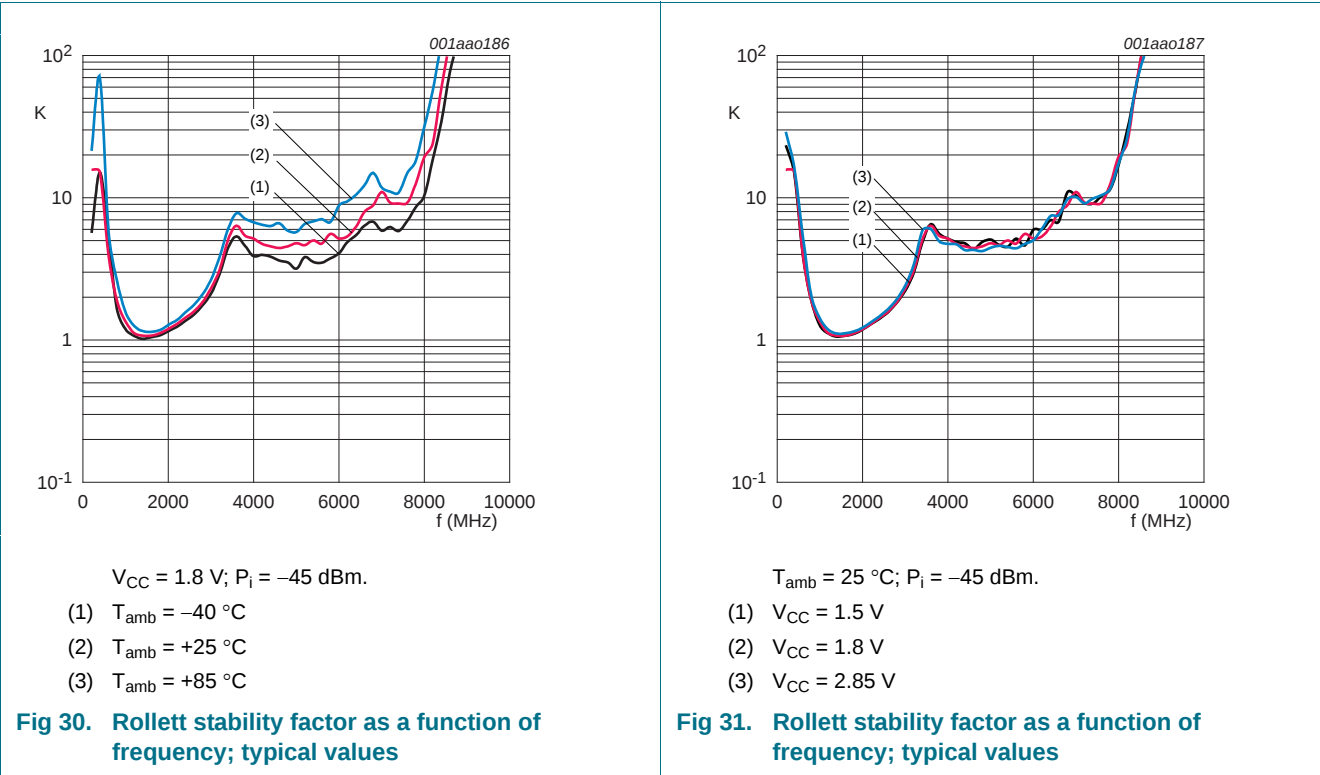

9. Package outline

XSON6: plastic extremely thin small outline package; no leads; 6 terminals; body 1 x 1.45 x 0.5 mm SOT886

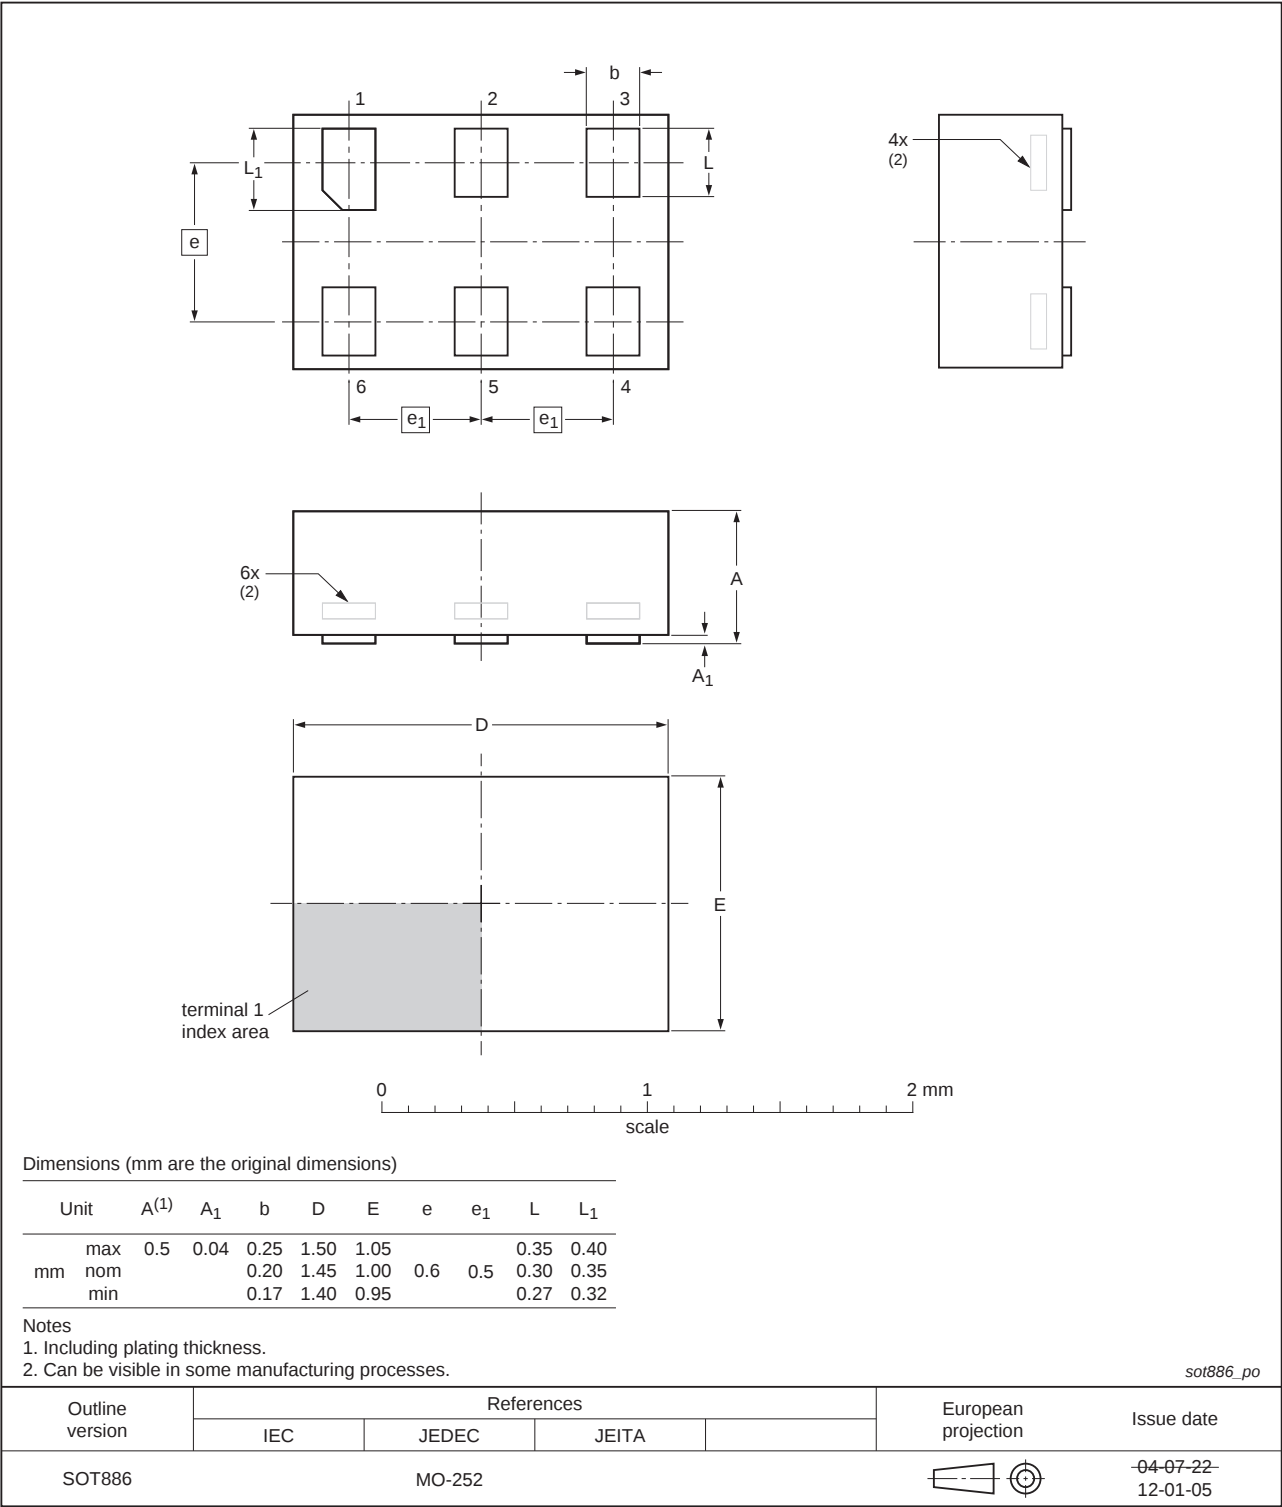


Fig 32. Package outline SOT886 (XSON6)

10. Abbreviations

Table 10. Abbreviations

Acronym	Description
AC	Alternating Current
ATM	Automated Teller Machine (cash dispenser)
DC	Direct Current
GLONASS	GLObal NAVigation Satellite System
GNSS	Global Navigation Satellite System
GPS	Global Positioning System
HBM	Human Body Model
MMIC	Monolithic Microwave Integrated Circuit
PC	Personal Computer
PCB	Printed Circuit Board
RF	Radio Frequency
SiGe:C	Silicon Germanium Carbon

11. Revision history

Table 11. Revision history

Document ID	Release date	Data sheet status	Change notice	Supersedes
BGU7007 v.4	20170118	Product data sheet	-	BGU7007 v.3
Modifications:	Section 1: added GPS1102M according to our new naming convention			
BGU7007 v.3	<td>	Product data sheet	-	BGU7007 v.2
Modifications:	- Added 'Compass' to descriptive title and to Section 1.3 on page 2 Section 1.2 on page 1: row 6, changed 2.8.5 V to 3.1 V Table 1 on page 2, Table 7 on page 4 and Table 8 on page 5: changed value V_{CC} from 2.85 V to 3.1 V Table 5 on page 3: Several additions and changes			
BGU7007 v.2	20111103	Product data sheet	-	BGU7007 v.1
BGU7007 v.1	20110520	Product data sheet	-	-