

S500

5 mm x 20 mm Fast-acting glass tube fuses

RoHS



Product features

- Fast-acting, low breaking capacity
- Optional axial leads available
- 5 mm x 20 mm physical size
- Glass tube with silver-plated (32-125 mA) and nickel-plated (160 mA-10 A) endcaps
- Designed to IEC 60127-2 (160 mA-10 A)

| Electrical Characteristics | | | | | | | |
|----------------------------|------------------|------------------|-------------------|-------|----------------|--------|-----------------|
| I_n | 1.5 I_n min | 2.1 I_n max | 2.75 I_n min | max | 4 I_n min | max | 10 I_n max |
| 32mA-125mA | 60 min | 30 min | – | – | – | – | – |
| 160mA-6.3A | 60 min | 30 min | 50 ms | 2 sec | 10 ms | 300 ms | 20 ms |
| 8A-10A | 30 min | 30 min | 50 ms | 2 sec | 10 ms | 400 ms | 40 ms |

Agency information

- cURus: File E19180, Guide JDYX2, JDYX8
- CSA Component Acceptance: File 1803366
- SEMKO Approval: File 414552
- VDE Approval: File 40014109
- BSI Approval: File KM55676
- IMQ Approval: File CA03.00097
- CCC Approval: File 2005010207155694

Ordering information

- Specify product code
- Insert packaging code prefix before part number. E.g. BK/S500-32-R
- Ratings above 6.3 A have a 0.8 mm diameter lead (axial lead)
- Specify option code if desired
- For axial leads, insert "V" between catalog series and amp rating. E.g. S500-V-100-R

| Specifications | | | | | | | | | | | | |
|----------------|--------------------|--------------------------------------------------------|---------------------------------|------------------------------------|----------------------------|------------------|-----|-----|-----|-----|-------|-----|
| Part Number | Voltage Rating Vac | Interrupting Rating (amps) at Rated Voltage (50Hz) Vac | Typical DC Cold Resistance (Ω)* | Typical Melting I [†] AC† | Maximum Voltage Drop (mV)‡ | Agency Approvals | | | | | | |
| | | | | | | cURus | CSA | CCC | BSI | VDE | SEMKO | IMQ |
| S500-32-R | 250 | 35 | 40 | 0.000047 | 3200 | | | | | | | |
| S500-40-R | 250 | 35 | 25 | 0.00011 | 2500 | | | | | | | |
| S500-50-R | 250 | 35 | 17 | 0.00020 | 2400 | | | | | | | |
| S500-63-R | 250 | 35 | 125 | 0.00057 | 2000 | | | | | | | |
| S500-80-R | 250 | 35 | 5.0 | 0.0012 | 1200 | | | | | | | |
| S500-100-R | 250 | 35 | 3.8 | 0.003 | 1100 | | | | | | | |
| S500-125-R | 250 | 35 | 2.8 | 0.005 | 1000 | | | | | | | |
| S500-160-R | 250 | 35 | 9.1 | 0.008 | 2000 | X | X | X | X | X | X | X |
| S500-200-R | 250 | 35 | 6.8 | 0.016 | 1700 | X | X | X | X | X | X | X |
| S500-250-R | 250 | 35 | 4.3 | 0.28 | 1400 | X | X | X | X | X | X | X |
| S500-315-R | 250 | 35 | 3.1 | 0.58 | 1300 | X | X | X | X | X | X | X |
| S500-400-R | 250 | 35 | 2.0 | 0.18 | 1100 | X | X | X | X | X | X | X |
| S500-500-R | 250 | 35 | 0.26 | 0.18 | 220 | X | X | X | X | X | X | X |
| S500-630-R | 250 | 35 | 0.20 | 0.35 | 220 | X | X | X | X | X | X | X |
| S500-800-R | 250 | 35 | 0.14 | 0.67 | 190 | X | X | X | X | X | X | X |
| S500-1-R | 250 | 35 | 0.125 | 0.60 | 200 | X | X | X | X | X | X | X |
| S500-1.25-R | 250 | 35 | 0.096 | 0.84 | 200 | X | X | X | X | X | X | X |
| S500-1.6-R | 250 | 35 | 0.066 | 1.6 | 190 | X | X | X | X | X | X | X |
| S500-2-R | 250 | 35 | 0.043 | 4.2 | 150 | X | X | X | X | X | X | X |
| S500-2.5-R | 250 | 35 | 0.034 | 6.1 | 150 | X | X | X | X | X | X | X |
| S500-3.15-R | 250 | 35 | 0.025 | 13 | 130 | X | X | X | X | X | X | X |
| S500-4-R | 250 | 40 | 0.021 | 22 | 130 | X | X | X | X | X | X | X |
| S500-5-R | 250 | 50 | 0.014 | 42 | 120 | X | X | X | X | X | X | X |
| S500-6.3-R | 250 | 63 | 0.010 | 69 | 120 | X | X | X | X | X | X | X |
| S500-8-R | 250 | 80 | 0.010 | N/A | 120 | X | X | | X | X | X | |
| S500-10-R | 250 | 100 | 0.008 | N/A | 120 | X | X | | X | X | X | |


* DC Cold Resistance (Measured at <10% of rated current)

† Typical Melting I[†] t (I[†] was measured at listed interrupting rating and rated voltage)


‡ Maximum Voltage Drop (Voltage drop was measured at +20 °C ambient temperature at rated current)

Powering Business Worldwide

Dimensions - mm
Drawing Not to Scale



Time-current Curve

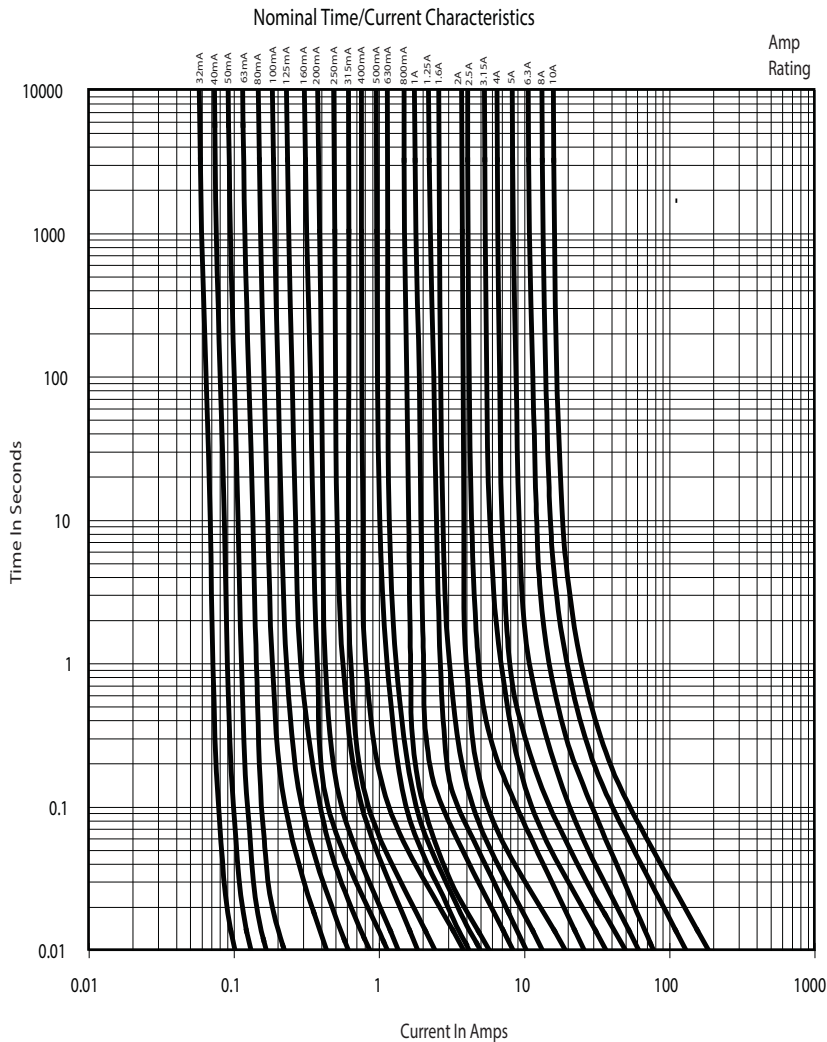

| Packaging Code | |
|------------------|------------------------------------------|
| Packaging Prefix | Description |
| BK | 100 fuses packed into a cardboard carton |
| BK1* | 1,000 fuses packed into a poly bag |

* Not available for axial lead version

| Option Code | |
|-------------|-------------------------------------------------------------------|
| Option Code | Description |
| V | Axial leads - copper tinned wire with nickel plated brass endcaps |

Life Support Policy: Eaton does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin.

Eaton
Electronics Division
1000 Eaton Boulevard
Cleveland, OH 44122
United States
eaton.com/electronics

© 2019 Eaton
All Rights Reserved
Printed in USA
Publication No. 2052 BU-SB08761
August 2019

Eaton is a registered trademark.

All other trademarks are property
of their respective owners.

Follow us on social media to get the
latest product and support information.

