


Breakout Board for XBee Module

Número de parte: BOB08276

This is a simple breakout board for the popular XBee product from Digi. This board breaks out all 20 pins of the XBee to a 0.1" standard spacing dual row header. The spacing between 0.1" headers is 0.5" making it breadboard DIP friendly. We highly recommend using the female sockets to avoid having to solder the XBee permanently to the breakout board. This is the PCB only. Please order the accompanying 2mm sockets (you'll need 2!) and 0.1" headers below.

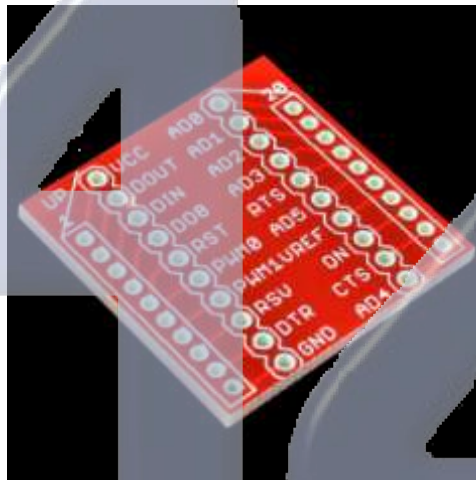

Datasheet:

- 5V Interface to 3V XBee module
- X-CTU Software

AG Electrónica S.A. de C.V.

 AG Electrónica S.A. de C.V. República del Salvador N° 20 Segundo Piso Teléfono: 5130 - 7210			
Acotación: NA	http://www.agelectronica.com	Escala	Rev 1. MAUM
			Rev 2.
Tolerancia: NA	Descripción: Breakout Board for XBee Module		
Tolerancia: NA	Fecha: 15 /11/2013	Número de parte: BOB08276	