



MODEL: BT12-BS (YTX12-BS) VALVE REGULATED LEAD ACID BATTERY

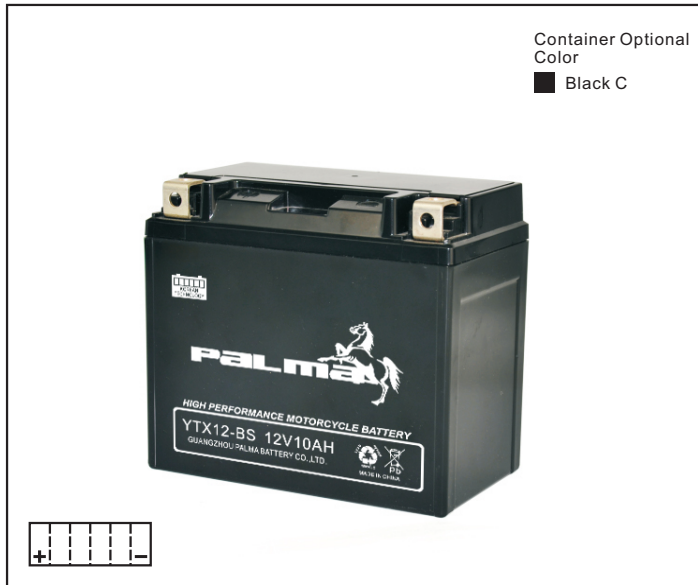

Plane Chart:

Unit:(mm) Terminal type:(Z1)

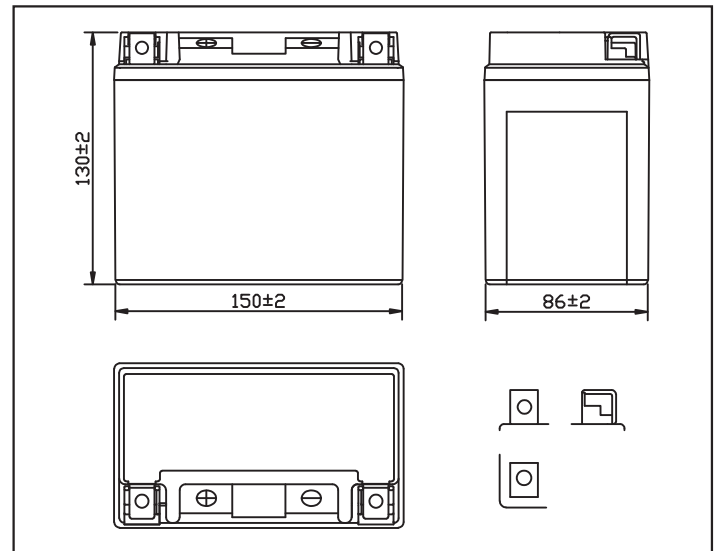

Parts:


Executed Standard: JISD 5302-2004

Cover	Container Bottom	Terminal	Positive Plate	Negative Plate	Separator	Electrolyte	Safety Valve	Seal Glue
ABS	ABS	Pb	PbO ₂	Pb	AGM	dilute sulphuric acid	Rubber	Epoxy Resin


Parameter Chart:

Volts		12V	
Capacity (25°C)		10 hours rate	10Ah
Appx.Dimension (mm)	L±2		150
	W±2		86
	H±2		130
Storage Status		Wet	
Weight (Approx)		3.82Kg	
Retention of Charge Storage @25 °C			
1 month	97%	Directly Mounted	
3 month	90%	Directly Mounted	
6 month	80%	Constant Volts:14.4V Limit Current:2.4A Charging Hours:2-3H	
12 month	40%	Constant Volts:14.4V Limit Current:2.4A Charging Hours:4-6H	
CCA		Factory Standard (-10°C)	Factory Standard (-18°C)
Discharging Current		100A	140A

Discharge Current 25°C

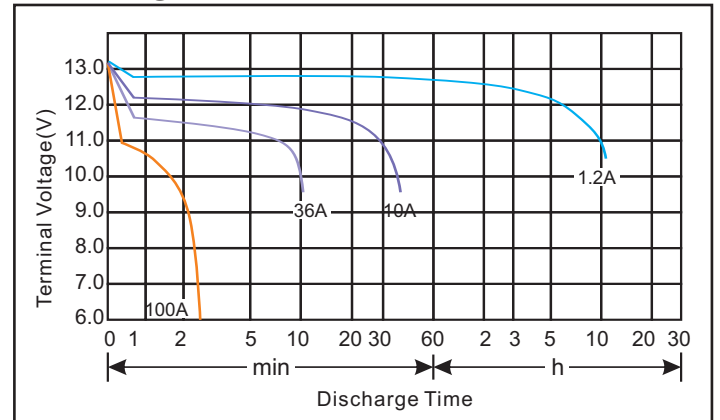

Residual Capacity

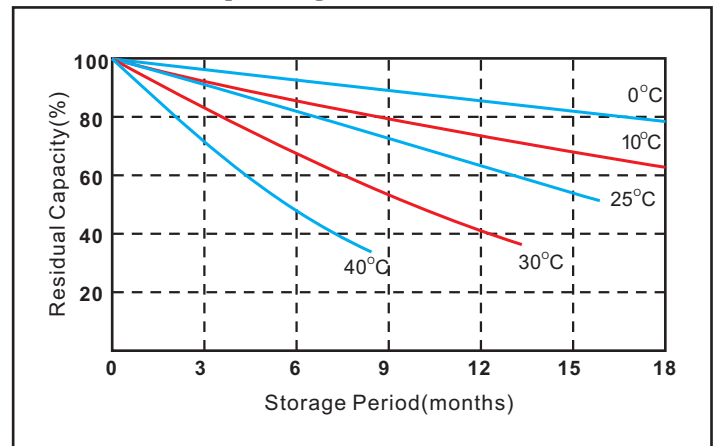

★The above are average and data obtained from the first 3 charge/discharge cycles. These are not minimum values.

★The different item No. of battery can be developed according to the customer's demand.