

MODEL: BT7L-BS (YTX7L-BS)


VALVE REGULATED LEAD ACID BATTERY

Container Optional
Color
■ Black C



Plane Chart:

Unit:(mm) Terminal type:(C3)

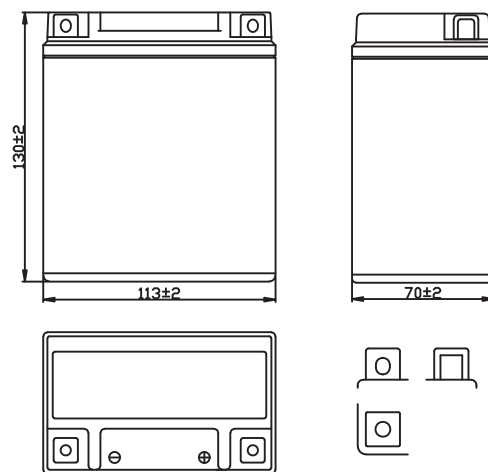

Parts:


Executed Standard JISD 5302 -2004

Cover	Container Bottom	Terminal	Positive Plate	Negative Plate	Separator	Electrolyte	Safety Valve	Seal Glue
ABS	ABS	Pb	PbO ₂	Pb	AGM	dilute sulphuric acid	Rubber	Epoxy Resin


Parameter Chart:

Volts		12V	
Capacity (25°C)		10 hours rate	6Ah
Appx.Dimension (mm)		L±2	113
		W±2	70
		H±2	132
Storage Status		Wet	
Weight (Approx)		2.20Kg	
Retention of Charge Storage @25 °C			
1 month	97%	Directly Mounted	
3 month	90%	Directly Mounted	
6 month	80%	Constant Volts:14.4V Limit Current:1.4A Charging Hours:2-3H	
12 month	40%	Constant Volts:14.4V Limit Current:1.4A Charging Hours:4-6H	
CCA		Factory Standard (-10° C)	Factory Standard (-18° C)
Discharging Current		50A	75A

Discharge Current 25°C

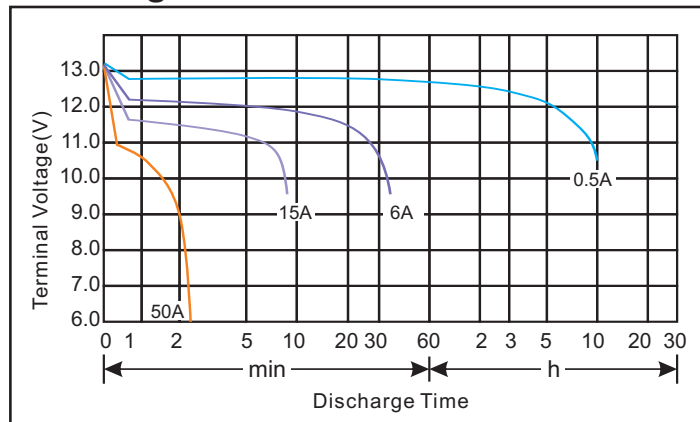

Residual Capacity

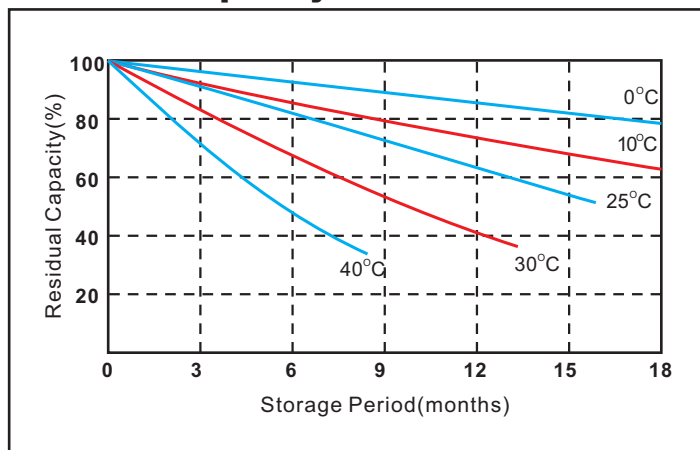

★The above are average and data obtained from the first 3 charge/discharge cycles. These are not minimum values.

★The different item No. of battery can be developed according to the customer's demand.