

MICRO SWITCH

A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
FREDERICK, ILLINOIS

FED. MFR. CODE 91929

SWITCH - BASIC

CATALOG LISTING
BZ-2RW8024

DRAWING NUMBER
BZ-2RW8024

PAGE 1 OF 1

REPLACES X113952-BZ

RELEASE NO. 204148

M

ISSUE
1

CHECK

REVISIONS

CHECK

11OCT01

SAV


CHECK

11OCT01

JLH

DRAWN

RASTER
FO-50378

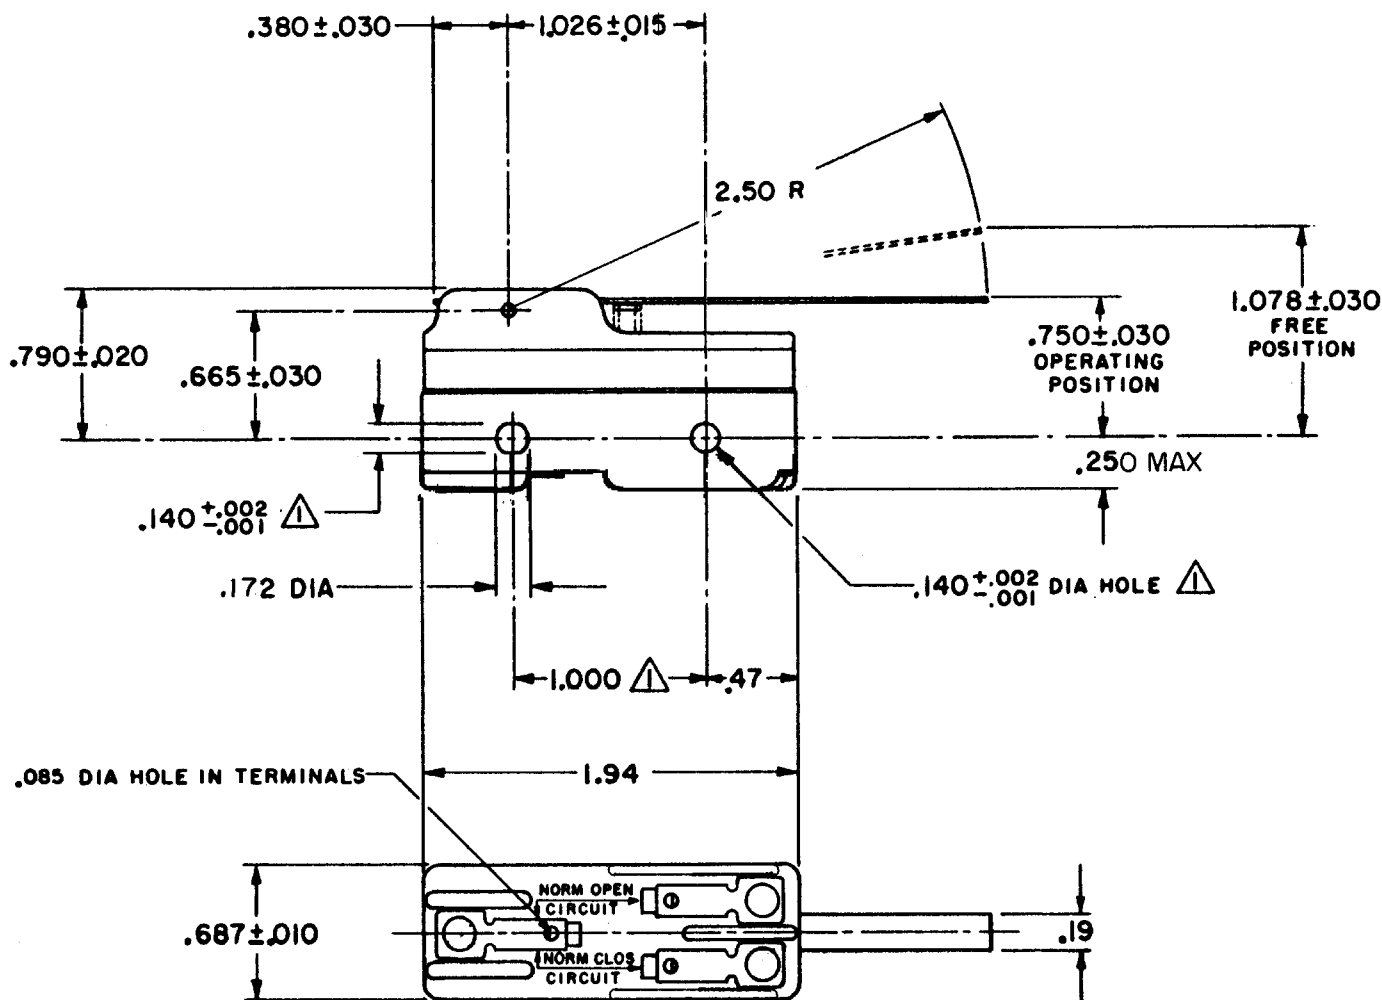

NOTE
 ⚠ MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
 OF .139 MAX DIA ON 1.000 ± .002 CENTERS.
 2 - SWITCH WILL WITHSTAND TEMPERATURE OF 250°F

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS		ELECTRICAL DATA		SCALE FULL	
OPERATING FORCE----- 2 1/2 OZ MAX		CONTACT ARRANGEMENT S P D T		DO NOT SCALE PRINT	
RELEASE FORCE-----1/2 OZ MIN		UNDERWRITERS' LAB. INC. LISTED RATING		UNLESS OTHERWISE SPECIFIED	
DIFFERENTIAL TRAVEL-----,007-.050		-L96- 15A-125, 250, OR 480 VAC		DIMENSIONS ARE IN INCHES	
OVERTRAVEL-----,219 MIN		1/2 A-125 VDC; 1/4 A-250 VDC		TOLERANCES ARE:	
		1/8 HP-125 VAC; 1/4 HP-250 VAC		ONE PLACE (.0) ±.030	
		-L288- -L299- -L306-		TWO PLACE (.00) ±.015	
		CE D SP		THREE PLACE (.000) ±.005	
		16A 250V ~ T85 5E4		ANGLES ±	
				WEIGHT .060 LB	