

Sr. No.	Capacitance	Voltage	L	B	H
1	25	250	58	28	40

- Performance parameters(Specification);
- 1.Component:Running Capacitor;
 - 2.Product type:CBB61;
 - 3.Rated Capacitance:See above table;
 - 4.Rated Voltage:See above table;
 - 5.Rated Frequency:50/60Hz;
 - 6.Tolerance of capacitance: $\pm 5\%$ (At 100Hz +25℃);
 - 7.Dissipation factor: $\text{tg}\delta \leq 0.0020$ (At 100Hz +25℃);
 - 8.Operating temperature:-40℃ TO +85℃;
 - 9.Test voltage:Between Terminal and terminal(T-T): $2U_n/2s$;
 - 10.The life level:Class C;
 - 11.Class of safety protection: S0
 - 12.RoHS complicant;
 - 13.Flame Rating:UL94-V0;
 - 14.Related standards:UL810,GB/T3667.1-2016,IEC/EN60252-1;
 - 15.Please according to GB/T1804-m if the tolerance not noted.

MARKING:The contents in the
“□” are variables。

Mascotop[®]

CBB61

25 μF±5%SH


250VAC C 50/60Hz

40/85/21 S0

2026 03

E314635

CBB61-25UF/250V

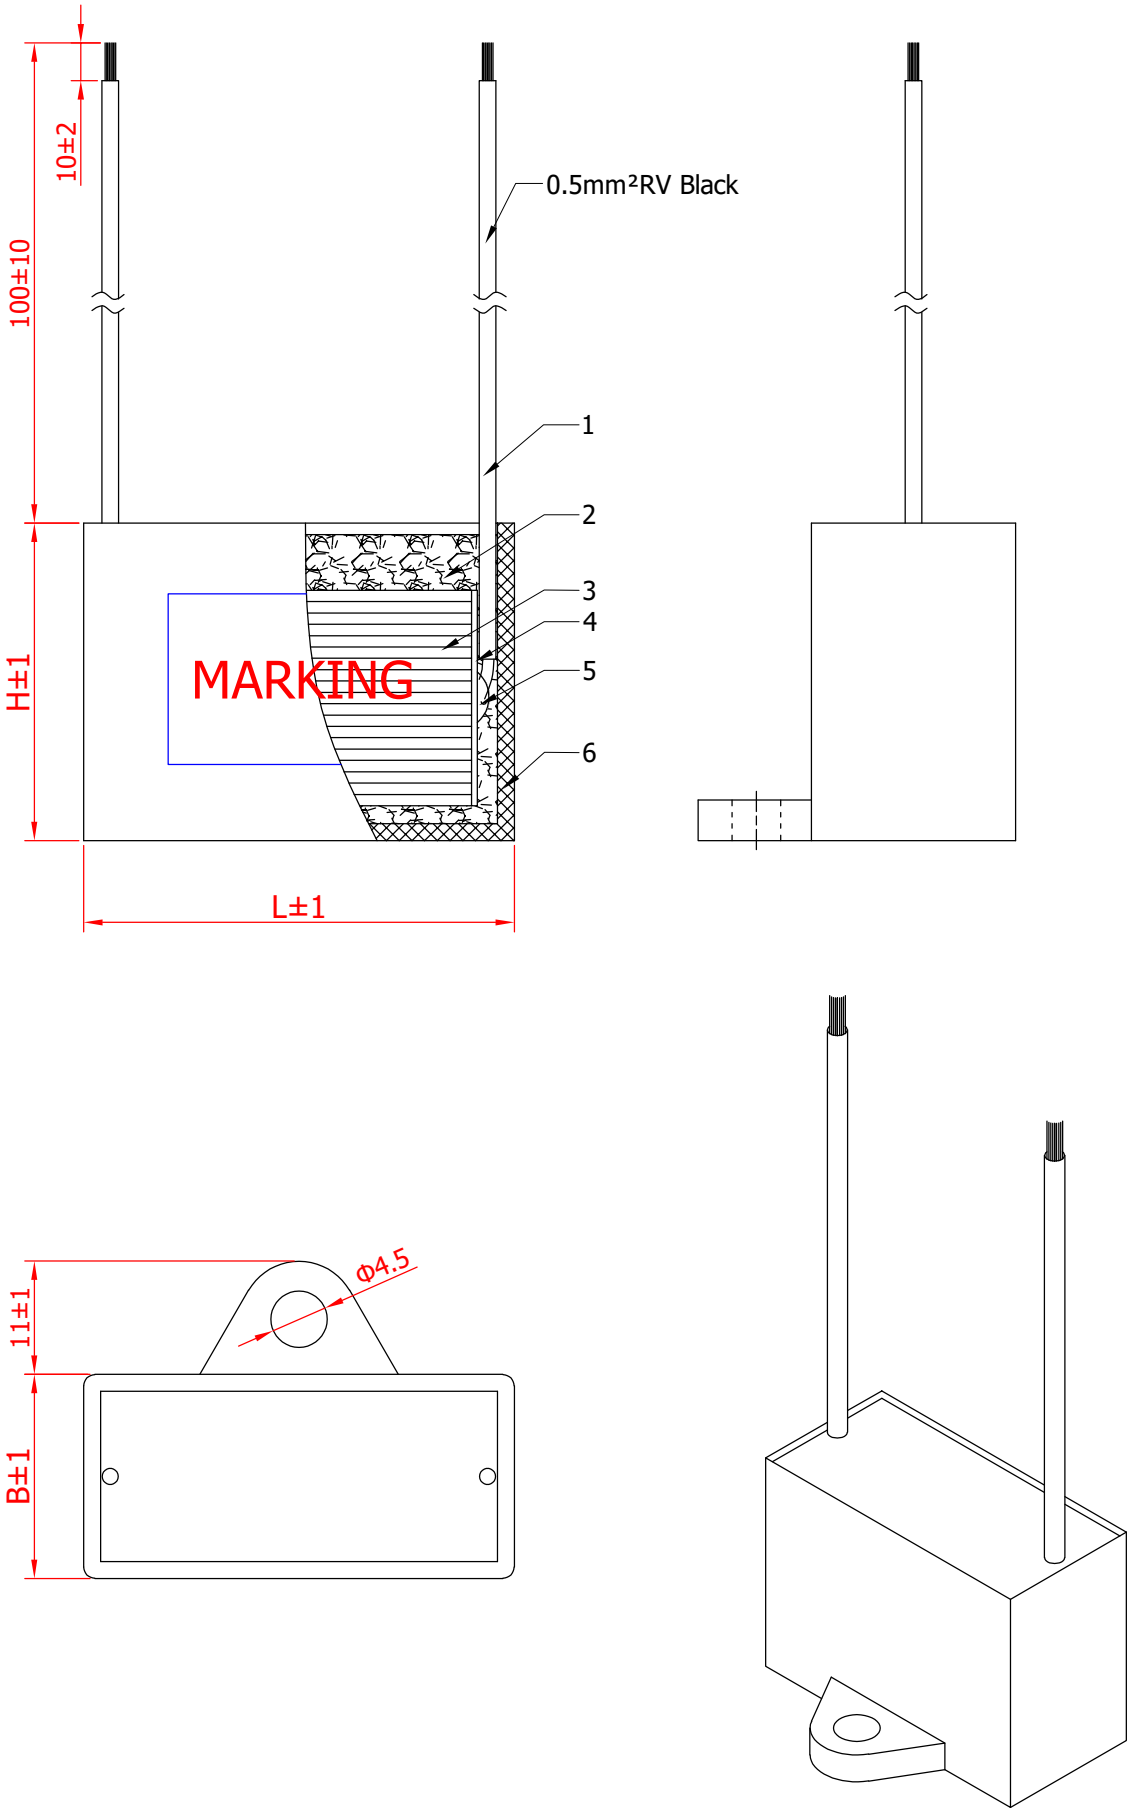

6		Plastic Can		ABS	1	Black
5		Solder joints		Sn		
4		End face		Zn		
3		Element		MPP	1	
2		Filling material		Epoxy		
1		Terminal	0.5mm ² RV		2	Black
No.	Code	Name	Specifications	Material	Quantity	Note
Mark	Revise	Zone	File number	Signature	Y/M/D	
Design	张进	2026.03.29	Standard			
Audit	杨同彬	2026.03.29				
Technical			Approve	王良国	2026.03.29	
Page 1 of 1						

CBB61				Anhui Mascotop Electronic CO.,LTD Engineering Dept.	
				835	
				835.CP.03.002	
Section Mark		Weight	Scale		
		A			