
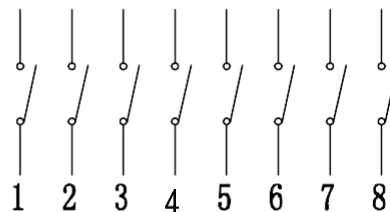
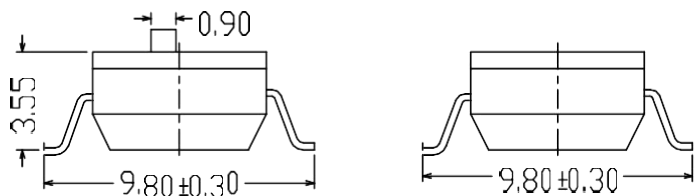


ROHS

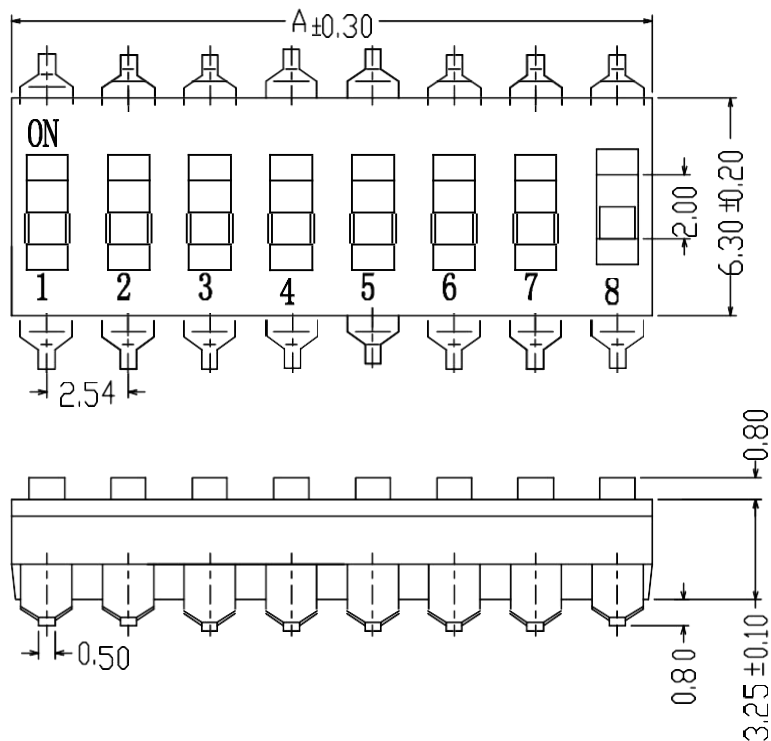

Circuit Diagram

Notes:

A. Electrical Parameters:

1. Rated Current:

At: DC 50V 100mA

At: DC 24V 25mA

2. Insulation Resistance: DC 250V 100M Ω 3. Contact Resistance: 50m Ω max

4. Withstand Voltage: AC 500V 1 minute

5. Service life: 2000 times

6. Operating force: 500gf max

7. Temperature of use: 40° C + 80° C

B. Materials:


1. Switch cover: PPS UL94V-0

2. Switch body: PPS UL94V-0

3. Control lever: PA46 UL94V-0

4. Shrapnel: gold-plated bellium copper

5. Terminal: gold-plated brass

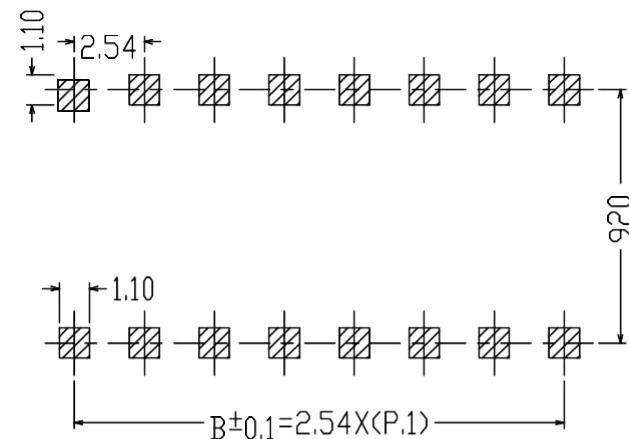

PCB Layout (Pattern Side)

Position	1P	2P	3P	4P	5P	6P	7P	8P	9P	10P	12P
DIM. A	2.54	5.08	7.62	10.16	12.70	15.24	17.78	20.32	22.86	25.40	30.48

APPROVALS		DATE		http://www.dongdudz.com	
DRAW:	ZRD	2017-12-6		TOLERANCE:	ANGLE:
CHECKED:	***	****		30≥	+0.30
APPOVALS:	***	****		10~30	+0.20
				5~10	+0.15
				≤5	+0.10
				±2°	
 东都电子					
DONGDU ELECTRONICS					
MODEL:		DIP SWITCH			
PART NO:		DDU EM			
UNIT :mm		SCALE:1:1			
REV:		A		PAGE:1/1	