


AC 1238(5B)



Dimensions Drawing

Unit:mm

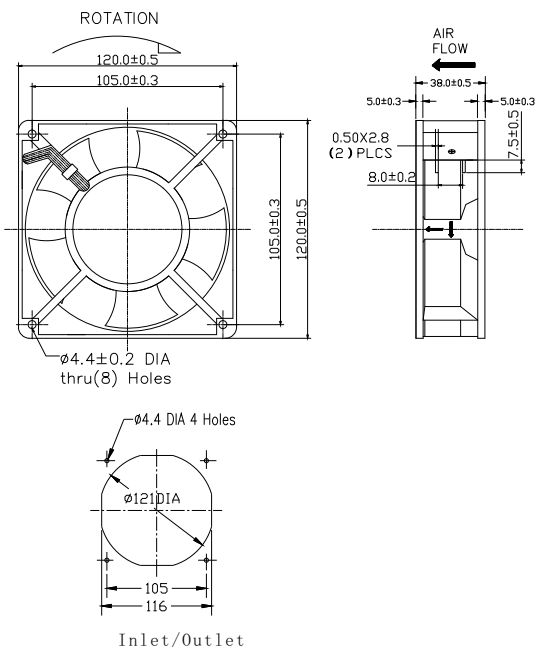

SIZE:

120x120x38mm

construction:

- Die -cast aluminum housing
- Glass fiber reinforced plastic: Impeller are UL 94V-0 rating
- Shaded pole motor
- Impedance protected
- Leader wire or terminal is available

OPERATING TEMPERATURE:


Ball bearing -30°C to +75°C

Sleeve bearing -10°C to +70°C

Specifications

Model	Bearing Type	Rated Voltage	Fre-	Current	Power	Speed	Noise Level	Air Flow		Static Pressure	Weight
		VAC	Hz	A	W	RPM	dBA	M³/min	CFM	mmH₂O	g
HA1238B11H(5B)	Ball	115	50/60	0.22/0.18	21/18	2650/2950	40/45	2.58/3.20	91/113	6.35/7.62	540
HA1238S11H(5B)	Sleeve	115	50/60	0.22/0.18	21/18	2650/2950	40/45	2.58/3.20	91/113	6.35/7.62	540
HA1238B11M(5B)	Ball	115	50/60	0.17/0.15	16/14	2400/2200	37/35	2.1/2.0	75/70	5.6/5.0	540
HA1238S11M(5B)	Sleeve	115	50/60	0.17/0.15	16/14	2400/2200	37/35	2.1/2.0	75/70	5.6/5.0	540
HA1238B11L(5B)	Ball	115	50/60	0.14/0.12	12/10.5	2000/1800	30/29	1.87/1.70	66/60	4.8/4.5	540
HA1238S11L(5B)	Sleeve	115	50/60	0.14/0.12	12/10.5	2000/1800	30/29	1.87/1.70	66/60	4.8/4.5	540
HA1238B22H(5B)	Ball	220~240	50/60	0.12/0.11	21/18	2650/2950	40/45	2.58/3.20	91/113	6.35/7.62	540
HA1238S22H(5B)	Sleeve	220~240	50/60	0.12/0.11	21/18	2650/2950	40/45	2.58/3.20	91/113	6.35/7.62	540
HA1238B22M(5B)	Ball	220~240	50/60	0.09/0.08	16/14	2400/2200	37/35	2.1/2.0	75/70	5.6/5.0	540
HA1238S22M(5B)	Sleeve	220~240	50/60	0.09/0.08	16/14	2400/2200	37/35	2.1/2.0	75/70	5.6/5.0	540
HA1238B22L(5B)	Ball	220~240	50/60	0.08/0.08	12/10.5	2000/1800	30/29	1.87/1.70	66/60	4.8/4.5	540
HA1238S22L(5B)	Sleeve	220~240	50/60	0.08/0.08	12/10.5	2000/1800	30/29	1.87/1.70	66/60	4.8/4.5	540
HA1238B38H(5B)	Ball	380	50	0.07	18	2600	40	2.58	91	6.35	540
HA1238S38H(5B)	Sleeve	380	50	0.07	18	2600	40	2.58	91	6.35	540

Characteristic Curves

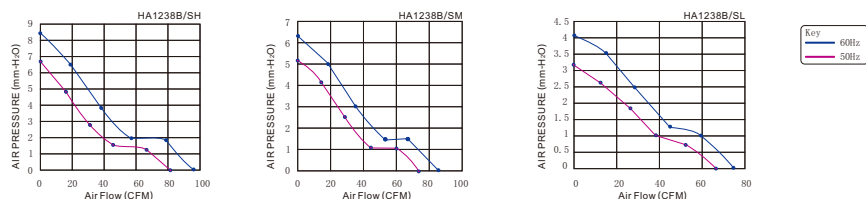

Notes: 1.Specifications subject to change without notice;
2.Design and provide products according to customer requirements.