

DC 9225



SIZE:

92x92x25mm

construction:

Glass Fiber reinforced plastic;

Impeller and housing PBT are UL 94V-0 rating

OPERATING TEMPERATURE:

Sleeve bearing -10°C to +70°C

INSULATION RESISTANCE:


10meg Ohm min, at 500 VDC
(between frame and terminal)

DIELECTRIC STRENGTH:


5mA max, at 500 VAC 60Hz one minute
(between frame and terminal)

Dimensions Drawing

Unit:mm

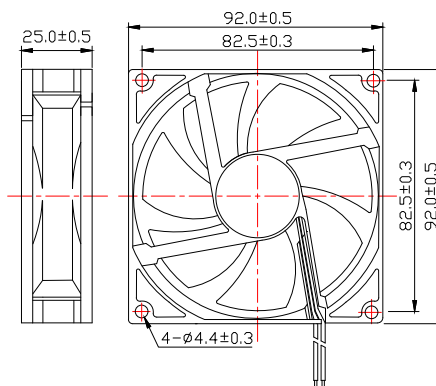

Characteristic Curves

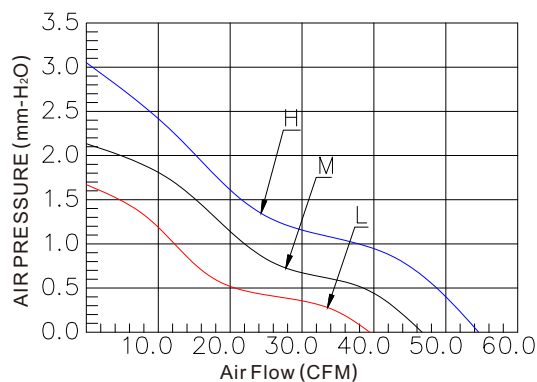

Specifications

Model	Bearing Type	Rated Voltage	Operation Voltage	Current	Speed	Air Flow	Static Pressure	Noise Level	Weight
		VDC	VDC	A	RPM	CFM	mmH ₂ O	dBA	g
HD9225S12H	Sleeve	12	10.8~13.2	0.25	2800	54.73	3.04	32.81	85
HD9225S12M	Sleeve	12	10.8~13.2	0.20	2500	46.46	2.11	28.58	85
HD9225S12L	Sleeve	12	10.8~13.2	0.16	2000	39.87	1.67	25.87	85
HD9225B12H	Ball	12	10.8~13.2	0.25	2800	54.73	3.04	32.81	85
HD9225B12M	Ball	12	10.8~13.2	0.20	2500	46.46	2.11	28.58	85
HD9225B12L	Ball	12	10.8~13.2	0.16	2000	39.87	1.67	25.87	85
HD9225S24H	Sleeve	24	21.6~26.4	0.15	2800	54.73	3.04	32.81	85
HD9225S24M	Sleeve	24	21.6~26.4	0.10	2500	46.46	2.11	28.58	85
HD9225S24L	Sleeve	24	21.6~26.4	0.07	2000	39.87	1.67	25.87	85
HD9225B24H	Ball	24	21.6~26.4	0.15	2800	54.73	3.04	32.81	85
HD9225B24M	Ball	24	21.6~26.4	0.10	2500	46.46	2.11	28.58	85
HD9225B24L	Ball	24	21.6~26.4	0.07	2000	39.87	1.67	25.87	85