



**HD9.6-4.0(9.6V4.0Ah)  
LiFePO4 Battery Pack Specification**

DOC NO. : HD/PK23-0701-1

REV :          A2.0

PAGE:   1   of   6  

DATE:   2024-01-27  

# LiFePO4 Battery Pack Specification

Model No: HD9.6-4.0(9.6V4.0Ah)

| Designed | Checked   | Approved   |
|----------|-----------|------------|
| Tian Gao | Yehao Han | Anson Zhao |



**HD9.6-4.0(9.6V4.0Ah)  
LiFePO4 Battery Pack Specification**

DOC NO. : HD/PK23-0701-1

REV :          A2.0

PAGE:   2   of   6  

DATE:   2024-01-27  

**CONTENT**

|                                      |   |
|--------------------------------------|---|
| 1. Preface.....                      | 3 |
| 2. Product and Model.....            | 3 |
| 3. Battery Pack Specifications ..... | 4 |
| 4. Standard Test Conditions.....     | 4 |
| 5. Characteristics .....             | 5 |
| 6.Characteristics Curve.....         | 5 |
| 7. Cautions.....                     | 6 |



# HD9.6-4.0(9.6V4.0Ah) LiFePO4 Battery Pack Specification

DOC NO. : HD/PK23-0701-1

REV : A2.0

PAGE: 3 of 6

DATE: 2024-01-27

## 1. Preface

This specification describes the type and size, performance, technical characteristics, warning and caution of the HD9.6-4.0(9.6V4.0Ah) LiFePO4 rechargeable battery pack. The specification only applies to HD9.6-4.0(9.6V4.0Ah) LiFePO4 rechargeable battery pack supplied by Haidi Energy Technology Co.,Ltd.

## 2. Product and Model

2.1 Product: HD9.6-4.0(9.6V4.0Ah) LiFePO4 Battery Pack

2.2 System Configuration:

Standard pack:HD26650-3.2V-4000mAH-3.2V-3S1P



|                  |          |  |
|------------------|----------|--|
| Charge/Discharge | Positive | UL1007 20AWG 100+10mm<br>Connector:Molex-430250200 |
|                  | Negative |  |



## HD9.6-4.0(9.6V4.0Ah) LiFePO4 Battery Pack Specification

DOC NO. : HD/PK23-0701-1REV : A2.0PAGE: 4 of 6DATE: 2024-01-27

### 3. Battery Pack Specifications

| Items                            | Standard   | Comments   |
|----------------------------------|--|--|
| Nominal voltage                  | 9.6V   | 3S   |
| Typical capacity                 | 4.0Ah  | At 0.2C discharge rate   |
| Max continuous discharge current | 5A   |  |
| Discharge cut-off voltage        | About 7.5V   |  |
| Charge input voltage             | 10.95±0.05V  | Charge mode: CC/CV , Use a constant current, constant voltage(CC/CV)   |
| Charge current                   | ≤5A  |  |
| Inner resistance                 | ≤110mΩ   | Between positive and negative polar  |
| Operation temperature range      | Charge/ Discharge  | 0°C ~ +45°C/-20°C ~ +60°C  |
|                                  | Discharge  | When the environment temperature is higher than 45°C , please pay attention to ventilation and heat rejection. |
| Storage temperature range        | 0°C ~ 40°C<br>( Capacity 80% )   | Recommended long-term storage temperature is 15~25°C   |
| Humidity                         | 5%≤RH≤85%  |  |
| Cabinet Material                 | PVC  |  |
| Total Weight                     | 0.30±0.02Kg  |  |
| Size ( L*W*H )                   | ≤74*58*56mm  |  |
| Protection function              | Over charge protection、 Over discharge protection、 Over current protection、 Short circuit protection , Temperature protection. |  |

### 4. Standard Test Conditions

All test in this specification should be in standard atmospheric conditions: temperature:



## HD9.6-4.0(9.6V4.0Ah) LiFePO4 Battery Pack Specification

DOC NO. : HD/PK23-0701-1

REV : A2.0

PAGE: 5 of 6

DATE: 2024-01-27

25± 5°C, relative humidity: 65±20%.

### 5. Characteristics

#### 5.1 Standard charge

Charge the battery with the Battery special test cabinet, supply 10.95 voltage, constant-current 0.2C(A) current until current down to 0.02C ( A ) .

#### 5.2 Standard discharge

Discharge the battery at 0.2C ( A ) to 7.5 V or battery cut off voltage.

#### 5.3 Electrical Performance

| Test Items              | Test Methods  | Test Standards  |
|-------------------------|---|---|
| Capacity retention rate | After standard charge under 5.1 specified conditions, store the cells for 28 days, then discharge at 0.2C ( A ) to cut-off voltage. | Capacity retention rate≥80%   |
| Cycle Life              | 1) Standard charge at 0.2C ( A ) ,<br>2) Rest 0.5~1 h<br>3) Discharge at 0.2C to cut off voltage<br>4) Capacity retention rate≥80%  | >2000cycles @ 100% DOD;<br>>3000cycles @ 90% DOD;<br>>4000cycles @ 80% DOD; |



## HD9.6-4.0(9.6V4.0Ah) LiFePO4 Battery Pack Specification


DOC NO. : HD/PK23-0701-1

REV : A2.0

PAGE: 6 of 6

DATE: 2024-01-27

### 6.Characteristics Curve

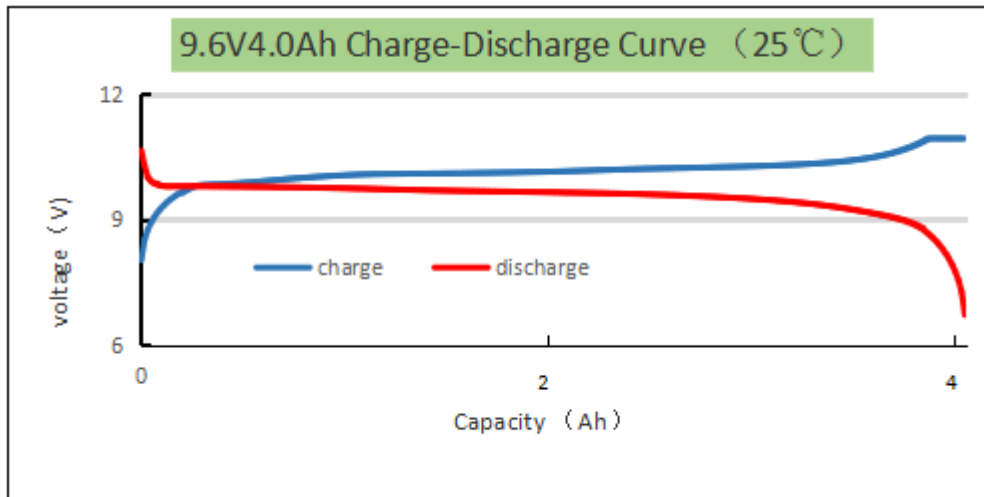

### 7. Cautions

7.1 Charging current should not be more than maximum charge current specified in the Product Specification , Charging current bigger than recommended current may damage the battery;

7.2 Discharging current should be no more than maximum discharge current specified in the Product Specification ; Discharging current bigger than recommended discharge current may damage the battery;

7.3 It should be noted that the cell would be possible to be at a over-discharged state by its self-discharge characteristics in case the cell is not used for long time. In order to prevent over-discharging, the cell shall be charged periodically to maintain between 9.9V and 10.2V ( Recommended 3 months one cycle ) .Over-discharging may causes loss of cell performance, characteristics, or battery functions;

7.4 Please charge the battery within 12 hours after use;

7.5 Battery storage environment follow the above conditions and in standard atmosphere, should be without strong magnet, no power, no static;

7.6 Do not reverse the polarity of the battery pack for any reason;

7.7 Do not short circuit the battery pack;

7.8 Do not reverse polarity charging;

7.9 Battery packs can be combined in series or in parallel according to the specification;



**HD9.6-4.0(9.6V4.0Ah)  
LiFePO4 Battery Pack Specification**

DOC NO. : HD/PK23-0701-1

REV : A2.0

PAGE: 7 of 6

DATE: 2024-01-27

7.10 Do not immerse the battery pack in water or sea water, or get it wet;

7.11 Do not disassemble battery;

7.12 Do not expose the battery to extreme heat or flame;

7.13 Please use a compatible charger for charging;