

NOTES1:
UL Standard
1.Rated voltage/current : 300V / 8A
2.Withstanding voltage : AC1500V/1Min.

IEC Standard

1.

Pollution degree	2
Overvoltage category	II
Rate impulse voltage(KV)	2.5KV
Rate voltage(V)	250V
Rate current(A)	7A

NOTES2:
1.Dimension shall be interpreted per ASME Y14.5-2009
2.Pitch : 3.5mm, Poles : N=02~24P
3.Operating temperature:-40℃~+105℃
4.Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm							-   
TO	Over	TO	Over	TO	Over	TO	Over	TO	
6	6 TO 10	10	10 TO 24	30	30 TO 60	60	60 TO 100	100	0.1/10
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2*	

5.RoHS Compliance






Ordering Information

JL15EDGVC - 350 XX X XX

Pitch 350=3.5PH No.of pins 2~24 Housing Color Serial code

B=Black
G=Green
U=Blue
R=Red
W=White
Y=Yellow
O=Orange
E=Grey

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
A0		NEW		21.11.15

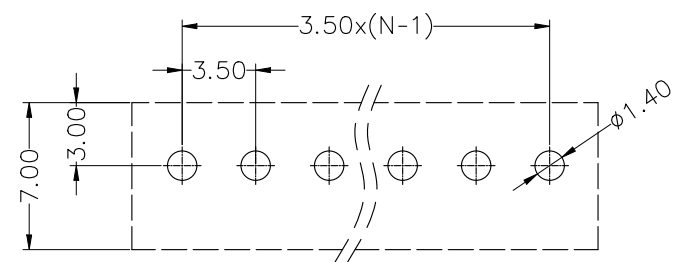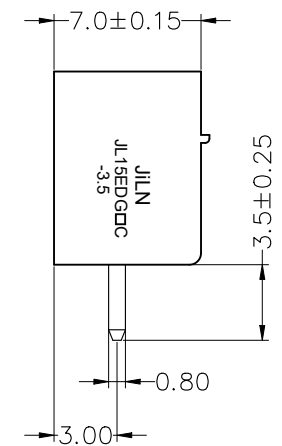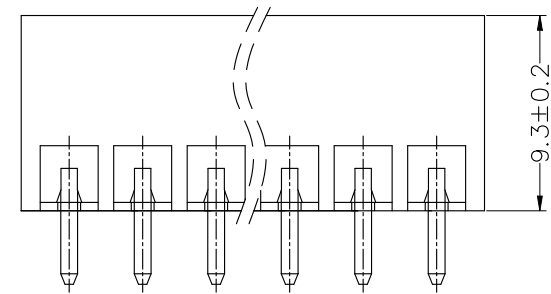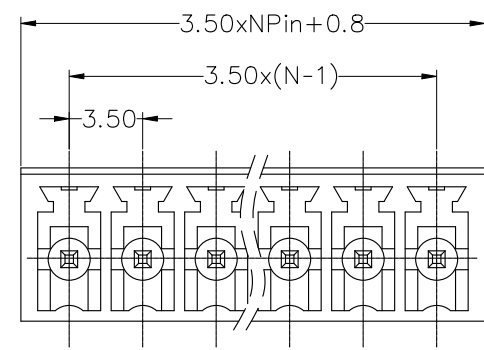

Recommended P.C.B Layout(Top Side)

DRAW	SHUANGPING ZHENG	SCALE	FIT	 东莞市锦凌电子有限公司 DONGGUAN JINLING ELECTRONIC CO.,LTD	
		UNIT	mm		
CHECK	LICHAO LIU	SIZE	A4	PART NO. JL15EDGVC-350XXXXX	
		SHEET	1/1	TITLE: JL15EDGVC-3.5-XXP插拔式公座	
APPROVE	YONGLIANG GAO	PROJ.			