

NOTES1:

UL Standard

- 1.Rated voltage/current : 300V / 8A
- 2.Withstanding voltage : AC1600V/1Min.

IEC Standard

1. Pollution degree	2
Overvoltage category	II
Rate impulse voltage(KV)	2.5KV
Rate voltage(V)	250V
Rate current(A)	7A

NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 5.08mm, Poles : N=02~24P
- 3.Operating temperature: -40°C~+105°C
- 4.Undimensioned tolerances:

Pitch range in mm				Nominal dimension range in mm							-	∩	□
	Over 6 TO 10	Over 10 TO 24		Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	Over 150				0.1/10		
	±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30			±2*		







5.RoHS Compliance

Ordering Information

JL15EDGVC - 508 XX X XX

Pitch	No.of pins	Housing	Color	Serial code
508=5.08PH	02-24P	B=Black		01-99
		G=Green		
		U=Blue		
		R=Red		
		W=White		
		Y=Yellow		
		O=Orange		
		E=Grey		

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
A0		NEW	WH.LU	2024.12.04

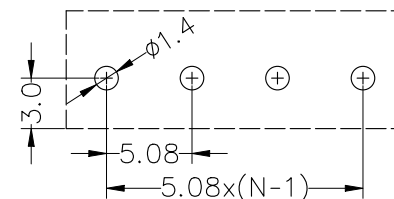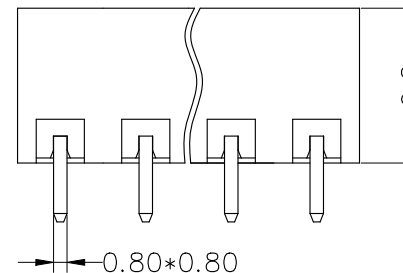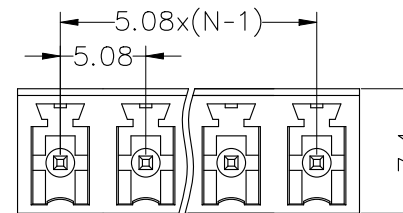

Recommended P.C.B Layout(Top Side)

DRAW	WH.LU	SCALE	FIT	JILN ® 东莞市锦凌电子有限公司 DONGGUAN JINLING ELECTRONIC CO.,LTD	
		UNIT	mm		
CHECK	W.CHEN	SIZE	A4	PART NO.	JL15EDGVC-508XXXXX
APPROVE	J.CHEN	SHEET	1/1	TITLE:	JL15EDGVC-THR-5.08-XXP插拔式公座/直脚
		PROJ.			