

NOTES1:

UL Standard

1. Rated voltage/current : 300V /15A
2. Withstanding voltage : AC2000V/1Min.
3. Torque value : M3 , 4.4Lb.in
4. Wire range : 22~14AWG(str)
5. Insulation Resistance : 1000MQ Min
6. Contact Resistance : 20mΩ Max
7. Housing Material : PA66 (UL94 V-0)

IEC Standard

1. Pollution degree	2
Overvoltage category	II
Rate impulse voltage(kV)	4KV
Rate voltage(V)	250V
Rate current(A)	24A

2. Torque value : M3 , 0.5N·m
3. Wire range : 0.5~2.5mm²

NOTES2:

1. Dimension shall be interpreted per ASME Y14.5-2009
2. Pitch : 7.62mm, Poles : N=02~24P
3. Operating temperature: -40°C~+105°C
4. Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm				- / /	
TO	Over TO	TO	Over TO	Over TO	Over TO	0.1/10	
6	6 TO 10	30	30 TO 60	60 TO 100	100 TO 150	<	
	±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00
							±1.30
							±2'

5. RoHS Compliance

Ordering Information






JL25S - 762 XX B 0 1

Pitch
762=7.62PH

No. of pins
2P~24P

Housing Color
B=Black
G=Green
U=Blue
R=Red
W=White
Y=Yellow
O=Orange
E=Grey

Packing
0=Pe bag
T=Tube
A=Tray

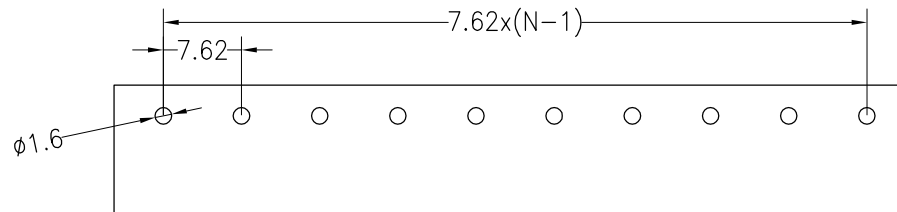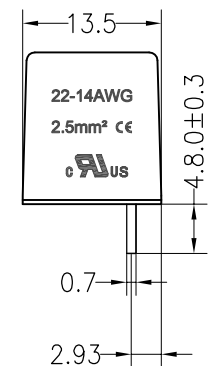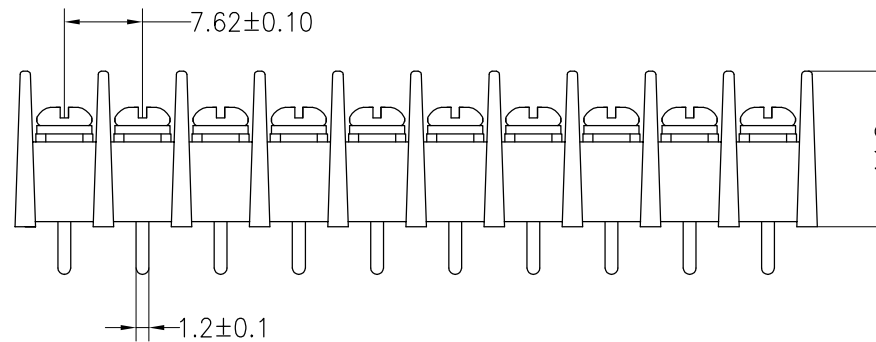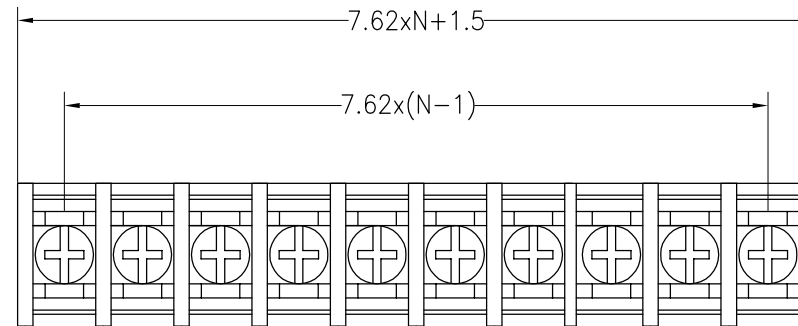

DRAW	SHUANGPING ZHENG	SCALE	FIT	JILN ® 东莞市锦凌电子有限公司 DONGGUAN JINLING ELECTRONIC CO.,LTD	
CHECK	LICHAO LIU	UNIT	mm		
APPROVE	YONGLIANG GAO	SIZE	A4	PART NO.	JL25S-762XXB01
		SHEET	1/1	TITLE:	JL25S-XXP栅栏式/黑色
		PROJ.			