

# KA78LXXA/KA78L05AA


## 3-Terminal 0.1A Positive Voltage Regulator

### Features


- Maximum Output Current of 100mA
- Output Voltage of 5V, 6V, 8V, 9V, 10V, 12V, 15V, 18V and 24V
- Thermal Overload Protection
- Short Circuit Current Limiting
- Output Voltage Offered in  $\pm 5\%$  Tolerance

### Description

The KA78LXXA/KA78L05AA series of fixed voltage monolithic integrated circuit voltage regulators are suitable for application that required supply current up to 100mA.

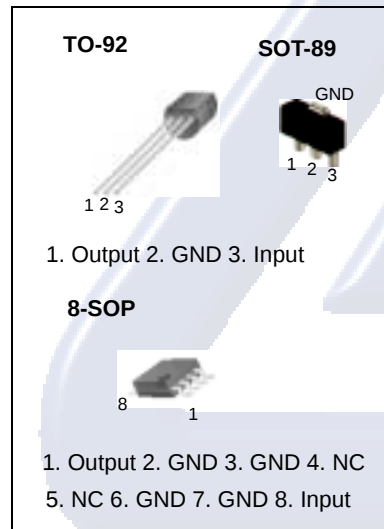

### Internal Block Diagram

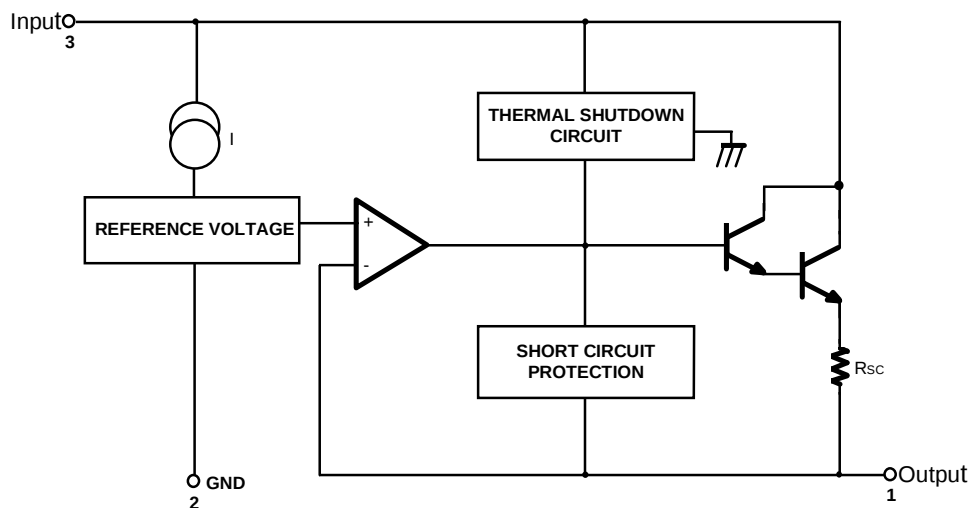

## Absolute Maximum Ratings

| Parameter                                                                                | Symbol    | Value          | Unit        |
|------------------------------------------------------------------------------------------|-----------|----------------|-------------|
| Input Voltage (for $V_O = 5V, 8V$ )<br>(for $V_O = 12V$ to $18V$ )<br>(for $V_O = 24V$ ) | $V_I$     | 30<br>35<br>40 | V<br>V<br>V |
| Operating Junction Temperature Range                                                     | $T_J$     | 0 ~ +150       | °C          |
| Storage Temperature Range                                                                | $T_{STG}$ | -65 ~ +150     | °C          |

## Electrical Characteristics(KA78L05A)

( $V_I = 10V$ ,  $I_O = 40mA$ ,  $0^\circ C \leq T_J \leq 125^\circ C$ ,  $C_I = 0.33\mu F$ ,  $C_O = 0.1\mu F$ , unless otherwise specified. (Note1))

| Parameter                        | Symbol                | Conditions                                                | Min. | Typ.  | Max. | Unit        |
|----------------------------------|-----------------------|-----------------------------------------------------------|------|-------|------|-------------|
| Output Voltage                   | $V_O$                 | $T_J = 25^\circ C$                                        | 4.8  | 5.0   | 5.2  | V           |
| Line Regulation (Note1)          | $\Delta V_O$          | $T_J = 25^\circ C$                                        |      |       |      |             |
|                                  |                       | $7V \leq V_I \leq 20V$                                    | -    | 8     | 150  | mV          |
| Load Regulation (Note1)          | $\Delta V_O$          | $T_J = 25^\circ C$                                        |      |       |      |             |
|                                  |                       | $1mA \leq I_O \leq 100mA$                                 | -    | 11    | 60   | mV          |
| Output Voltage                   | $V_O$                 | $7V \leq V_I \leq 20V$                                    | -    | -     | 5.25 | V           |
|                                  |                       | $7V \leq V_I \leq V_{MAX}$ (Note2)                        | 4.75 | -     | 5.25 | V           |
| Quiescent Current                | $I_Q$                 | $T_J = 25^\circ C$                                        | -    | 2.0   | 5.5  | mA          |
| Quiescent Current Change         | With Line             | $\Delta I_Q$                                              | -    | -     | 1.5  | mA          |
|                                  | With Load             | $\Delta I_Q$                                              | -    | -     | 0.1  | mA          |
| Output Noise Voltage             | $V_N$                 | $T_A = 25^\circ C$ , $10Hz \leq f \leq 100kHz$            | -    | 40    | -    | $\mu V/V_O$ |
| Temperature Coefficient of $V_O$ | $\Delta V_O/\Delta T$ | $I_O = 5mA$                                               | -    | -0.65 | -    | mV/°C       |
| Ripple Rejection                 | RR                    | $f = 120Hz$ , $8V \leq V_I \leq 18V$ , $T_J = 25^\circ C$ | 41   | 80    | -    | dB          |
| Dropout Voltage                  | $V_D$                 | $T_J = 25^\circ C$                                        | -    | 1.7   | -    | V           |

### Note:

1. The maximum steady state usable output current and input voltage are very dependent on the heat sinking and/or lead length of the package. The data above represent pulse test conditions with junction temperature as indicated at the initiation of tests.
2. Power dissipation  $P_D \leq 0.75W$ .

**Electrical Characteristics(KA78L06A)** (Continued)

( $V_I = 12V$ ,  $I_O = 40mA$ ,  $0^\circ C \leq T_J \leq 125^\circ C$ ,  $C_I = 0.33\mu F$ ,  $C_O = 0.1\mu F$ , unless otherwise specified. (Note 1)

| Parameter                                 |           | Symbol              | Conditions                                                                  | Min.                         | Typ. | Max. | Unit              |
|-------------------------------------------|-----------|---------------------|-----------------------------------------------------------------------------|------------------------------|------|------|-------------------|
| Output Voltage                            |           | V <sub>O</sub>      | T <sub>J</sub> = 25°C                                                       | 5.75                         | 6.0  | 6.25 | V                 |
| Line Regulation (Note1)                   |           | ΔV <sub>O</sub>     | T <sub>J</sub> = 25°C                                                       | 8.5V ≤ V <sub>I</sub> ≤ 20V  | -    | 64   | 175               |
|                                           |           |                     |                                                                             | 9V ≤ V <sub>I</sub> ≤ 20V    | -    | 54   | 125               |
| Load Regulation (Note1)                   |           | ΔV <sub>O</sub>     | T <sub>J</sub> = 25°C                                                       | 1mA ≤ I <sub>O</sub> ≤ 100mA | -    | 12.8 | 80                |
|                                           |           |                     |                                                                             | 1mA ≤ I <sub>O</sub> ≤ 70mA  | -    | 5.8  | 40                |
| Output Voltage                            |           | V <sub>O</sub>      | 8.5 ≤ V <sub>I</sub> ≤ 20V, 1mA ≤ I <sub>O</sub> ≤ 40mA                     | 5.7                          | -    | 6.3  | V                 |
|                                           |           |                     | 8.5 ≤ V <sub>I</sub> ≤ V <sub>MAX</sub> (Note), 1mA ≤ I <sub>O</sub> ≤ 70mA | 5.7                          | -    | 6.3  | V                 |
| Quiescent Current                         |           | I <sub>Q</sub>      | T <sub>J</sub> = 25°C                                                       | -                            | -    | 5.5  | mA                |
|                                           |           |                     | T <sub>J</sub> = 125°C                                                      | -                            | 3.9  | 6.0  | mA                |
| Quiescent Current Change                  | With Line | ΔI <sub>Q</sub>     | 9 ≤ V <sub>I</sub> ≤ 20V                                                    | -                            | -    | 1.5  | mA                |
|                                           | With Load | ΔI <sub>Q</sub>     | 1mA ≤ I <sub>O</sub> ≤ 40mA                                                 | -                            | -    | 0.1  | mA                |
| Output Noise Voltage                      |           | V <sub>N</sub>      | T <sub>A</sub> = 25°C, 10Hz ≤ f ≤ 100kHz                                    | -                            | 40   | -    | μV/V <sub>O</sub> |
| Temperature Coefficient of V <sub>O</sub> |           | ΔV <sub>O</sub> /ΔT | I <sub>O</sub> = 5mA                                                        | -                            | 0.75 | -    | mV/°C             |
| Ripple Rejection                          |           | RR                  | f = 120Hz, 10V ≤ V <sub>I</sub> ≤ 20V, T <sub>J</sub> = 25°C                | 40                           | 46   | -    | dB                |
| Dropout Voltage                           |           | V <sub>D</sub>      | T <sub>J</sub> = 25°C                                                       | -                            | 1.7  | -    | V                 |

**Note:**

1. The maximum steady state usable output current and input voltage are very dependent on the heat sinking and/or lead length of the package. The data above represent pulse test conditions with junction temperature as indicated at the initiation of tests.
2. Power dissipation  $P_D \leq 0.75W$ .

*Electrónica S.A. de C.V.*

**Electrical Characteristics(KA78L08A)** (Continued)(V<sub>I</sub> = 14V, I<sub>O</sub> = 40mA, 0°C ≤ T<sub>J</sub> ≤ 125°C, C<sub>I</sub> = 0.33μF, C<sub>O</sub> = 0.1μF, unless otherwise specified. (Note1)

| Parameter                                 |           | Symbol              | Conditions                                                   |                              | Min. | Typ. | Max. | Unit              |
|-------------------------------------------|-----------|---------------------|--------------------------------------------------------------|------------------------------|------|------|------|-------------------|
| Output Voltage                            |           | V <sub>O</sub>      | T <sub>J</sub> = 25°C                                        |                              | 7.7  | 8.0  | 8.3  | V                 |
| Line Regulation (Note1)                   |           | ΔV <sub>O</sub>     | T <sub>J</sub> = 25°C                                        | 10.5V ≤ V <sub>I</sub> ≤ 23V | -    | 10   | 175  | mV                |
|                                           |           |                     |                                                              | 11V ≤ V <sub>I</sub> ≤ 23V   | -    | 8    | 125  | mV                |
| Load Regulation (Note1)                   |           | ΔV <sub>O</sub>     | T <sub>J</sub> = 25°C                                        | 1mA ≤ I <sub>O</sub> ≤ 100mA | -    | 15   | 80   | mV                |
|                                           |           |                     |                                                              | 1mA ≤ I <sub>O</sub> ≤ 40mA  | -    | 8.0  | 40   | mV                |
| Output Voltage                            |           | V <sub>O</sub>      | 10.5V ≤ V <sub>I</sub> ≤ 23V                                 | 1mA ≤ I <sub>O</sub> ≤ 40mA  | 7.6  | -    | 8.4  | V                 |
|                                           |           |                     | 10.5V ≤ V <sub>I</sub> ≤ V <sub>MAX</sub> (Note2)            | 1mA ≤ I <sub>O</sub> ≤ 70mA  | 7.6  | -    | 8.4  | V                 |
| Quiescent Current                         |           | I <sub>Q</sub>      | T <sub>J</sub> = 25°C                                        |                              | -    | 2.0  | 5.5  | mA                |
| Quiescent Current Change                  | With Line | ΔI <sub>Q</sub>     | 11V ≤ V <sub>I</sub> ≤ 23V                                   |                              | -    | -    | 1.5  | mA                |
|                                           | With Load | ΔI <sub>Q</sub>     | 1mA ≤ I <sub>O</sub> ≤ 40mA                                  |                              | -    | -    | 0.1  | mA                |
| Output Noise Voltage                      |           | V <sub>N</sub>      | T <sub>A</sub> = 25°C, 10Hz ≤ f ≤100kHz                      |                              | -    | 60   | -    | μV/V <sub>O</sub> |
| Temperature Coefficient of V <sub>O</sub> |           | ΔV <sub>O</sub> /ΔT | I <sub>O</sub> = 5mA                                         |                              | -    | -0.8 | -    | mV/°C             |
| Ripple Rejection                          |           | RR                  | f = 120Hz, 11V ≤ V <sub>I</sub> ≤ 21V, T <sub>J</sub> = 25°C |                              | 39   | 70   | -    | dB                |
| Dropout Voltage                           |           | V <sub>D</sub>      | T <sub>J</sub> = 25°C                                        |                              | -    | 1.7  | -    | V                 |

**Note:**

1. The maximum steady state usable output current and input voltage are very dependent on the heat sinking and/or lead length of the package. The data above represent pulse test conditions with junction temperature as indicated at the initiation of tests.
2. Power dissipation P<sub>D</sub> ≤ 0.75W.

**Electrical Characteristics(KA78L09A)** (Continued)

( $V_I = 15V$ ,  $I_O = 40mA$ ,  $0^\circ C \leq T_J \leq 125^\circ C$ ,  $C_I = 0.33\mu F$ ,  $C_O = 0.1\mu F$ , unless otherwise specified. (Note1))

| Parameter                                 |           | Symbol              | Conditions                                                   |                              | Min. | Typ. | Max. | Unit              |
|-------------------------------------------|-----------|---------------------|--------------------------------------------------------------|------------------------------|------|------|------|-------------------|
| Output Voltage                            |           | V <sub>O</sub>      | T <sub>J</sub> = 25°C                                        |                              | 8.64 | 9.0  | 9.36 | V                 |
| Line Regulation (Note1)                   |           | ΔV <sub>O</sub>     | T <sub>J</sub> = 25°C                                        | 11.5V ≤ V <sub>I</sub> ≤ 24V | -    | 90   | 200  | mV                |
|                                           |           |                     |                                                              | 13V ≤ V <sub>I</sub> ≤ 24V   | -    | 100  | 150  | mV                |
| Load Regulation (Note1)                   |           | ΔV <sub>O</sub>     | T <sub>J</sub> = 25°C                                        | 1mA ≤ I <sub>O</sub> ≤ 100mA | -    | 20   | 90   | mV                |
|                                           |           |                     |                                                              | 1mA ≤ I <sub>O</sub> ≤ 40mA  | -    | 10   | 45   | mV                |
| Output Voltage                            |           | V <sub>O</sub>      | 11.5V ≤ V <sub>I</sub> ≤ 24V                                 | 1mA ≤ I <sub>O</sub> ≤ 40mA  | 8.55 | -    | 9.45 | V                 |
|                                           |           |                     | 11.5V ≤ V <sub>I</sub> ≤ V <sub>MAX</sub> (Note 2)           | 1mA ≤ I <sub>O</sub> ≤ 70mA  | 8.55 | -    | 9.45 | V                 |
| Quiescent Current                         |           | I <sub>Q</sub>      | T <sub>J</sub> = 25°C                                        |                              | -    | 2.1  | 6.0  | mA                |
| Quiescent Current Change                  | With Line | ΔI <sub>Q</sub>     | 13V ≤ V <sub>I</sub> ≤ 24V                                   |                              | -    | -    | 1.5  | mA                |
|                                           | With Load | ΔI <sub>Q</sub>     | 1mA ≤ I <sub>O</sub> ≤ 40mA                                  |                              | -    | -    | 0.1  | mA                |
| Output Noise Voltage                      |           | V <sub>N</sub>      | T <sub>A</sub> = 25°C, 10Hz ≤ f ≤ 100kHz                     |                              | -    | 70   | -    | μV/V <sub>O</sub> |
| Temperature Coefficient of V <sub>O</sub> |           | ΔV <sub>O</sub> /ΔT | I <sub>O</sub> = 5mA                                         |                              | -    | -0.9 | -    | mV/°C             |
| Ripple Rejection                          |           | RR                  | f = 120Hz, 12V ≤ V <sub>I</sub> ≤ 22V, T <sub>J</sub> = 25°C |                              | 38   | 44   | -    | dB                |
| Dropout Voltage                           |           | V <sub>D</sub>      | T <sub>J</sub> = 25°C                                        |                              | -    | 1.7  | -    | V                 |

**Note:**

1. The maximum steady state usable output current and input voltage are very dependent on the heat sinking and/or lead length of the package. The data above represent pulse test conditions with junction temperature as indicated at the initiation of tests.
2. Power dissipation  $P_D \leq 0.75W$ .

*Electrónica S.A. de C.V.*

**Electrical Characteristics(KA78L10A)** (Continued)(V<sub>I</sub> = 16V, I<sub>O</sub> = 40mA, 0 °C ≤ T<sub>J</sub> ≤ 125 °C, C<sub>I</sub> = 0.33 μF, C<sub>O</sub> = 0.1μF, unless otherwise specified. (Note1)

| Parameter                                 |           | Symbol              | Conditions                                                                       |                              | Min. | Typ. | Max. | Unit              |
|-------------------------------------------|-----------|---------------------|----------------------------------------------------------------------------------|------------------------------|------|------|------|-------------------|
| Output Voltage                            |           | V <sub>O</sub>      | T <sub>J</sub> = 25°C                                                            |                              | 9.6  | 10.0 | 10.4 | V                 |
| Line Regulation (Note1)                   |           | ΔV <sub>O</sub>     | T <sub>J</sub> = 25°C                                                            | 12.5 ≤ V <sub>I</sub> ≤ 25V  | -    | 100  | 220  | mV                |
|                                           |           |                     |                                                                                  | 14V ≤ V <sub>I</sub> ≤ 25V   | -    | 100  | 170  | mV                |
| Load Regulation (Note1)                   |           | ΔV <sub>O</sub>     | T <sub>J</sub> = 25°C                                                            | 1mA ≤ I <sub>O</sub> ≤ 100mA | -    | 20   | 94   | mV                |
|                                           |           |                     |                                                                                  | 1mA ≤ I <sub>O</sub> ≤ 70mA  | -    | 10   | 47   | mV                |
| Output Voltage                            |           | V <sub>O</sub>      | 12.5V ≤ V <sub>I</sub> ≤ 25V, 1mA ≤ I <sub>O</sub> ≤ 40mA                        |                              | 9.5  | -    | 10.5 | V                 |
|                                           |           |                     | 12.5V ≤ V <sub>I</sub> ≤ V <sub>MAX</sub> (Note2)<br>1mA ≤ I <sub>O</sub> ≤ 70mA |                              | 9.5  | -    | 10.5 |                   |
| Quiescent Current                         |           | I <sub>Q</sub>      | T <sub>J</sub> = 25°C                                                            |                              | -    | -    | 6.0  | mA                |
|                                           |           |                     | T <sub>J</sub> =125°C                                                            |                              | -    | 4.2  | 6.5  |                   |
| Quiescent Current Change                  | With Line | ΔI <sub>Q</sub>     | 12.5 ≤ V <sub>I</sub> ≤ 25V                                                      |                              | -    | -    | 1.5  | mA                |
|                                           | With Load | ΔI <sub>Q</sub>     | 1mA ≤ I <sub>O</sub> ≤ 40mA                                                      |                              | -    | -    | 0.1  | mA                |
| Output Noise Voltage                      |           | V <sub>N</sub>      | T <sub>A</sub> = 25°C, 10Hz ≤ f ≤ 100kHz                                         |                              | -    | 74   | -    | μV/V <sub>O</sub> |
| Temperature Coefficient of V <sub>O</sub> |           | ΔV <sub>O</sub> /ΔT | I <sub>O</sub> = 5mA                                                             |                              | -    | 0.95 | -    | mV/°C             |
| Ripple Rejection                          |           | RR                  | f = 120Hz, 15V ≤ V <sub>I</sub> ≤ 25V, T <sub>J</sub> = 25°C                     |                              | 38   | 43   | -    | dB                |
| Dropout Voltage                           |           | V <sub>D</sub>      | T <sub>J</sub> = 25°C                                                            |                              | -    | 1.7  | -    | V                 |

**Notes:**

1. The maximum steady state usable output current and input voltage are very dependent on the heat sinking and/or lead length of the package. The data above represent pulse test conditions with junction temperature as indicated at the initiation of tests.
2. Power dissipation P<sub>D</sub> ≤ 0.75W.

**Electrical Characteristics(KA78L12A)** (Continued)

( $V_I = 19V$ ,  $I_O = 40mA$ ,  $0^\circ C \leq T_J \leq 125^\circ C$ ,  $C_I = 0.33 \mu F$ ,  $C_O = 0.1 \mu F$ , unless otherwise specified. (Note 1)

| Parameter                        | Symbol                | Conditions                                                 | Min.                      | Typ. | Max. | Unit           |
|----------------------------------|-----------------------|------------------------------------------------------------|---------------------------|------|------|----------------|
| Output Voltage                   | $V_O$                 | $T_J = 25^\circ C$                                         | 11.5                      | 12   | 12.5 | V              |
| Line Regulation (Note1)          | $\Delta V_O$          | $T_J = 25^\circ C$                                         | $14.5V \leq V_I \leq 27V$ | -    | 20   | 250 mV         |
|                                  |                       |                                                            | $16V \leq V_I \leq 27V$   | -    | 15   | 200 mV         |
| Load Regulation (Note1)          | $\Delta V_O$          | $T_J = 25^\circ C$                                         | $1mA \leq I_O \leq 100mA$ | -    | 20   | 100 mV         |
|                                  |                       |                                                            | $1mA \leq I_O \leq 40mA$  | -    | 10   | 50 mV          |
| Output Voltage                   | $V_O$                 | $14.5V \leq V_I \leq 27V$                                  | $1mA \leq I_O \leq 40mA$  | 11.4 | -    | 12.6 V         |
|                                  |                       | $14.5V \leq V_I \leq V_{MAX}$ (Note 2)                     | $1mA \leq I_O \leq 70mA$  | 11.4 | -    | 12.6 V         |
| Quiescent Current                | $I_Q$                 | $T_J = 25^\circ C$                                         | -                         | 2.1  | 6.0  | mA             |
| Quiescent Current Change         | With Line             | $\Delta I_Q$                                               | $16V \leq V_I \leq 27V$   | -    | -    | 1.5 mA         |
|                                  | With Load             | $\Delta I_Q$                                               | $1mA \leq I_O \leq 40mA$  | -    | -    | 0.1 mA         |
| Output Noise Voltage             | $V_N$                 | $T_A = 25^\circ C$ , $10Hz \leq f \leq 100kHz$             | -                         | 80   | -    | $\mu V/V_O$    |
| Temperature Coefficient of $V_O$ | $\Delta V_O/\Delta T$ | $I_O = 5mA$                                                | -                         | -1.0 | -    | mV/ $^\circ C$ |
| Ripple Rejection                 | RR                    | $f = 120Hz$ , $15V \leq V_I \leq 25V$ , $T_J = 25^\circ C$ | 37                        | 65   | -    | dB             |
| Dropout Voltage                  | $V_D$                 | $T_J = 25^\circ C$                                         | -                         | 1.7  | -    | V              |

**Note:**

1. The maximum steady state usable output current and input voltage are very dependent on the heat sinking and/or lead length of the package. The data above represent pulse test conditions with junction temperature as indicated at the initiation of tests.
2. Power dissipation  $P_D \leq 0.75W$ .

*Electrónica S.A. de C.V.*

**Electrical Characteristics(KA78L15A)** (Continued)

( $V_I = 23V$ ,  $I_O = 40mA$ ,  $0^\circ C \leq T_J \leq 125^\circ C$ ,  $C_I = 0.33 \mu F$ ,  $C_O = 0.1 \mu F$ , unless otherwise specified. (Note1))

| Parameter                                 |           | Symbol              | Conditions                                                       |                              | Min.      | Typ. | Max.      | Unit              |
|-------------------------------------------|-----------|---------------------|------------------------------------------------------------------|------------------------------|-----------|------|-----------|-------------------|
| Output Voltage                            |           | V <sub>O</sub>      | T <sub>J</sub> = 25°C                                            |                              | 14.4      | 15   | 15.6      | V                 |
| Line Regulation (Note1)                   |           | ΔV <sub>O</sub>     | T <sub>J</sub> = 25°C                                            | 17.5V ≤ V <sub>I</sub> ≤ 30V | -         | 25   | 300       | mV                |
|                                           |           |                     |                                                                  | 20V ≤ V <sub>I</sub> ≤ 30V   | -         | 20   | 250       | mV                |
| Load Regulation (Note1)                   |           | ΔV <sub>O</sub>     | T <sub>J</sub> = 25°C                                            | 1mA ≤ I <sub>O</sub> ≤ 100mA | -         | 25   | 150       | mV                |
|                                           |           |                     |                                                                  | 1mA ≤ I <sub>O</sub> ≤ 40mA  | -         | 12   | 75        | mV                |
| Output Voltage                            |           | V <sub>O</sub>      | 17.5V ≤ V <sub>I</sub> ≤ 30V                                     | 1mA ≤ I <sub>O</sub> ≤ 40mA  | 14.2<br>5 | -    | 15.7<br>5 | V                 |
|                                           |           |                     | 17.5V ≤ V <sub>I</sub> ≤ V <sub>MAX</sub> (Note 2)               | 1mA ≤ I <sub>O</sub> ≤ 70mA  | 14.2<br>5 | -    | 15.7<br>5 | V                 |
| Quiescent Current                         |           | I <sub>Q</sub>      | T <sub>J</sub> = 25°C                                            |                              | -         | 2.1  | 6.0       | mA                |
| Quiescent Current Change                  | With Line | ΔI <sub>Q</sub>     | 20V ≤ V <sub>I</sub> ≤ 30V                                       |                              | -         | -    | 1.5       | mA                |
|                                           | With Load | ΔI <sub>Q</sub>     | 1mA ≤ I <sub>O</sub> ≤ 40mA                                      |                              | -         | -    | 0.1       | mA                |
| Output Noise Voltage                      |           | V <sub>N</sub>      | T <sub>A</sub> = 25°C, 10Hz ≤ f ≤ 100kHz                         |                              | -         | 90   | -         | μV/V <sub>O</sub> |
| Temperature Coefficient of V <sub>O</sub> |           | ΔV <sub>O</sub> /ΔT | I <sub>O</sub> = 5mA                                             |                              | -         | -1.3 | -         | mV/°C             |
| Ripple Rejection                          |           | RR                  | f = 120Hz, 18.5V ≤ V <sub>I</sub> ≤ 28.5V, T <sub>J</sub> = 25°C |                              | 34        | 60   | -         | dB                |
| Dropout Voltage                           |           | V <sub>D</sub>      | T <sub>J</sub> = 25°C                                            |                              | -         | 1.7  | -         | V                 |

**Note:**

1. The maximum steady state usable output current and input voltage are very dependent on the heat sinking and/or lead length of the package. The data above represent pulse test conditions with junction temperature as indicated at the initiation of tests.
2. Power dissipation  $P_D \leq 0.75W$ .

**Electrical Characteristics(KA78L18A)** (Continued)(V<sub>I</sub> = 27V, I<sub>O</sub> = 40mA, 0°C ≤ T<sub>J</sub> ≤ 125°C, C<sub>I</sub> = 0.33 μF, C<sub>O</sub> = 0.1μF, unless otherwise specified. (Note1)

| Parameter                                 | Symbol              | Conditions                                                   | Min.                         | Typ. | Max. | Unit              |
|-------------------------------------------|---------------------|--------------------------------------------------------------|------------------------------|------|------|-------------------|
| Output Voltage                            | V <sub>O</sub>      | T <sub>J</sub> = 25°C                                        | 17.3                         | 18   | 18.7 | V                 |
| Line Regulation (Note1)                   | ΔV <sub>O</sub>     | T <sub>J</sub> = 25°C                                        | 21V ≤ V <sub>I</sub> ≤ 33V   | -    | 145  | 300 mV            |
|                                           |                     |                                                              | 22V ≤ V <sub>I</sub> ≤ 33V   | -    | 135  | 250 mV            |
| Load Regulation (Note1)                   | ΔV <sub>O</sub>     | T <sub>J</sub> = 25°C                                        | 1mA ≤ I <sub>O</sub> ≤ 100mA | -    | 30   | 170 mV            |
|                                           |                     |                                                              | 1mA ≤ I <sub>O</sub> ≤ 40mA  | -    | 15   | 85 mV             |
| Output Voltage                            | V <sub>O</sub>      | 21V ≤ V <sub>I</sub> ≤ 33V                                   | 1mA ≤ I <sub>O</sub> ≤ 40mA  | 17.1 | -    | 18.9 V            |
|                                           |                     | 21V ≤ V <sub>I</sub> ≤ V <sub>MAX</sub> (Note 2)             | 1mA ≤ I <sub>O</sub> ≤ 70mA  | 17.1 | -    | 18.9 V            |
| Quiescent Current                         | I <sub>Q</sub>      | T <sub>J</sub> = 25°C                                        | -                            | 2.2  | 6.0  | mA                |
| Quiescent Current Change                  | With Line           | ΔI <sub>Q</sub>                                              | 21V ≤ V <sub>I</sub> ≤ 33V   | -    | -    | 1.5 mA            |
|                                           | With Load           | ΔI <sub>Q</sub>                                              | 1mA ≤ I <sub>O</sub> ≤ 40mA  | -    | -    | 0.1 mA            |
| Output Noise Voltage                      | V <sub>N</sub>      | T <sub>A</sub> = 25°C, 10Hz ≤ f ≤ 100kHz                     | -                            | 150  | -    | μV/V <sub>O</sub> |
| Temperature Coefficient of V <sub>O</sub> | ΔV <sub>O</sub> /ΔT | I <sub>O</sub> = 5mA                                         | -                            | -1.8 | -    | mV/°C             |
| Ripple Rejection                          | RR                  | f = 120Hz, 23V ≤ V <sub>I</sub> ≤ 33V, T <sub>J</sub> = 25°C | 34                           | 48   | -    | dB                |
| Dropout Voltage                           | V <sub>D</sub>      | T <sub>J</sub> = 25°C                                        | -                            | 1.7  | -    | V                 |

**Note:**

1. The maximum steady state usable output current and input voltage are very dependent on the heat sinking and/or lead length of the package. The data above represent pulse test conditions with junction temperature as indicated at the initiation of tests.
2. Power dissipation P<sub>D</sub> ≤ 0.75W.

*Electrónica S.A. de C.V.*

**Electrical Characteristics(KA78L24A)** (Continued)(V<sub>I</sub> = 33V, I<sub>O</sub> = 40mA, 0°C ≤ T<sub>J</sub> ≤ 125°C, C<sub>I</sub> = 0.33 μF, C<sub>O</sub> = 0.1μF, unless otherwise specified. (Note1)

| Parameter                                 | Symbol              | Conditions                                                   | Min.                         | Typ. | Max. | Unit              |
|-------------------------------------------|---------------------|--------------------------------------------------------------|------------------------------|------|------|-------------------|
| Output Voltage                            | V <sub>O</sub>      | T <sub>J</sub> = 25°C                                        | 23                           | 24   | 25   | V                 |
| Line Regulation (Note1)                   | ΔV <sub>O</sub>     | T <sub>J</sub> = 25°C                                        | 27V ≤ V <sub>I</sub> ≤ 38V   | -    | 160  | 300 mV            |
|                                           |                     |                                                              | 28V ≤ V <sub>I</sub> ≤ 38V   | -    | 150  | 250 mV            |
| Load Regulation (Note1)                   | ΔV <sub>O</sub>     | T <sub>J</sub> = 25°C                                        | 1mA ≤ I <sub>O</sub> ≤ 100mA | -    | 40   | 200 mV            |
|                                           |                     |                                                              | 1mA ≤ I <sub>O</sub> ≤ 40mA  | -    | 20   | 100 mV            |
| Output Voltage                            | V <sub>O</sub>      | 27V ≤ V <sub>I</sub> ≤ 38V                                   | 1mA ≤ I <sub>O</sub> ≤ 40mA  | 22.8 | -    | 25.2 V            |
|                                           |                     | 27V ≤ V <sub>I</sub> ≤ V <sub>MAX</sub> (Note2)              | 1mA ≤ I <sub>O</sub> ≤ 70mA  | 22.8 | -    | 25.2 V            |
| Quiescent Current                         | I <sub>Q</sub>      | T <sub>J</sub> = 25°C                                        | -                            | 2.2  | 6.0  | mA                |
| Quiescent Current Change                  | With Line           | ΔI <sub>Q</sub>                                              | 28V ≤ V <sub>I</sub> ≤ 38V   | -    | -    | 1.5 mA            |
|                                           | With Load           | ΔI <sub>Q</sub>                                              | 1mA ≤ I <sub>O</sub> ≤ 40mA  | -    | -    | 0.1 mA            |
| Output Noise Voltage                      | V <sub>N</sub>      | T <sub>A</sub> = 25°C, 10Hz ≤ f ≤ 100kHz                     | -                            | 200  | -    | μV/V <sub>O</sub> |
| Temperature Coefficient of V <sub>O</sub> | ΔV <sub>O</sub> /ΔT | I <sub>O</sub> = 5mA                                         | -                            | -2.0 | -    | mV/°C             |
| Ripple Rejection                          | RR                  | f = 120Hz, 28V ≤ V <sub>I</sub> ≤ 38V, T <sub>J</sub> = 25°C | 34                           | 45   | -    | dB                |
| Dropout Voltage                           | V <sub>D</sub>      | T <sub>J</sub> = 25°C                                        | -                            | 1.7  | -    | V                 |

**Note:**

1. The maximum steady state usable output current and input voltage are very dependent on the heat sinking and/or lead length of the package. The data above represent pulse test conditions with junction temperature as indicated at the initiation of tests.
2. Power dissipation P<sub>D</sub> ≤ 0.75W.

## Absolute Maximum Ratings

| Parameter                                                                                | Symbol    | Value          | Unit        |
|------------------------------------------------------------------------------------------|-----------|----------------|-------------|
| Input Voltage (for $V_O = 5V, 8V$ )<br>(for $V_O = 12V$ to $18V$ )<br>(for $V_O = 24V$ ) | $V_I$     | 30<br>35<br>40 | V<br>V<br>V |
| Operating Junction Temperature Range                                                     | $T_J$     | 0 ~ +150       | °C          |
| Storage Temperature Range                                                                | $T_{STG}$ | -65 ~ +150     | °C          |

## Electrical Characteristics(KA78L05AA) (Continued)


( $V_I = 10V$ ,  $I_O = 40mA$ ,  $0^\circ C \leq T_J \leq 125^\circ C$ ,  $C_I = 0.33 \mu F$ ,  $C_O = 0.1 \mu F$ , unless otherwise specified. (Note1))

| Parameter                        | Symbol                | Conditions                                                | Min. | Typ.  | Max. | Unit        |
|----------------------------------|-----------------------|-----------------------------------------------------------|------|-------|------|-------------|
| Output Voltage                   | $V_O$                 | $T_J = 25^\circ C$                                        | 4.9  | 5.0   | 5.1  | V           |
| Line Regulation (Note1)          | $\Delta V_O$          | $T_J = 25^\circ C$                                        |      |       |      |             |
|                                  |                       | $7V \leq V_I \leq 20V$                                    | -    | 8     | 150  | mV          |
| Load Regulation (Note1)          | $\Delta V_O$          | $T_J = 25^\circ C$                                        |      |       |      |             |
|                                  |                       | $1mA \leq I_O \leq 100mA$                                 | -    | 11    | 50   | mV          |
| Output Voltage                   | $V_O$                 | $7V \leq V_I \leq 20V$                                    | -    | -     | 5.15 | V           |
|                                  |                       | $7V \leq V_I \leq V_{MAX}$ (Note2)                        | 4.85 | -     | 5.15 | V           |
| Quiescent Current                | $I_Q$                 | $T_J = 25^\circ C$                                        | -    | 2.0   | 5.5  | mA          |
| Quiescent Current Change         | With Line             | $\Delta I_Q$                                              | -    | -     | 1.5  | mA          |
|                                  | With Load             | $\Delta I_Q$                                              | -    | -     | 0.1  | mA          |
| Output Noise Voltage             | $V_N$                 | $T_A = 25^\circ C$ , $10Hz \leq f \leq 100kHz$            | -    | 40    | -    | $\mu V/V_O$ |
| Temperature Coefficient of $V_O$ | $\Delta V_O/\Delta T$ | $I_O = 5mA$                                               | -    | -0.65 | -    | mV/°C       |
| Ripple Rejection                 | RR                    | $f = 120Hz$ , $8V \leq V_I \leq 18V$ , $T_J = 25^\circ C$ | 41   | 80    | -    | dB          |
| Dropout Voltage                  | $V_D$                 | $T_J = 25^\circ C$                                        | -    | 1.7   | -    | V           |

### Note:

1. The maximum steady state usable output current and input voltage are very dependent on the heat sinking and/or lead length of the package. The data above represent pulse test conditions with junction temperature as indicated at the initiation of tests.
2. Power dissipation  $P_D \leq 0.75W$ .

## Typical Application

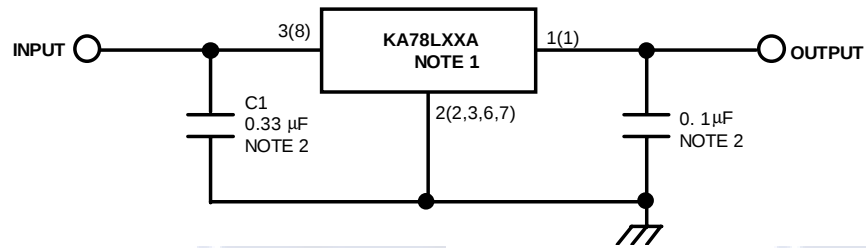

'(' : 8SOP Type

**Note:**



1. To specify an output voltage, substitute voltage value for "XX".
2. Bypass Capacitors are recommend for optimum stability and transient response and should be located as close as possible to the regulator

## Mechanical Dimensions

### Package

Dimensions in millimeters

### TO-92

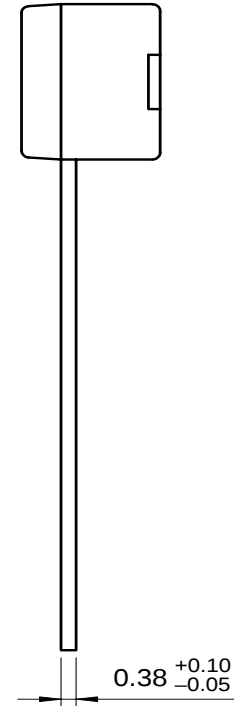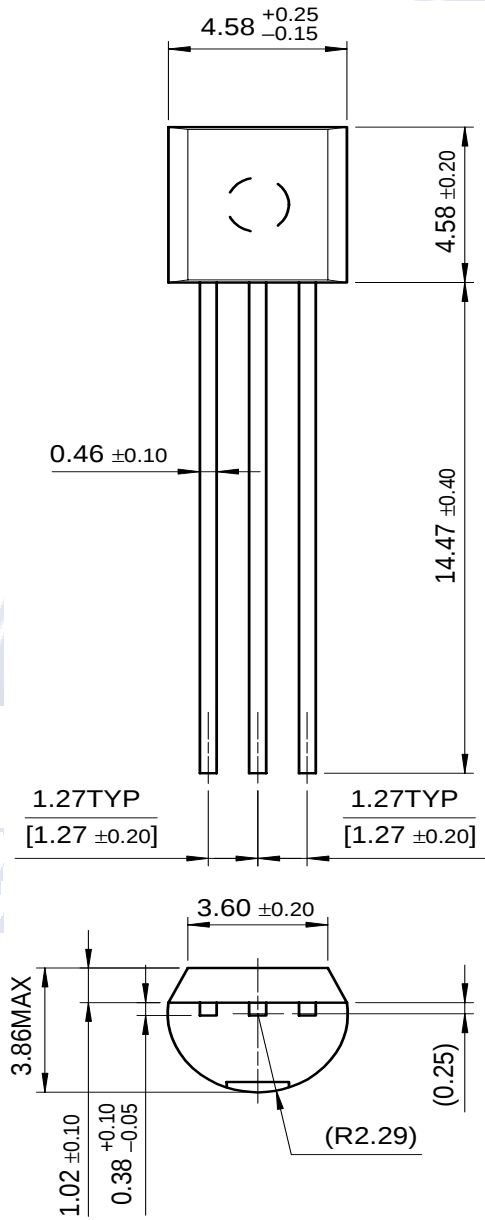


KA78LXXA/KA78L05AA

Mechanical Dimensions (Continued)

Package

Dimensions in millimeters


8-SOP

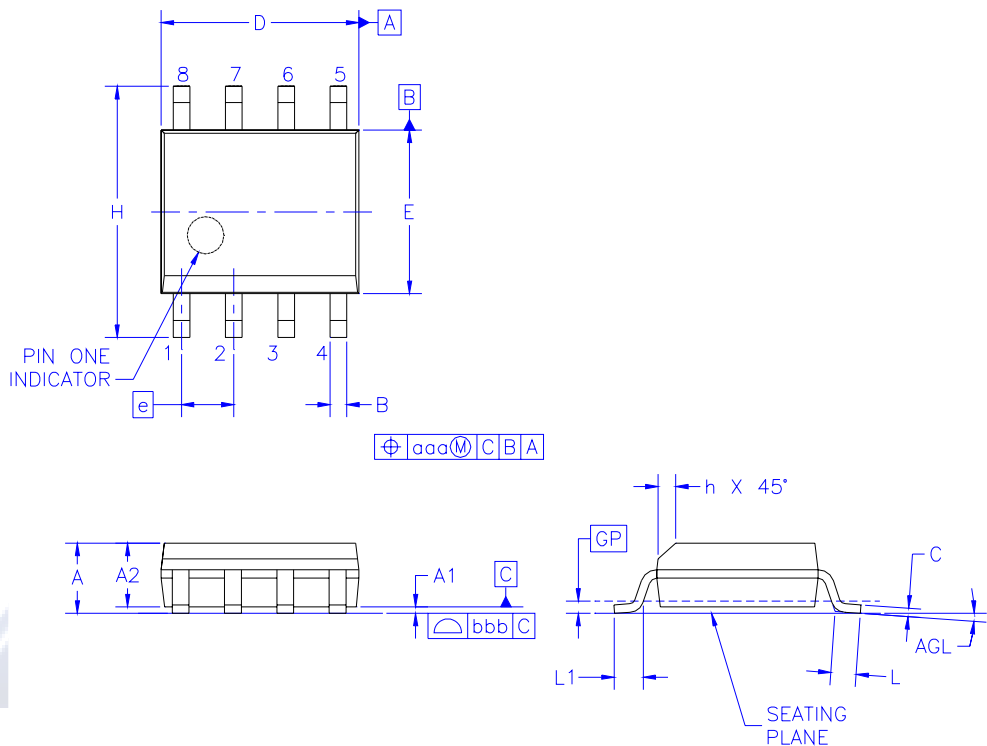

| Symbol | Min      | Nom  | Max  |
|--------|----------|------|------|
| A      | -        | -    | 1.75 |
| A1     | 0.10     | 0.15 | 0.25 |
| A2     | 1.25     | 1.45 | 1.50 |
| B      | 0.35     | 0.37 | 0.51 |
| C      | 0.19     | 0.20 | 0.25 |
| D      | 4.80     | 4.90 | 5.00 |
| E      | 3.80     | 3.90 | 4.00 |
| e      | 1.27BSC  |      |      |
| H      | 5.79     | 5.99 | 6.20 |
| h      | 0.25     | -    | 0.50 |
| L      | 0.50     | 0.70 | 0.90 |
| GP     | 0.36 BSC |      |      |
| q      | 0        | -    | 8    |
| aaa    | -        | -    | 0.25 |
| bbb    | -        | -    | 0.10 |

**Mechanical Dimensions** (Continued)**Package**

Dimensions in millimeters

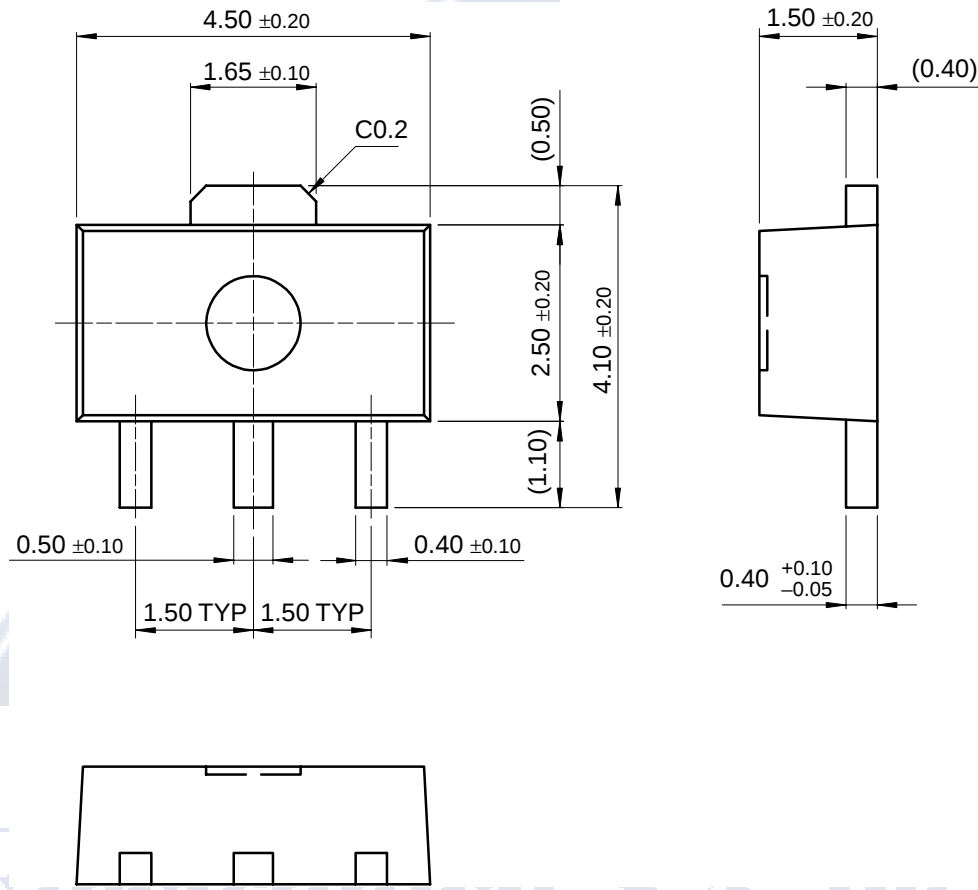**SOT-89**

KA78LXXA/KA78L05AA

## Ordering Information

| Product Number | Package | Packing     | Output Voltage Tolerance | Operating Temperature |
|----------------|---------|-------------|--------------------------|-----------------------|
| KA78L05AZTA    | TO-92   | Ammo        | 5%                       | 0 ~ +125 °C           |
| KA78L05AZTF    |         | Tape & Reel |                          |                       |
| KA78L05AZBU    |         | Bulk        |                          |                       |
| KA78L06AZTA    |         | Ammo        |                          |                       |
| KA78L06AZBU    |         | Tape & Reel |                          |                       |
| KA78L08AZTA    |         | Ammo        |                          |                       |
| KA78L08AZTF    |         | Tape & Reel |                          |                       |
| KA78L08AZBU    |         | Bulk        |                          |                       |
| KA78L09AZTA    |         | Ammo        |                          |                       |
| KA78L09AZBU    |         | Tape & Reel |                          |                       |
| KA78L10AZTA    |         | Ammo        |                          |                       |
| KA78L10AZBU    |         | Tape & Reel |                          |                       |
| KA78L12AZTA    |         | Ammo        |                          |                       |
| KA78L12AZTF    |         | Tape & Reel |                          |                       |
| KA78L12AZBU    |         | Bulk        |                          |                       |
| KA78L15AZTA    |         | Ammo        |                          |                       |
| KA78L15AZBU    |         | Tape & Reel |                          |                       |
| KA78L18AZTA    |         | Ammo        |                          |                       |
| KA78L18AZBU    |         | Tape & Reel |                          |                       |
| KA78L24AZTA    |         | Ammo        |                          |                       |
| KA78L05AMTF    | SOT-89  | Tape & Reel | 2%                       | 0 ~ +125 °C           |
| KA78L05AMTM    |         | Tape & Reel |                          |                       |
| KA78L08AMTF    |         | Tape & Reel |                          |                       |
| KA78L09AMTF    |         | Tape & Reel |                          |                       |
| KA78L12AMTF    |         | Tape & Reel |                          |                       |
| KA78L05AD      | 8-SOP   | Tube        |                          |                       |
| KA78L05ADTF    |         | Tape & Reel |                          |                       |
| KA78L08AD      |         | Tube        |                          |                       |
| KA78L08ADTF    |         | Tape & Reel |                          |                       |
| KA78L12AD      |         | Tube        |                          |                       |
| KA78L12ADTF    |         | Tape & Reel |                          |                       |
| KA78L05AAZTA   | TO-92   | Ammo        |                          |                       |
| KA78L05AAZBU   |         | Bulk        |                          |                       |

Note:

- For information on tape & reel and ammo pack specifications, including part orientation and tape sizes, please refer to our tape and reel data, [www.fairchildsemi.com/products/analog/pdf/to92r\\_tr.pdf](http://www.fairchildsemi.com/products/analog/pdf/to92r_tr.pdf).



*Electrónica S.A. de C.V.*

KA78LXXA/KA78L05AA

---

#### **DISCLAIMER**

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

#### **LIFE SUPPORT POLICY**

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

[www.fairchildsemi.com](http://www.fairchildsemi.com)