

Single-Phase Bridge Rectifier 15.0A KBPC Package

KBPC15 Series

MERITEK

FEATURE

- Operating Temperature: -55 ~ +150°C
- Average Forward Rectified Output Current 15.0A
- Repetitive Reverse Voltage from 50~1000V
- Surge Overload Ratings to 300A
- Metal Case
- Hole for # 10 Screw
- Flammability Classification 94V-0
- UL Safety Approved: Certification No: E223027



MAXIMUM RATINGS AND THERMAL CHARACTERISTICS




Parameter	Code	KBPC 15005	KBPC 1501	KBPC 1502	KBPC 1504	KBPC 1506	KBPC 1508	KBPC 1510	Unit
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Bridge Input Voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Output Current	I_F	15, $T_A=55^{\circ}C$							A
Peak Forward Surge Current Single Sine-Wave Superimposed on Rated Load (JEDEC Method)	I_{FSM}	300							A
Rating for Fusing ($t < 8.3ms$)	I^2t	374							A ² sec
Maximum Instantaneous Forward Voltage Drop per Diode	V_F	1.0, $I_F=7.5A$							V
Maximum DC Reverse Current at Rated DC Blocking Voltage per Element	I_R	10, $T_A=25^{\circ}C$							μA
	I_R	500, $T_A=125^{\circ}C$							μA
Isolation Voltage from Case to Leads	V_{IS}	2500							VAC
Operating Junction and Storage Temperature	T_J, T_{STG}	-55~150							$^{\circ}C$
Typical Thermal Resistance per Element	$R_{\theta JA}$	2.1							$^{\circ}C/W$

Note:

1. Rating at 25°C ambient temperature unless otherwise specified. Resistive or Inductive load, 60Hz. For Capacitive load derate current by 20%.
2. Thermal resistance from Junction to Ambient on P.C. board mounting.

DIMENSION AND PIN CONFIGURATION

Item	Min. (mm)	Max. (mm)
A	28.30	28.80
B	15.70	16.70
C	17.60	18.60
D	13.80	14.80
E	0.78	
F	DIA. 5.10	DIA. 5.60
G	6.35	
H	10.97	11.23
K	22.80	25.40

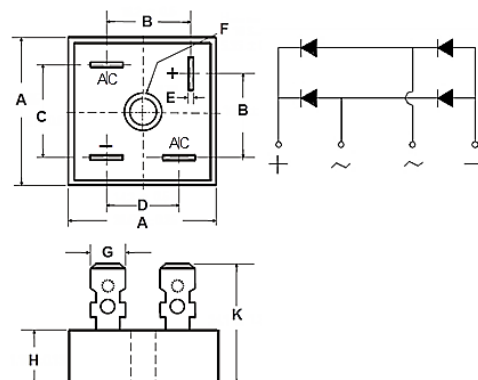

Single-Phase Bridge Rectifier


15.0A KBPC Package

KBPC15 Series


MERITEK

RATING AND CHARACTERISTIC CURVES


Derating Curve for Output Rectified Current

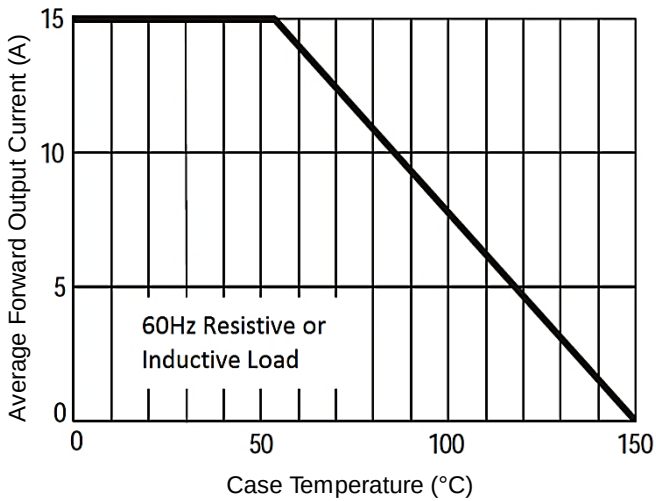


Maximum Non-Repetitive Peak Forward Surge Current

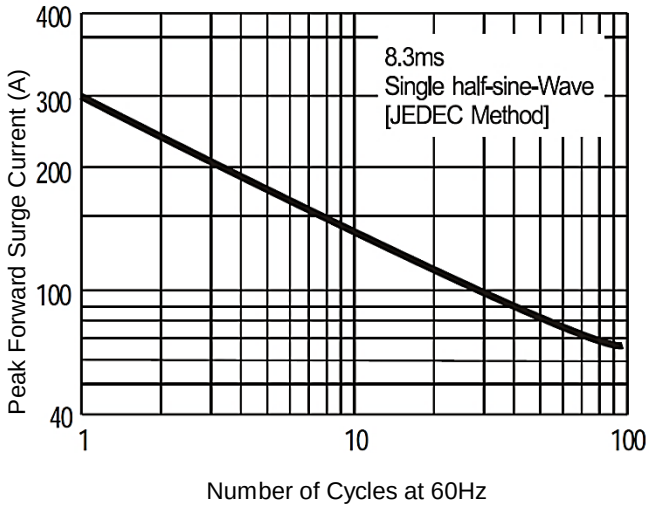

Typical Instantaneous Forward Characteristics

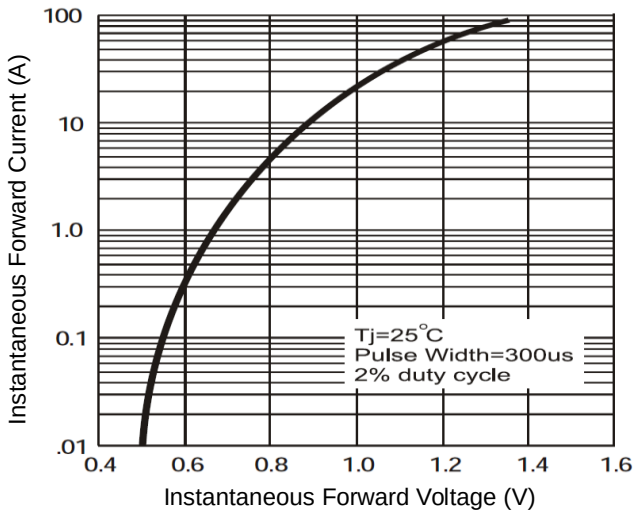

Typical Reverse Characteristics at T_j=25°C

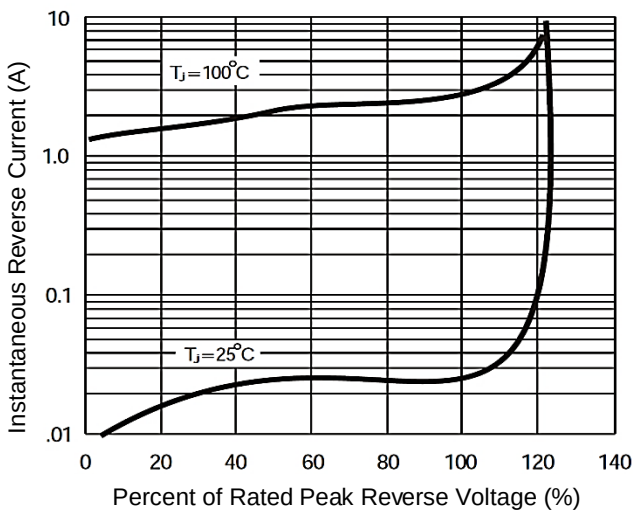

*Specifications subject to change without notice.