


HIGH POWER AMPLIFIER APPLICATION.

FEATURES

- Recommended for 45 ~ 50W Audio Frequency Amplifier Output Stage.
- Complementary to KTB688.

MAXIMUM RATING (Ta=25°C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	V _{CB0}	120	V
Collector-Emitter Voltage	V _{CEO}	120	V
Emitter-Base Voltage	V _{EBO}	5	V
Collector Current	I _C	10	A
Base Current	I _B	1	A
Collector Power Dissipation (Tc=25°C)	P _C	80	W
Junction Temperature	T _j	150	°C
Storage Temperature Range	T _{stg}	-55 ~ 150	°C

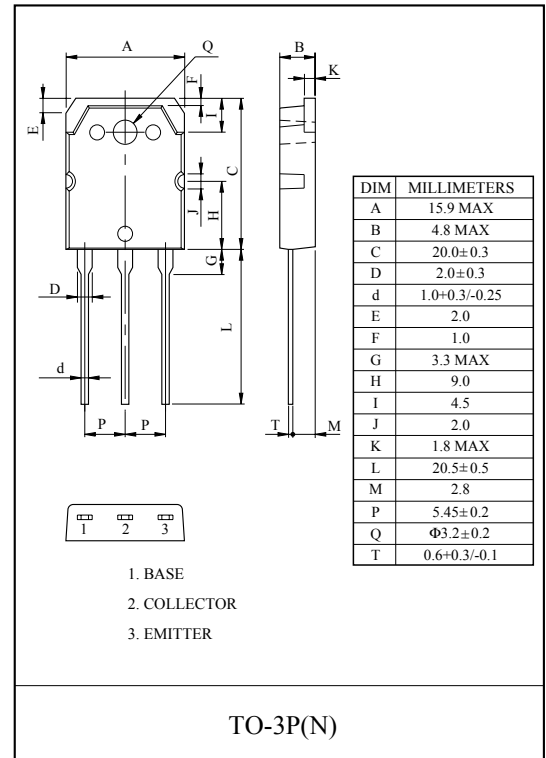


ELECTRICAL CHARACTERISTICS (Ta=25°C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current	I _{CB0}	V _{CB} =120V, I _E =0	-	-	10	μA
Emitter Cut-off Current	I _{EBO}	V _{EB} =5V, I _C =0	-	-	10	μA
Collector-Emitter Breakdown Voltage	V _{(BR)CEO}	I _C =50mA, I _B =0	120	-	-	V
DC Current Gain	h _{FE} (Note)	V _{CE} =5V, I _C =1A	55	-	160	
Collector-Emitter Saturation Voltage	V _{CE(sat)}	I _C =6A, I _B =0.6A	-	-	2.0	V
Base-Emitter Voltage	V _{BE}	V _{CE} =5V, I _C =5A	-	-	1.5	V
Transition Frequency	f _T	V _{CE} =5V, I _C =1A	-	12	-	MHz
Collector Output Capacitance	C _{ob}	V _{CB} =10V, I _E =0, f=1MHz	-	170	-	pF


Note : h_{FE} Classification R:55 ~ 110, O:80 ~ 160

KTD718


$I_C - V_{CE}$

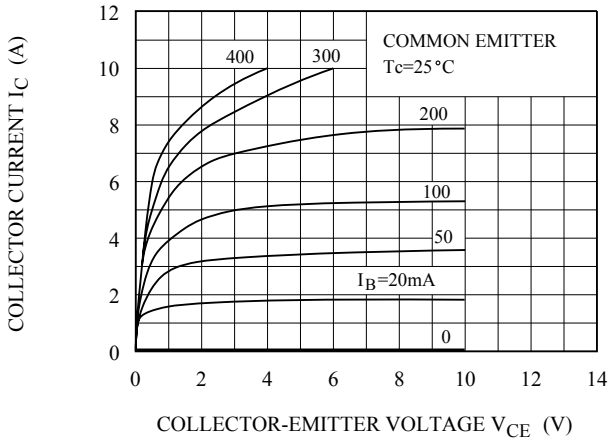


$h_{FE} - I_C$

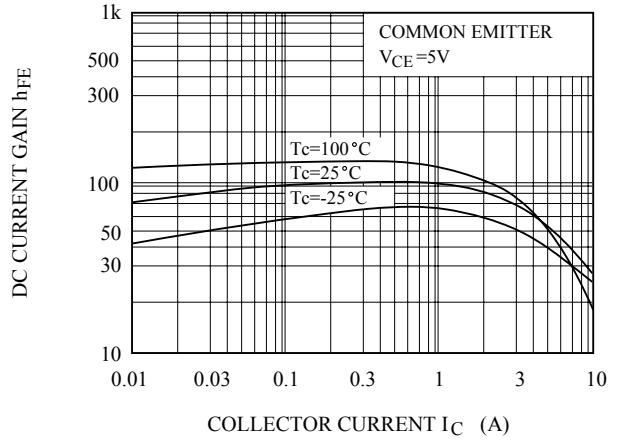


$V_{CE(sat)} - I_C$

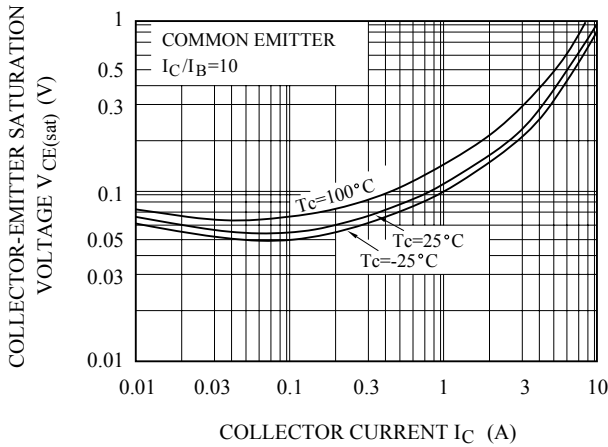

SAFE OPERATING AREA

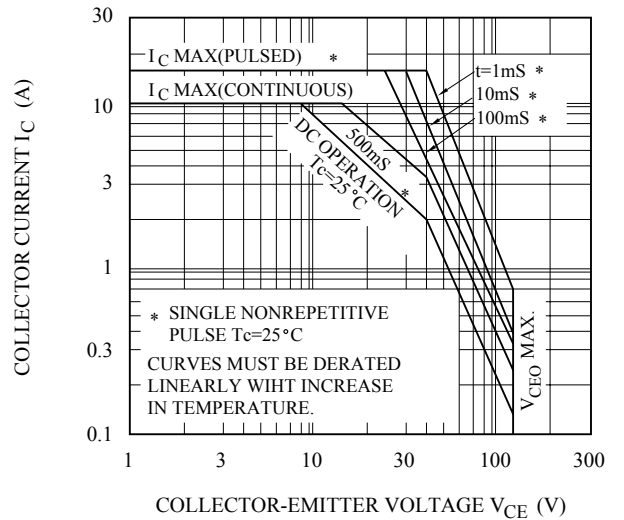

$P_c - T_a$

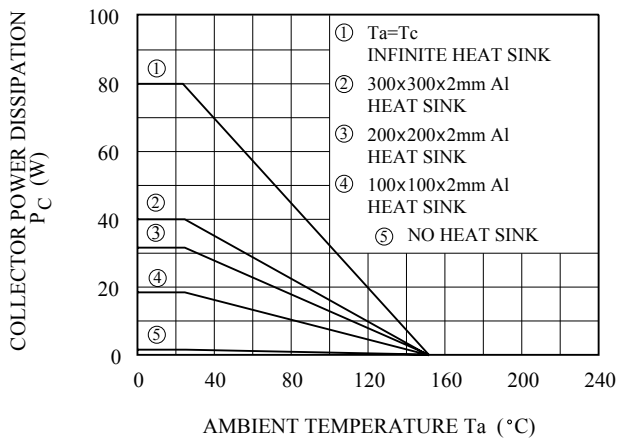

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.