


LED DIP 10mm



LED DIP 10mm

LED-Y10D-PP-R30/S

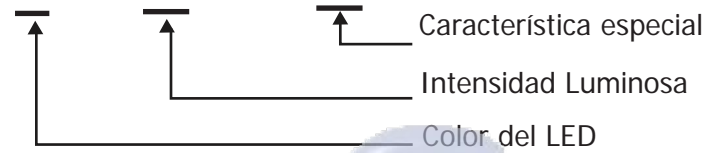

Especificaciones

Tipo de LED: DIP 10 mm

Angulo de apertura: 15° a 30°

Encapsulado transparente

Temperatura de operación: - 40 a 70 °C

Corriente nominal: 20mA

Y	Colores disponibles	Longitud de onda [nm] / TC [K]	Voltaje de Operación [V]		Consumo [mW]	PP		Intensidad Luminosa [mcd]					
			Min	Max		AD	AC	B		SB		UB	
R	R	600-650	2.0	2.4	40	-	-	-	-	1000	3700	10000	13800
G	G	490-540	3.2	4.0	40	-	-	-	-	-	-	8000	13800
B	B	450-500	3.2	4.0	40	-	-	-	-	-	-	4900	6300
Y	Y	550-600	2.0	2.4	40	-	-	800	3700	3000	12000	5000	13800
O	O	600-650	2.0	2.4	40	-	-	-	-	-	-	2500	8000
W	W	5000-10000K	3.0	3.4	40	-	-	-	-	-	-	10000	23400
PK	PK	430-440	2.0	2.4	40	-	***	-	-	-	-	-	-
SP	SP	380-420	3.0	3.4	40	-	***	-	-	-	-	-	-
RGB	RGB	630-525-475	3.0	3.4	40	-	***	-	-	-	-	-	-

Los datos mostrados son unicamente de referencia, éstos pueden variar entre lotes diferentes.
 *** LEDs de uso general como Indicadores

Características Especiales

S = 4P (4 pines)

S = A Ánodo común

S = K Ánodo común

Aplican solo para LEDs RGB

Encapsulado Transparente



Dimensiones

