

SHINDENGEN

Power Switching Regulators


MA2000 Series

MA2830

OUTLINE DIMENSIONS

Case : MA7

Unit : mm

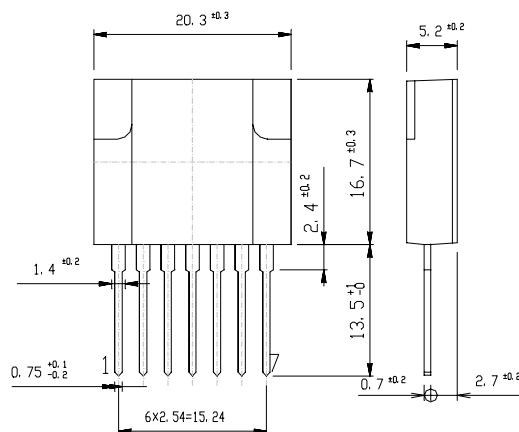

RATINGS

●Absolute Maximum Ratings

Item	Symbol	Conditions	Ratings		Unit
			P Class	N Class	
Storage Temperature	Tstg		-30~125	-30~125	°C
Operating Temperature	Top	Case Temperature	-20~125	-20~125	°C
Junction Temperature	Tj		150	150	°C
Peak Input Voltage	Vin	②+,④-,Fig.1 is Measurement Circuit of Peak Input Voltage Vin and Collector Cutoff Current I _{CEX} .	850	850	V
Input Current	Iin	Pulse Pulse Width 150 μs MAX, Duty 1/2, Sawtooth Wave, Peak Value, ②+,④-	8	8	A
Maximum Operating Frequency	f(max)		200	200	kHz
Maximum Power Dissipation	P _D	Ta=25°C	3	3	W
	P _D	Heatsink Tc=100°C	22	22	W
Dielectric Strength	Vdis	Terminals To Case AC 1 min	2	2	kV
Insulation Resistance		Terminals To Case 500VDC	100	100	MΩ
Fold Back Control Voltage	V _{CONT(max)}	Fold Control Resistance=0Ω Duty 1/2, ④,⑦	±8	±8	V
Fold Back Control Current	I _{CONT(max)}	④-,⑥+	100	100	mA

●Electrical Characteristics (Tc=25°C)

Item	Symbol	Conditions	Ratings		Unit
			P Class	N Class	
Q1	Collector Cutoff Current	I _{CEX} V _{CE} =850V, Fig.1 is Measurement Circuit of Peak Input Voltage Vin and Collector Cutoff Current I _{CEX} , ②+,④-	MAX 0.1	MAX 0.1	mA
	DC Current Gain	h _{FE} V _{CE} =5V, I _C =3.0A, ②+,④-,⑤I _B	13~26	8~16	
	Collector to Emitter Saturation Voltage	V _{CE(sat)} I _C =3.0A, I _B =0.6A, ②+,④-,⑤I _B	MAX 1.0	MAX 1.0	V
	Thermal Resistance	θ _{jc} Junction to Case	MAX 2.26	MAX 2.26	°C/W
D1	Reverse Current	I _R V _R =800V, ①+,②-	MAX 10	MAX 10	μA
	Forward Voltage	V _F I _F =0.6A, ①-,②+	MAX 1.7	MAX 1.7	V
			MIN 1.7	MIN 1.7	
Driving Saturation Voltage	V _{D(sat)}	I _C =1.5A, I _B =0.3A, ⑤+,④-	MAX 2.3	MAX 2.3	V

MA2830

●Standard Operating Condition•Design Standard For Application Circuit

Item	Conditions	Ratings		Unit
		P Class	N Class	
Input Rated Voltage		AC90~274	AC90~274	V
Output Nominal Wattage		50	50	W
Output Nominal Voltage		12	12	V
Output Nominal Current		4	4	A

●Standard Operating Condition•Standard Operating Characteristics (Ta=25°C)

Item		Conditions	Ratings		Unit	
			P Class	N Class		
Minimum Input Full Load Output Voltage		Vin=90V, IO=4A	12.0±0.6	12.0±0.6	V	Fig 2, ① Refer
Maximum Input Light Load Output Voltage		Vin=274V, IO=0.4A	12.0±0.6	12.0±0.6	V	Fig 2, ② Refer
AC Input Voltage		IO=4A	MAX 85	MAX 85	V	
Over Current Protection	Foldback Current	Vin=274V, VO=10V	MAX 7	MAX 7	A	Fig 2, ③ Refer
	Short Circuit	Vin=274V, RO=0.5Ω	Nodamage To Any Device, Automatic Recovery.		-	Fig 2, ④ Refer
Output Ripple Noise		Vin=90~274V, IO=0.4~4A	MAX 150	MAX 150	mV P-P	

Figure in ○=Terminal Sign

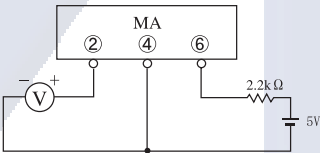


Fig1. Measurement Circuit






Fig2. Output Voltage/Current


Electrónica S.A. de C.V.

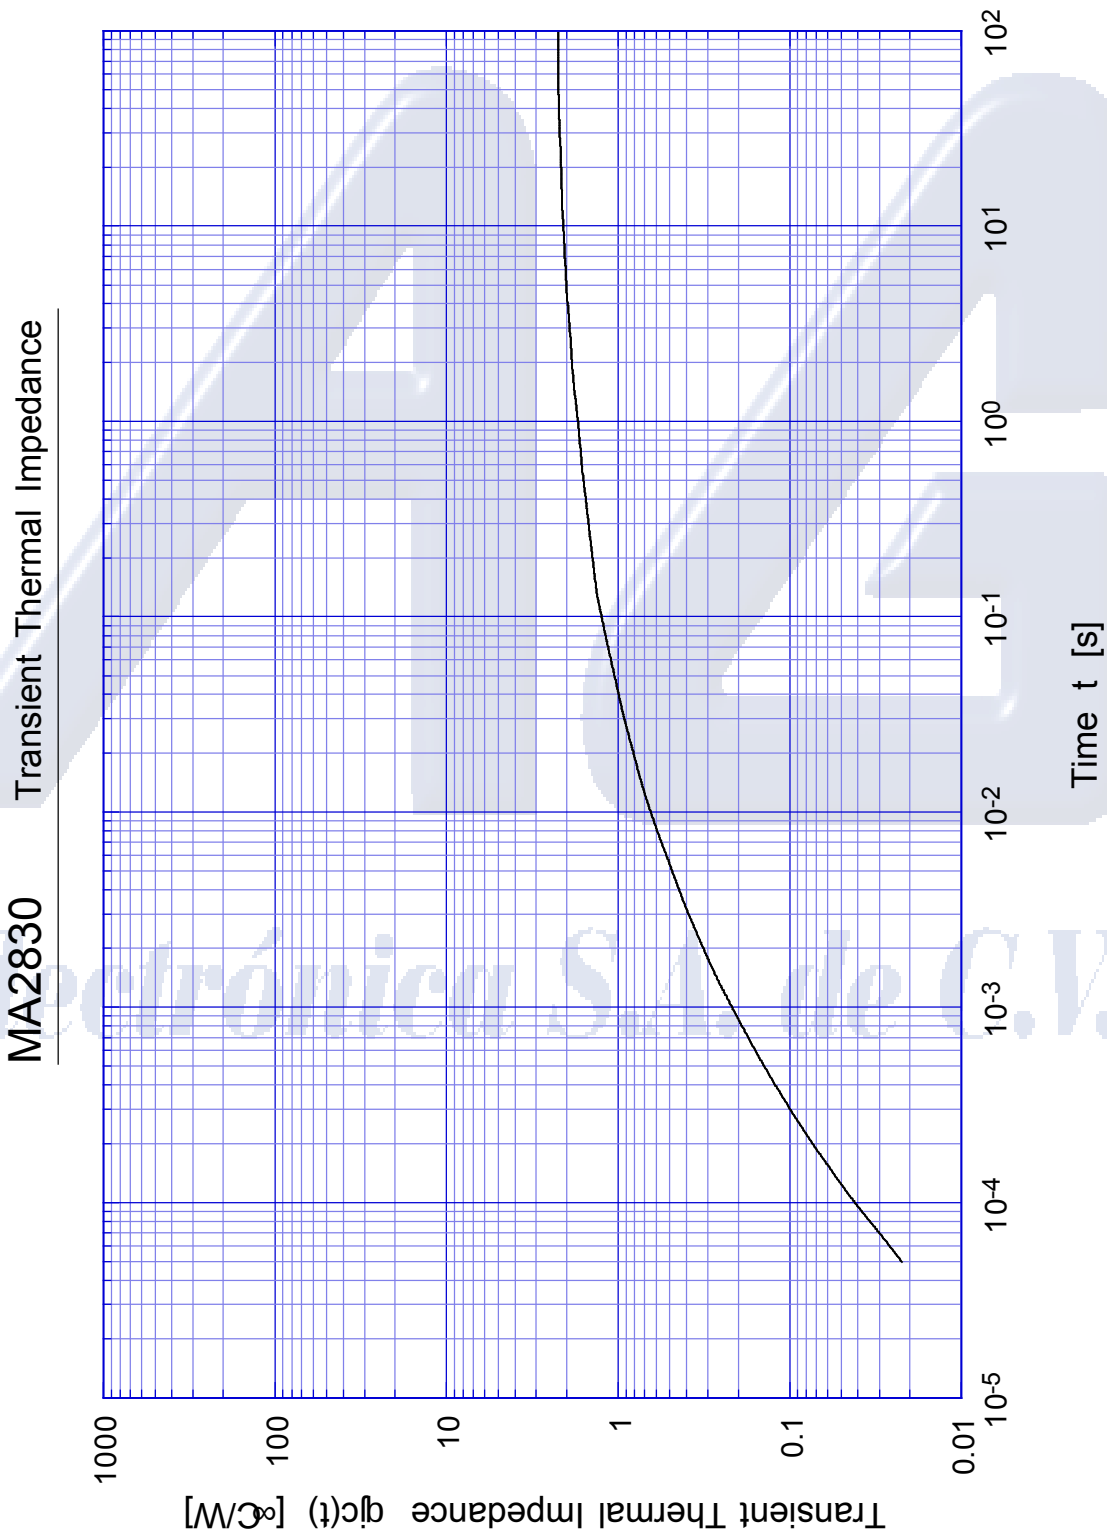

MA2830

Forward Bias SOA

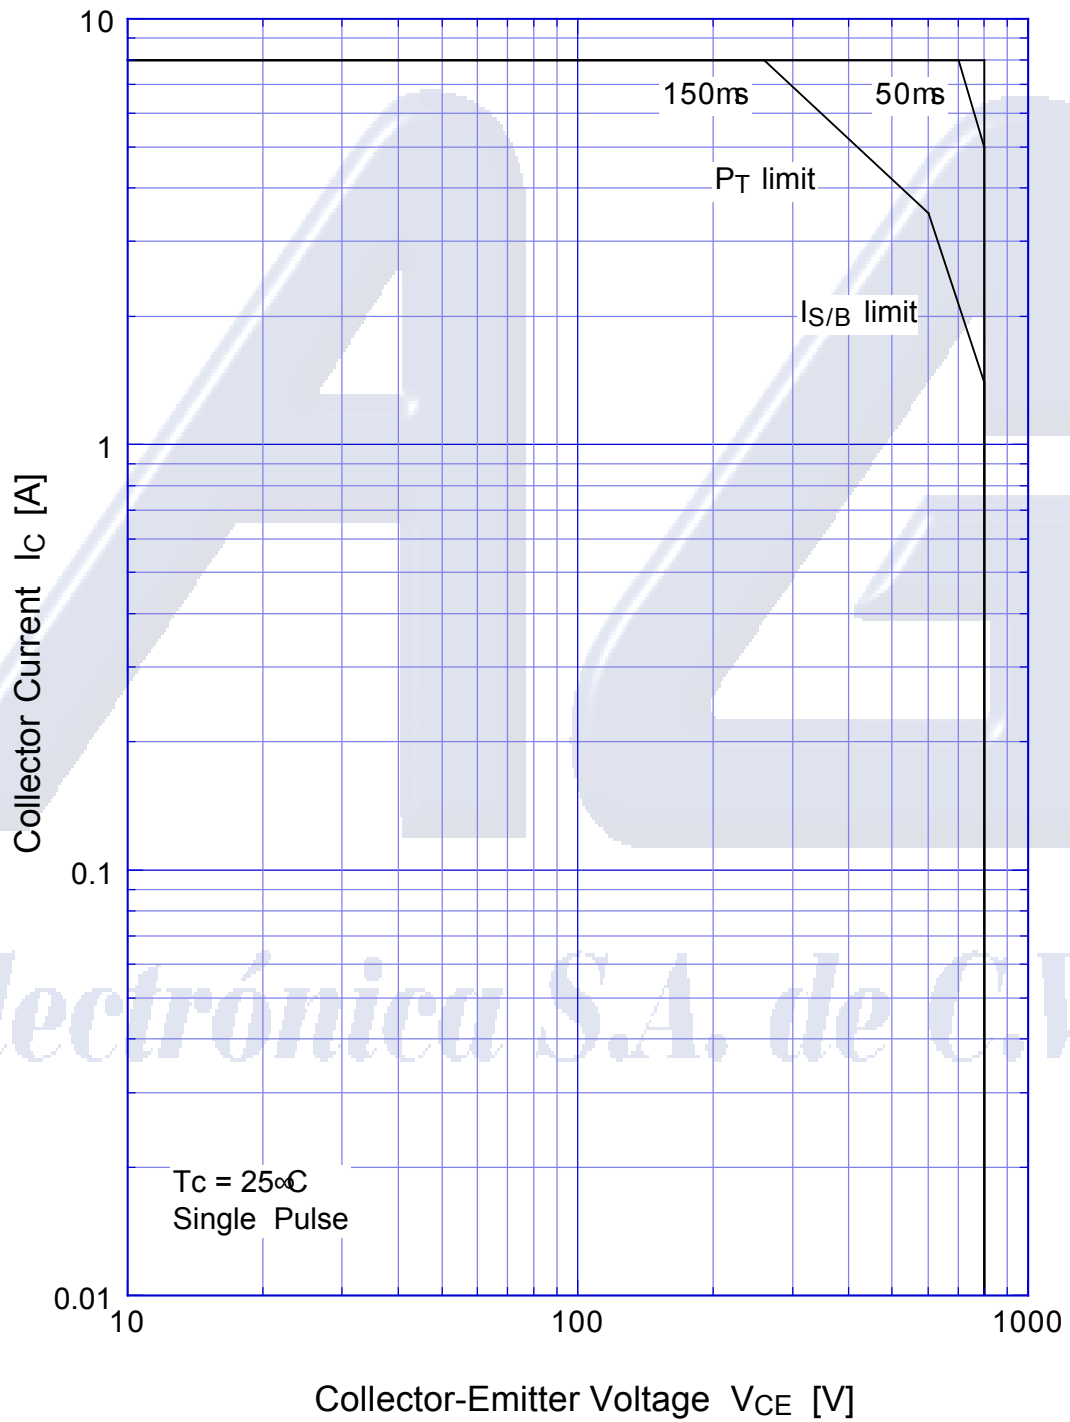

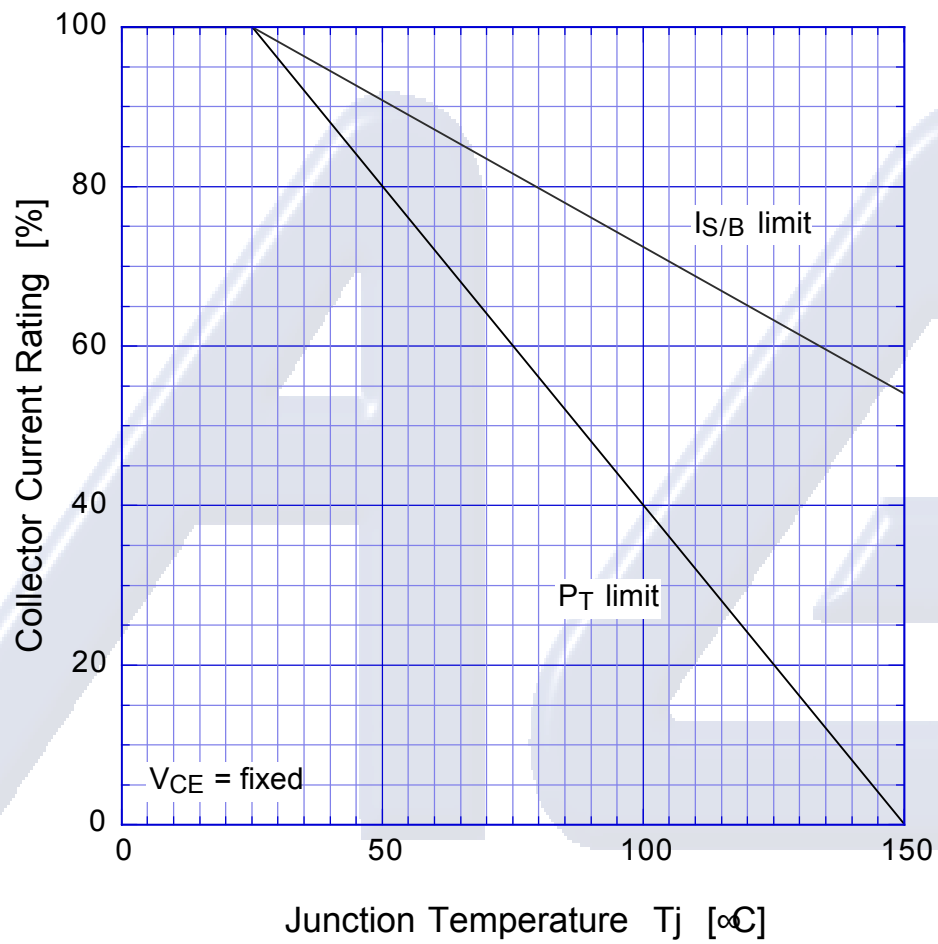MA2830**Collector Current Derating**

Electrónica S.A. de C.V.

MA2830

Reverse Bias SOA

