www.agelectronica.com
www.agelectronica.com

FAIRCHILD
SEMICONDUCTOR®

2N5551 / MMBT5551
NPN General Purpose Amplifier

Features

- This device is designed for general purpose high voltage amplifiers and gas discharge display drivers.
- Suffix “-C” means Center Collector in 2N5551 (1. Emitter 2. Collector 3. Base)
- Suffix “-Y” means h_{FE} 180~240 in 2N5551 (Test condition : I_C = 10mA, V_{CE} = 5.0V)

2N5551

TO-92

MMBT5551



SOT-23
Marking: 3S
1. Base 2. Emitter 3. Collector

Absolute Maximum Ratings * T_A = 25°C unless otherwise noted

Symbol	Parameter	Value	Units
V_{CEO}	Collector-Emitter Voltage	160	V
V_{CBO}	Collector-Base Voltage	180	V
V_{EBO}	Emitter-Base Voltage	6.0	V
I_C	Collector current - Continuous	600	mA
T_J, T_{stg}	Junction and Storage Temperature	-55 to +150	°C

Electrónica S.A. de C.V.

* These ratings are limiting values above which the serviceability of any semiconductor device may be impaired.

NOTES:

1. These ratings are based on a maximum junction temperature of 150 degrees C.
2. These are steady state limits. The factory should be consulted on applications involving pulsed or low duty cycle operations.

Thermal Characteristics T_A=25°C unless otherwise noted

Symbol	Parameter	Max		Units
		2N5551	*MMBT5551	
P_D	Total Device Dissipation Derate above 25°C	625 5.0	350 2.8	mW mW/°C
$R_{\theta JC}$	Thermal Resistance, Junction to Case	83.3		°C/W
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient	200	357	°C/W

* Device mounted on FR-4 PCB 1.6" × 1.6" × 0.06."

www.agelectronica.com
www.agelectronica.com

www.agelectronica.com
www.agelectronica.com

Electrical Characteristics T_A = 25°C unless otherwise noted

Symbol	Parameter	Test Condition	Min.	Max.	Units
Off Characteristics					
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage *	I_C = 1.0mA, I_B = 0	160		V
$V_{(BR)CBO}$	Collector-Base Breakdown Voltage	I_C = 100μA, I_E = 0	180		V
$V_{(BR)EBO}$	Emitter-Base Breakdown Voltage	I_E = 10uA, I_C = 0	6.0		V
I_{CBO}	Collector Cutoff Current	V_{CB} = 120V, I_E = 0 V_{CB} = 120V, I_E = 0, T_A = 100°C		50 50	nA μA
I_{EBO}	Emitter Cutoff Current	V_{EB} = 4.0V, I_C = 0		50	nA
On Characteristics					
h_{FE}	DC Current Gain	I_C = 1.0mA, V_{CE} = 5.0V I_C = 10mA, V_{CE} = 5.0V I_C = 50mA, V_{CE} = 5.0V	80 80 30	 250 	
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	I_C = 10mA, I_B = 1.0mA I_C = 50mA, I_B = 5.0mA		0.15 0.20	V V
$V_{BE(sat)}$	Base-Emitter On Voltage	I_C = 10mA, I_B = 1.0mA I_C = 50mA, I_B = 5.0mA		1.0 1.0	V V
Small Signal Characteristics					
f_T	Current Gain Bandwidth Product	I_C = 10mA, V_{CE} = 10V, f = 100MHz	100		MHz
C_{obo}	Output Capacitance	V_{CB} = 10V, I_E = 0, f = 1.0MHz		6.0	pF
C_{ibo}	Input Capacitance	V_{BE} = 0.5V, I_C = 0, f = 1.0MHz		20	pF
H_{fe}	Small-Signal Current Gain	I_C = 1.0 mA, V_{CE} = 10 V, f = 1.0kHz	50	250	
NF	Noise Figure	I_C = 250 uA, V_{CE}= 5.0 V, R_S=1.0 kΩ, f=10 Hz to 15.7 kHz		8.0	dB

Electrónica S.A. de C.V.

Spice Model

NPN (Is=2.511f Xti=3 Eg=1.11 Vaf=100 Bf=242.6 Ne=1.249 Ise=2.511f Ikf=.3458 Xtb=1.5 Br=3.197 Nc=2 Isc=0 Ikr=0 Rc=1 Cjc=4.883p Mjc=.3047 Vjc=.75 Fc=.5 Cje=18.79p Mje=.3416 Vje=.75 Tr=1.202n Tf=560p Itf=50m Vtf=5 Xtf=8 Rb=10)

www.agelectronica.com
www.agelectronica.com

www.agelectronica.com
www.agelectronica.com

Typical Performance Characteristics

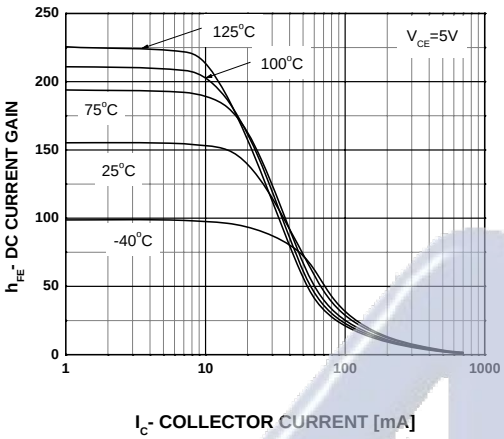

Figure 1. Typical Pulsed Current Gain vs Collector Current

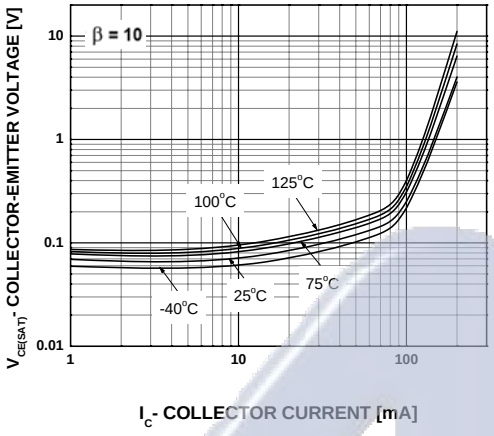

Figure 2. Collector-Emitter Saturation Voltage vs Collector Current

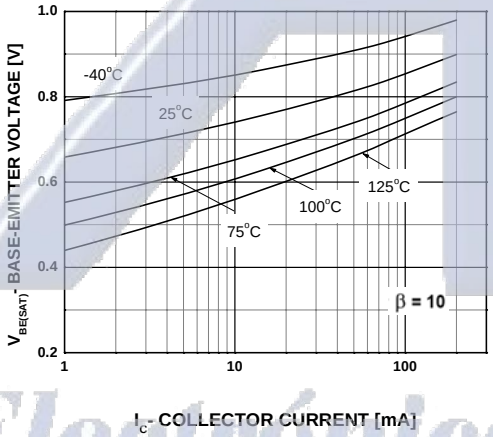

Figure 3. Base-Emitter Saturation Voltage vs Collector Current

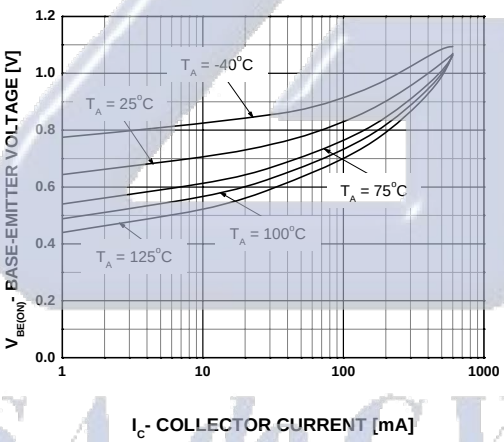

Figure 4. Base-Emitter On Voltage vs Collector Current

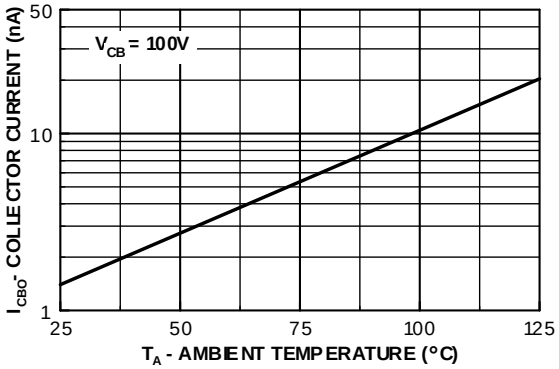

Figure 5. Collector Cutoff Current vs Ambient Temperature

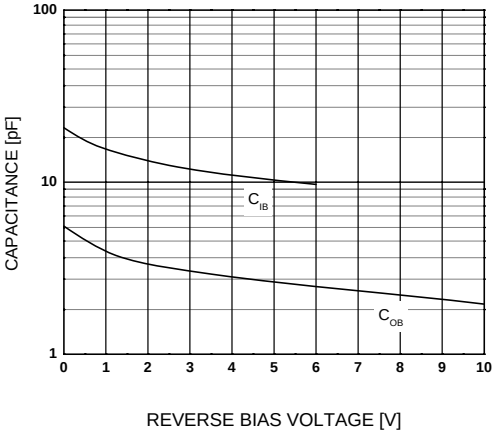

Figure 6. Input and Output Capacitance vs Reverse Voltage

www.agelectronica.com
www.agelectronica.com

www.agelectronica.com
www.agelectronica.com

Typical Performance Characteristics (Continued)

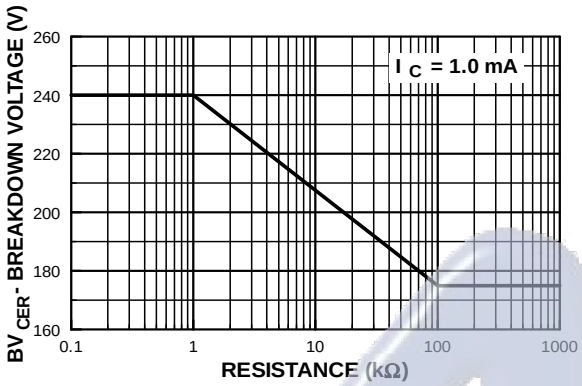

Figure 7. Collector- Emitter Breakdown Voltage with Resistance Between Emitter-Base

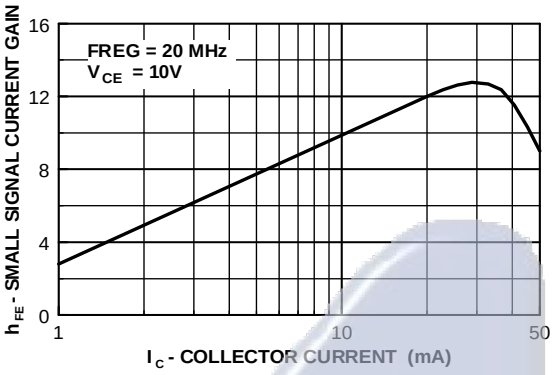

Figure 8. Small Signal Current Gain vs Collector Current

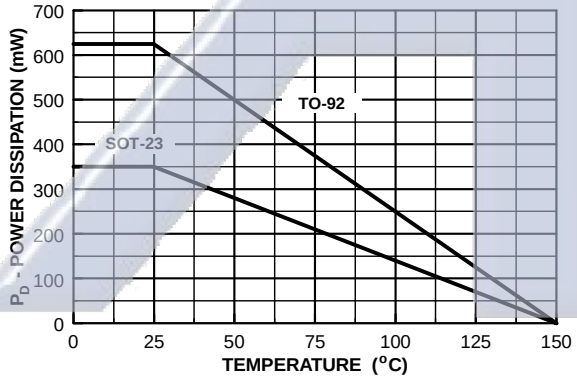

Figure 7. Power Dissipation vs Ambient Temperature

Electrónica S.A. de C.V.

www.agelectronica.com
www.agelectronica.com