

MN Deep Cycle Battery

MHB MN Series—Deep Cycle SLA Battery






- Completely sealed and maintenance-free, low self-discharge
- 100% precise quality testing, stable quality and high reliable performance
- Unique grid alloy formula, Gelled electrolyte formula and updated manufacturing technique
- Floating & standby use: up to 10 years
- Cycle use 1: Up to 400 cycles at 100% DOD
- Cycle use 2: Up to 650 cycles at 50% DOD

Application:

- Telecommunications
- Alarm and security system
- Uninterruptable Power Supply (UPS)
- Communication power supply
- Electric Power System (EPS)
- DC power supply
- Emergency backup power supply
- Auto control system


Construction:

- ComponentRaw material
- SealantEpoxy
- PositiveLead dioxide
- Safety valve Rubber
- NegativeLead
- TerminalCopper/Pb
- ContainerABS
- SeparatorFiber glass
- CoverABS
- Electrolyte Sulfuric acid

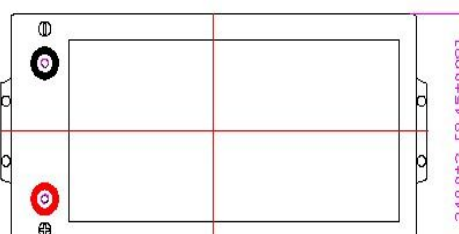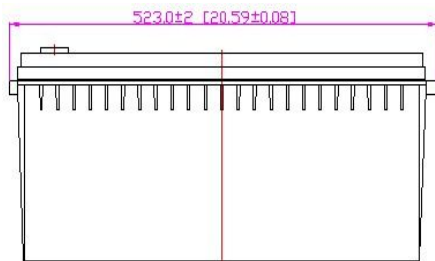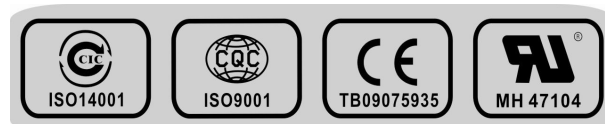

M8 Bolt & Nut

T16 Terminal



M8 Bolt


B5 Terminal

Speification:


Battery Model	MN 200-12 12V200AH			
Designed Floating Life	Up to 10Years			
Capacity (25℃)	20HR(10.61A,10.8V)	10HR(20.0A,10.8V)	5HR(38.9A,10.5V)	1HR(130.3A,10.5V)
	212.2AH	200.0AH	194.5AH	130.3AH
Dimensions	Length	Width	Height	Total Height
	523mm (20.59inch)	240mm (9.45inch)	219mm (8.62inch)	224mm (8.82inch)
Approx. Weight	60.00Kg ±3%			
Internal Resistance	Full charged at 25℃: ≤4.5mΩ			
Self Discharge	2% of capacity declined per month at (25℃)			
Capacity Affected by Temp.(20HR)	40℃	25℃	0℃	-15℃
	102%	100%	85%	65%
Charge Voltage(25oC)	Cycle use		Float use	
	14.4-14.6V(-30mV/℃), max. Current:60.0A		13.6-13.8V (-20mV/℃)	

FUJIAN MINHUA POWER SOURCE CO., LTD.


Terminal Voltage (V) and Discharge Time

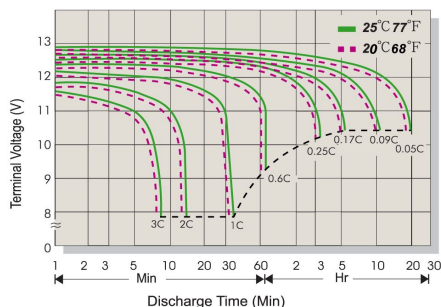


Capacity Retention Characteristic

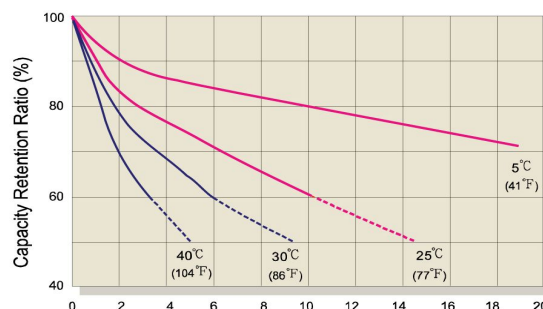


Battery Voltage and Charge Time for Standby Use

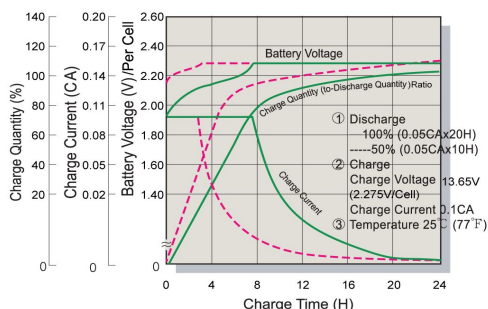


Battery Voltage and Charge Time for Cycle Use

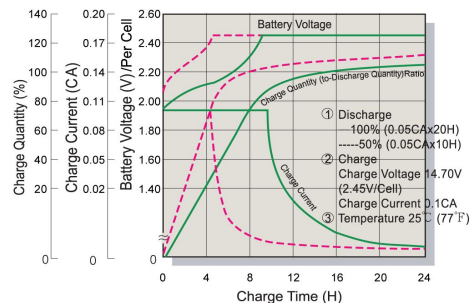

Tickle(or Float) Service Life

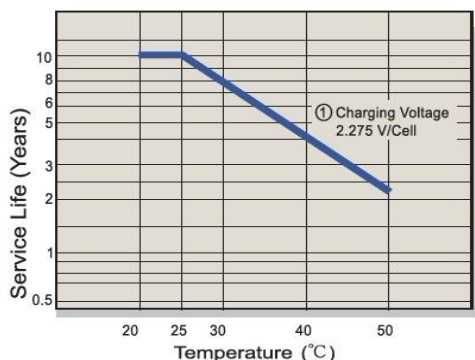

Cycle Service Life

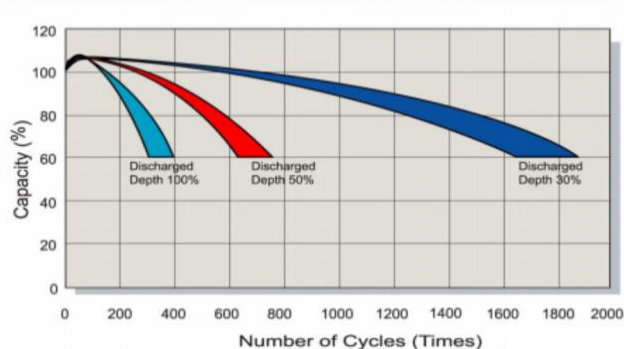

Constant Current Discharge(CC,Unit:A) at 25°C(77°F)

F.V/Time	5Min	10Min	15Min	30Min	1Hr	2Hr	3Hr	4Hr	5Hr	6Hr	10Hr	20Hr
1.85V/Cell	710.96	419.69	329.86	215.02	125.49	72.54	55.71	45.74	37.48	30.56	19.65	10.41
1.80V/Cell	724.54	427.71	336.16	219.13	127.89	73.93	56.77	46.62	38.20	31.14	20.00	10.61
1.75V/Cell	738.12	435.72	342.46	223.24	130.28	75.31	57.83	47.49	38.92	31.73	20.40	10.81
1.70V/Cell	804.55	461.87	363.01	232.14	132.58	76.64	58.85	48.33	39.60	32.28	20.76	11.00
1.67V/Cell	885.75	501.08	393.83	245.11	134.00	77.46	59.48	48.84	40.03	32.63	20.98	11.12

Constant Power Discharge (CP,Unit:W) at 25°C(77°F)

F.V/Time	5Min	10Min	15Min	30Min	1Hr	2Hr	3Hr	4Hr	5Hr	6Hr	10Hr	20Hr
1.85V/Cell	1386.3	818.39	643.22	419.29	244.71	141.46	108.62	89.20	73.09	59.59	38.32	20.31
1.80V/Cell	1412.8	834.03	655.51	427.30	249.38	144.16	110.70	90.90	74.49	60.73	39.00	20.70
1.75V/Cell	1439.3	849.66	667.80	435.31	254.05	146.86	112.78	92.61	75.89	61.86	39.78	21.08
1.70V/Cell	1568.8	900.64	707.86	452.68	258.53	149.44	114.76	94.24	77.22	62.95	40.48	21.45
1.67V/Cell	1727.2	977.11	767.96	477.97	261.30	151.05	115.99	95.25	78.05	63.63	40.91	21.68