


OKY3402-2

CARGADOR DE ENTRADA MICRO USB Y PUERTO D1 PARA BATERÍAS DE LITIO 1A

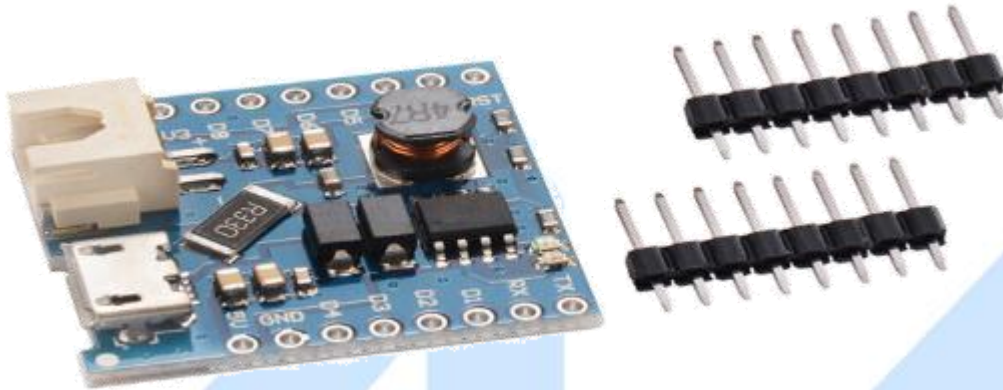

Product Description

Charging, when the battery run out, you do not need to unplug the battery, just using usb port to charging.

1. Connect to lithium Battery (normal 3.3-4.2V)
2. Charging port (normal 5V)
3. Green LED, lights when charging is completed
4. Red LED, lights when charging

J1: setting max charging current, 0.5A or 1A.

 AG Electrónica ¿Qué vamos a innovar hoy?	AG Electrónica S.A.P.I. de C.V. República del Salvador N° 20 Segundo Piso Teléfono: 55 5130 - 7210		
	ACOTACIÓN: N/A	http://www.agelectronica.com	REALIZO: VJSR REV:VJSR
TOLERANCIA: N/A	CARGADOR DE ENTRADA MICRO USB Y PUERTO D1 PARA BATERÍAS DE LITIO 1A		
TOLERANCIA: N/A	Fecha: 27/12/2019	No. Parte: OKY3402-2	