



OKY3603: MODULO DE CARGA 4s PARA BATERIAS DE LITIO 18650

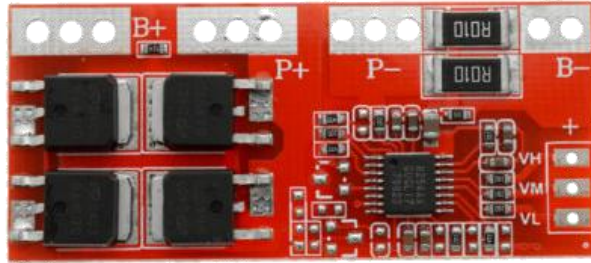

Description

4 string 18650 lithium battery overcharge and over discharge overcurrent short circuit protection board module 3.7/12V

- Module nature: polymer lithium battery protection board
- Overcharge detection voltage: $4.25 \pm 0.025V$
- Overcharge release voltage: $4.15 \pm 0.05V$
- Over-discharge detection voltage: $2.50 \pm 0.08V$
- Over discharge release voltage: $3.00 \pm 0.1V$
- Overcurrent: 20-30A
- Working current: 15A (natural heat dissipation 10A, plus heat sink 15A, maximum instantaneous current 30A)
- Release condition: The protection condition is automatically restored without activation (optional charger activation)
- Main functions: overcharge protection function, over discharge protection function, short circuit protection function over current protection.
- Working temperature: $-40 \sim +85$ degrees (enhance heat dissipation when the ambient temperature is too high)
- Wiring method: welding output
- Module size: 50mm*22mm*4mm

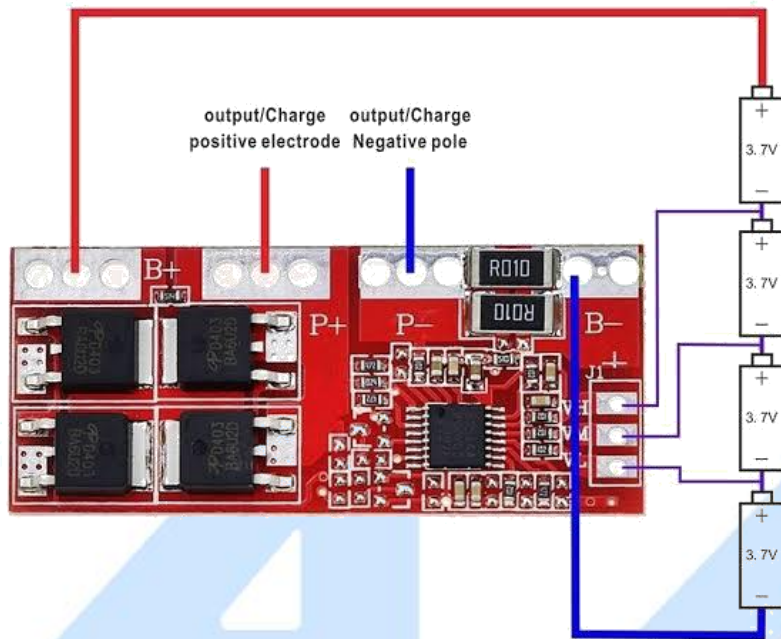

AG

Electrónica

¿Qué vamos a innovar hoy?

	AG Electrónica S.A.P.I DE C.V República del Salvador N° 20 Segundo Piso Teléfono: 5130 - 7210		
	ACOTACIÓN: N/A	http://www.agelectronica.com/	ESCALA: N/A
TOLERANCIA: N/A	MÓDULO DE CARGA 4s PARA BATERIAS DE LITIO		
TOLERANCIA: N/A	Fecha: 07/01/2020	No. Parte: OKY3603	