

Rechargeable Sealed Lead-Acid Battery

PS-1208



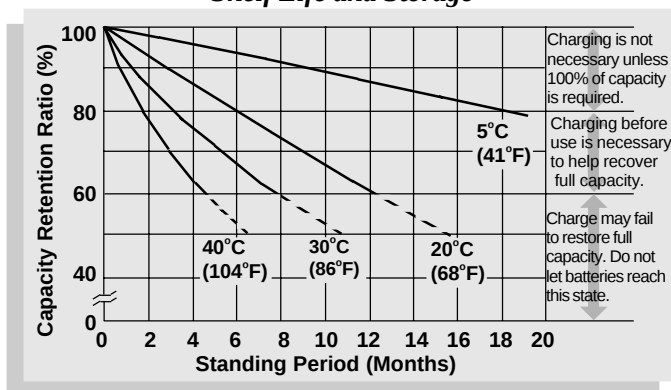
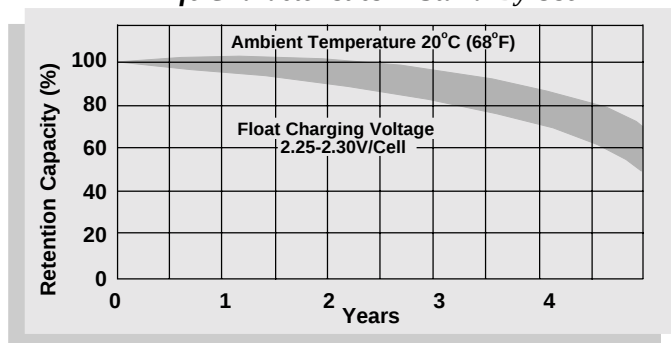
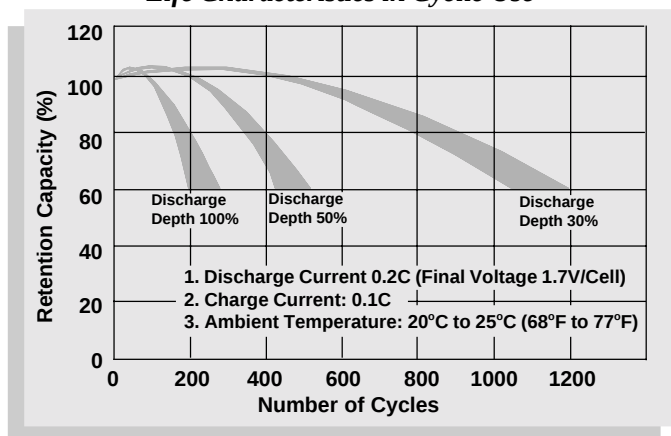
Power-Sonic rechargeable batteries are lead-lead dioxide systems. The dilute sulphuric acid electrolyte is suspended and thus immobilized. Should the battery be accidentally overcharged producing hydrogen and oxygen, special one-way valves allow the gases to escape thus avoiding excessive pressure build-up. Otherwise, the battery is completely sealed and is, therefore, maintenance-free and leak proof.

PS-1208 is air transport approved, and meets all current requirements set forth by the C.A.B., F.A.A., I.A.T.A. and D.O.T.

U.L. recognizes model PS-1208 under file number MH 14328.

PERFORMANCE SPECIFICATIONS

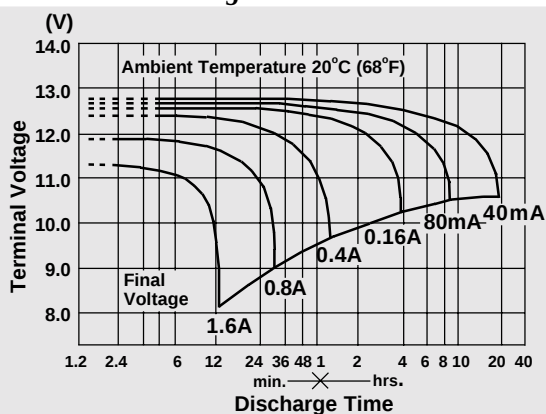
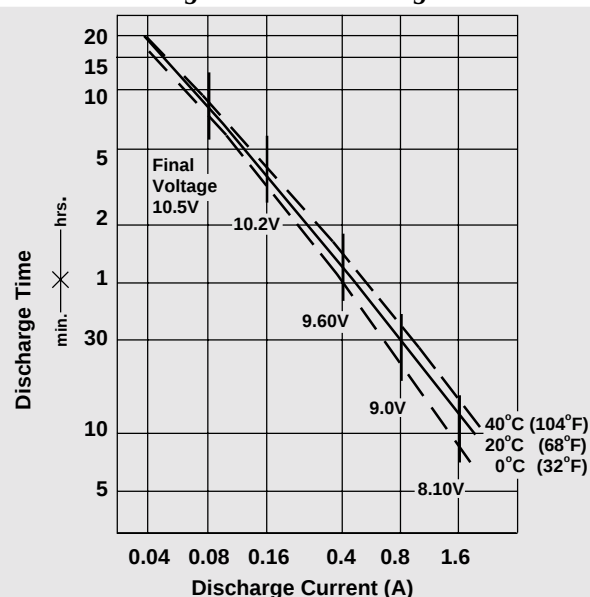
Nominal Voltage.....	12 volts (6 cells in series)
Nominal Capacity	
20 hour rate (40mA to 10.50 volts)	0.80 A.H.
10 hour rate (72mA to 10.50 volts)	0.72 A.H.
5 hour rate (130mA to 10.20 volts)	0.65 A.H.
1 hour rate (480mA to 9.00 volts)	0.48 A.H.
Approximate Weight.....	0.80 pounds (0.35 kg)
Energy Density (20 hour rate).....	1.07 Watt-hours/cubic inch (64.5 Watt-hours/l)
Specific Energy (20 hour rate).....	12.0 Watt-hours/pound (27.4 Watt-hours/kg)
Internal Resistance (Fully Charged Battery).....	150 milliohms (approximately)
Maximum Discharge Current (≤ 7 Min.).....	2.4 amperes
Maximum Short-Duration Discharge Current (≤ 10 Sec.).....	8.0 amperes
Terminals.....	Leads terminated with free hanging AMP. INC MATE-N-LOK connector Socket housing 1-480318-0 mates with pin housing 1-480319-0
Vibration Test (2000 cycles/minute, 0.10 inch excursion, 2 hours).....	No loss in capacity or performance
Shelf Life — % of nominal capacity at 68° F (20° C)	
1 Month.....	97%
3 Months.....	91%
6 Months.....	83%
Operating Temperature Range	
Charge.....	-4°F (-20°C) to 122°F (50°C)
Discharge.....	-4°F (-20°C) to 140°F (60°C)
Case.....	ABS Plastic (Acrylonitrile Butadiene Styrene Copolymer)

Shelf Life and Storage**Life Characteristics in Stand-By Use****Life Characteristics in Cyclic Use****CHARGING**

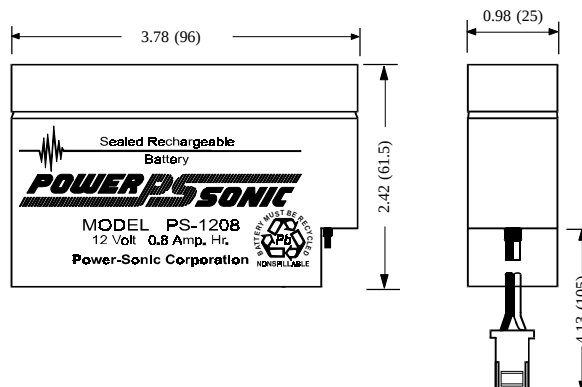
Cycle Applications: Limit initial current to 160mA. Charge until battery voltage (under charge) reaches 14.40 to 14.70 volts at 68°F (20°C). Hold at 14.40 to 14.70 volts until current drops to approximately 8mA. Battery is fully charged under these conditions, and charger should either be disconnected or switched to "float" voltage.

"Float" or "Stand-By" Service: Hold battery across constant voltage source of 13.50 to 13.80 volts continuously. When held at this voltage, the battery will seek its own current level and maintain itself in a fully charged condition.

NOTE: Due to the self-discharge characteristics of this type of battery, it is imperative that they be charged after 6-9 months of storage, otherwise permanent loss of capacity might occur as a result of sulfation.

Discharge Characteristics**Discharge Time vs. Discharge Current**

Physical Dimensions: in. (mm)



Tolerances are +/- 0.04 in. (+/- 1mm) and +/- 0.08 in. (+/- 2mm) for height dimensions.