



Features


- 1/4" Quick-Connect terminals on top
- Printed Circuit terminals on bottom
- Flange mount (F-suffix)
- Rugged, miniature construction
- Single-Pole switching
- Epoxy Sealed

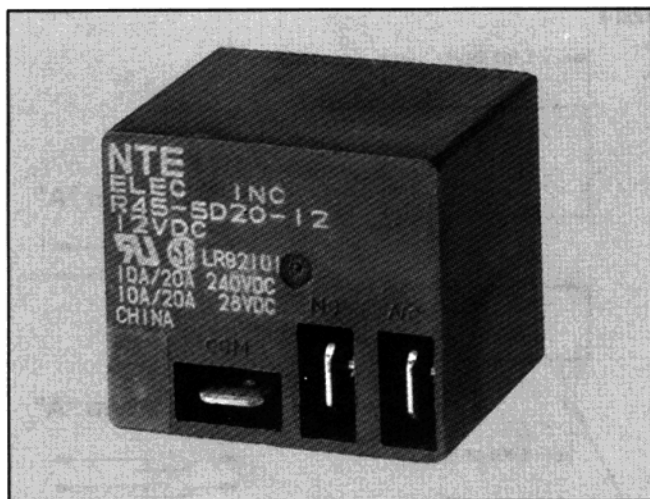

SPST-NO, 1 Form "A"



SPDT, 1 Form "C"





DC OPERATED

	NTE Type No.	Nom. Volt.	Contact Arr.	Coil Res. Ohms (Typ)	Nom. Power	Max. Contact Current @ 28VDC 240VAC	Diag No.
	R45-1D30-5/6	5VDC	SPST-NO	28	900mW	30A	D42a
NEW	R45-1D30-5/6F	5VDC	SPST-NO	28	900mW	30A	D42b
	R45-1D30-12	12VDC	SPST-NO	155	900mW	30A	D42a
NEW	R45-1D30-12F	12VDC	SPST-NO	155	900mW	30A	D42b
	R45-1D30-24	24VDC	SPST-NO	660	900mW	30A	D42a
NEW	R45-1D30-24F	24VDC	SPST-NO	660	900mW	30A	D42b
	R45-5D20-5/6	5VDC	SPDT	28	600mW	20A	D42a
NEW	R45-5D20-5/6F	5VDC	SPDT	28	600mW	20A	D42b
	R45-5D20-12	12VDC	SPDT	155	600mW	20A	D42a
NEW	R45-5D20-12F	12VDC	SPDT	155	600mW	20A	D42b
	R45-5D20-24	24VDC	SPDT	660	600mW	20A	D42a
NEW	R45-5D20-24F	24VDC	SPDT	660	600mW	20A	D42b

R45 Series



Industrial, Printed Circuit Mount, SPST and SPDT, 20Amp and 30Amp Relays for use in Machinery, Major Appliance, and Air Conditioning Controls

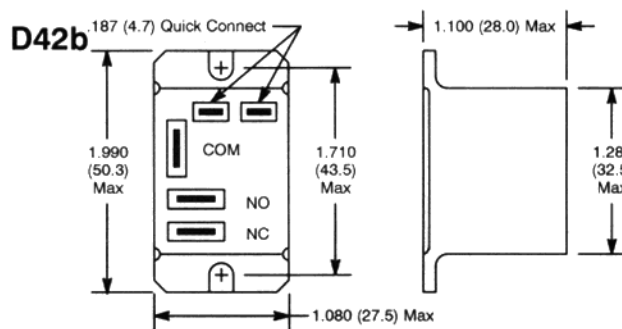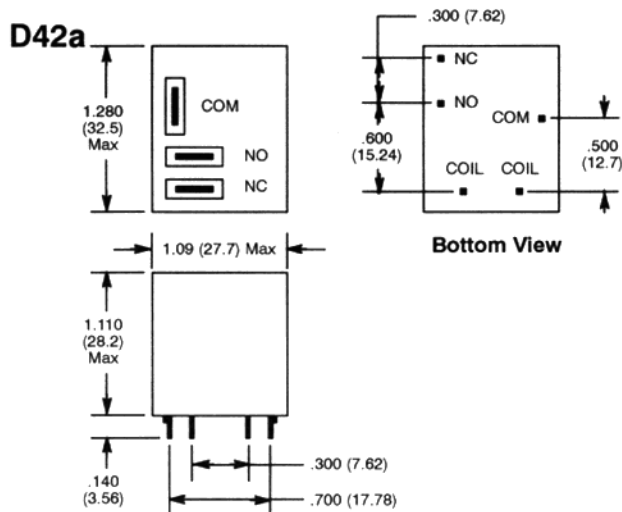

Electrical Specifications

Contact

Rating: 1 Form A (SPST-NO), 30 Amps at 240VAC/28VDC
1 Form C (SPDT), 20 Amps at 240VAC/28VDC

Resistance: See Chart

Coil

Coil Voltages: See Chart

Pick-up Voltage: DC: 75% of Nom., AC: 85% of Nom.

Drop-out Voltage: DC: 10% of Nom., AC: 15% of Nom.

Operational Characteristics

Timing Values Operate Time: DC: 15mS, AC: 20mS
Release Time: DC: 20mS, AC: 15mS

Insulation Characteristics

Dielectric Strength (Initial)

Contact to Contact: 1500VAC/1 minute

Coil To Contact: 1500VAC/1 minute

Environmental Characteristics

Operating: -55°C to +85°C

Storage: -55°C to +125°C

Life

Electrical: 100,000 operations min.

Mechanical: 10 x 10⁶ (100,000,000) operations min.