

RELIFE

SYRINGE TYPE FLUX

No cleaning/Easy to solder/High activity/Free 2 needles + push rod

RL-421S-OR / Advanced BGA flux



No resistance / No conductivity / No repair / No cleaning

Syringe Design

Welding is not wasteful, more precise, and the sealing plug can be reused many times after use.



The Thinness Is Good And The Application Is More Even

Suitable for welding on metals such as general instruments,
meters, tubes, tin, iron, etc.



Good wettability




Exquisite paste



Bright Solder Joints

After reflow, there is little residue, light color, no corrosion, high impedance, high purity, long-lasting viscosity, bright solder joints after soldering

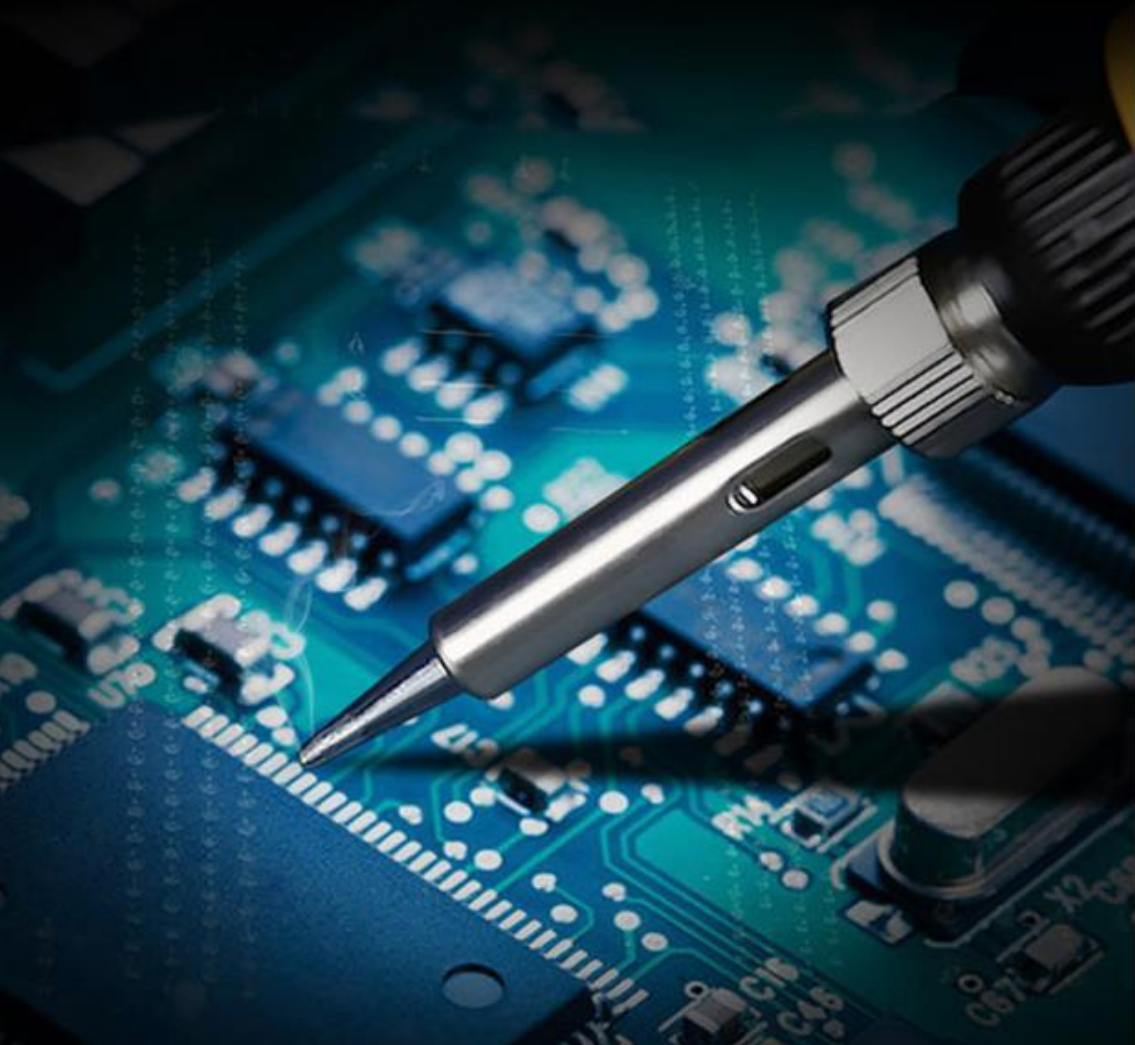


Wide Range Of Applications

Suitable for sensor, wire, SMT repair, circuit welding, tablet phone computer repair, home appliance repair, etc.



Repair drag welding



BGA tin planting



Repair and desoldering



Component welding



Phone Repair



Mobile phone
chip welding



Mobile phone
chip welding



Appliance Repair

PRODUCT INFORMATION

Note: Manual measurement will have \pm tolerance, which is for reference only, please refer to the actual product





BRAND	RELIFE
PRODUCT NAME	Advanced BGA flux
MODEL	RL-421S-OR
PASTE	Yellow
CAPACITY	10cc
GROSS WEIGHT	About 24g/Set
PRODUCT SIZE	110*32*28mm
PACKAGE SIZE	185*70mm/Set
BLACK NEEDLE	Needle length: 13mm/Outer diameter: 1.0mm/Inner diameter: 0.72mm
GREEN NEEDLE	Needle length: 13mm/Outer diameter: 1.2mm/Inner diameter: 0.85mm

STEPS FOR USAGE

The demonstration is only the method, please decide according to the actual situation



01 Turn counterclockwise to open the cap



02 Rotate clockwise and install the needle



03 Open the bottom cover
The white rubber plug in the syringe cannot be removed!



04 Attach the push rod and you are ready to use