

Features

- Schottky Barrier Chip
- Guard Ring Die Construction for Transient Protection
- Low Power Loss, High Efficiency
- High Surge Capability
- High Current Capability and Low Forward Voltage Drop
- Surge Overload Rating to 80A Peak
- For Use in Low Voltage, High Frequency Inverters, Free Wheeling, and Polarity Protection Applications
- **Lead Free Finish, RoHS Compliant (Note 3)**

Mechanical Data

- Case: DO-201AD
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020C
- Terminals: Finish - Tin. Solderable per MIL-STD-202, Method 208 
- Polarity: Cathode Band
- Marking Information: See Page 3
- Ordering Information: See Page 3
- Weight: 1.1 grams (approximate)

Maximum Ratings and Electrical Characteristics @T_A = 25°C unless otherwise specified






Single phase, half wave, 60Hz, resistive or inductive load.
For capacitance load, derate current by 20%.

Characteristic	Symbol	SB370	SB380	SB390	SB3100	Unit
Peak Repetitive Reverse Voltage	V _{RRM}					
Working Peak Reverse Voltage	V _{RWM}	70	80	90	100	V
DC Blocking Voltage	V _R					
RMS Reverse Voltage	V _{R(RMS)}	49	56	63	70	V
Average Rectified Output Current (Note 1) @ T _L = 80°C	I _O	3.0				A
Non-Repetitive Peak Forward Surge Current 8.3ms Single Half Sine-Wave Superimposed on Rated Load	I _{FSM}	100				A
Forward Voltage @ I _F = 3.0A	V _{FM}	0.79				V
Peak Reverse Current @ T _A = 25°C	I _{RM}	0.5				mA
at Rated DC Blocking Voltage @ T _A = 100°C		20				
Typical Junction Capacitance (Note 2)	C _j	250				pF

Thermal Characteristics

Characteristic	Symbol	SB370	SB380	SB390	SB3100	Unit
Typical Thermal Resistance Junction to Ambient	R _{θJA}	20				K/W
Operating and Storage Temperature Range	T _J , T _{STG}	-65 to +150				°C

- Notes:
1. Measured at ambient temperature at a distance of 9.5mm from the case.
 2. Measured at 1.0 MHz and applied reverse voltage of 4.0V DC.
 3. RoHS revision 13.2.2003. Glass and high temperature solder exemptions applied, See *EU Directive Annex Notes 5 and 7*.

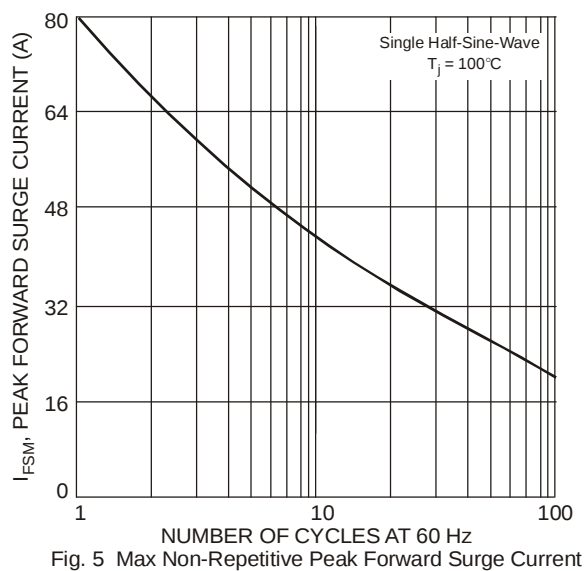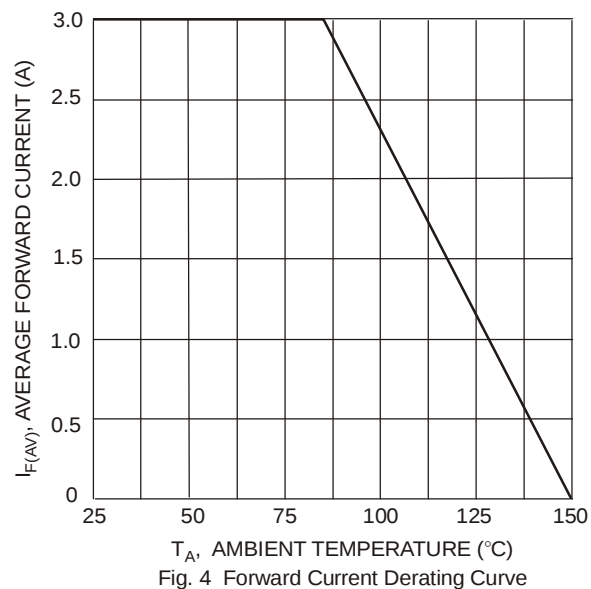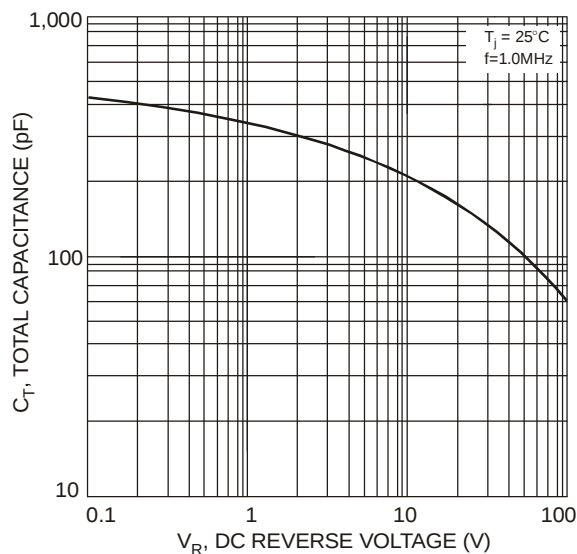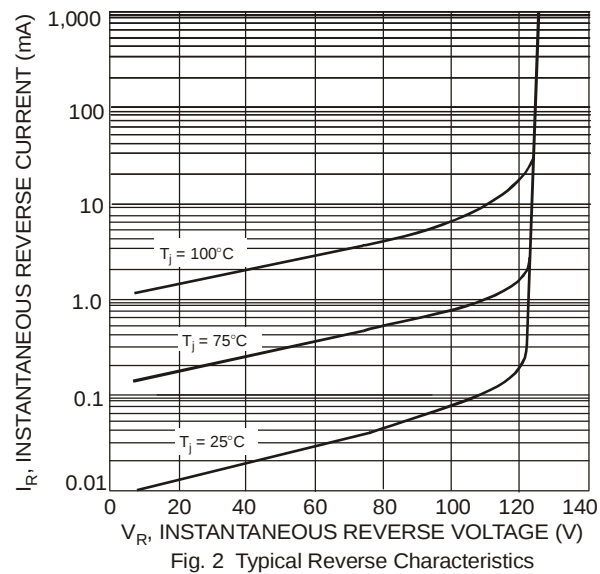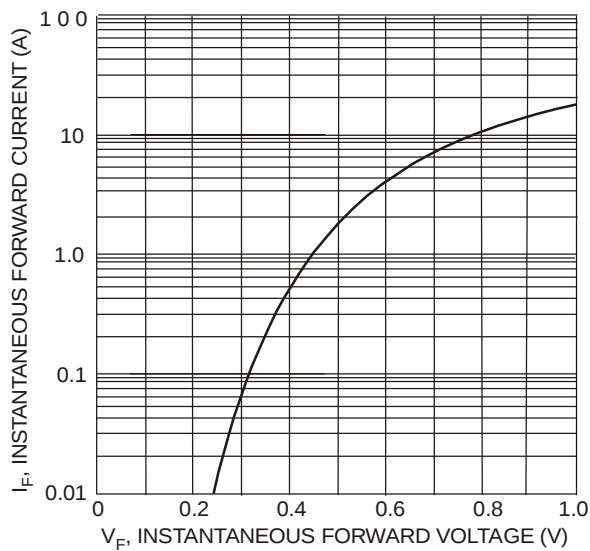


Ordering Information (Note 4)

Part Number	Case	Packaging
SB370-B	DO-201AD	500/Bulk
SB370-T	DO-201AD	1.2K/Tape & Reel, 13-inch
SB380-B	DO-201AD	500/Bulk
SB380-T	DO-201AD	1.2K/Tape & Reel, 13-inch
SB390-B	DO-201AD	500/Bulk
SB390-T	DO-201AD	1.2K/Tape & Reel, 13-inch
SB3100-B	DO-201AD	500/Bulk
SB3100-T	DO-201AD	1.2K/Tape & Reel, 13-inch

Notes: 4. For packaging details, go to our website at <http://www.diodes.com/datasheets/ap02007.pdf>.

Package Outline Dimensions

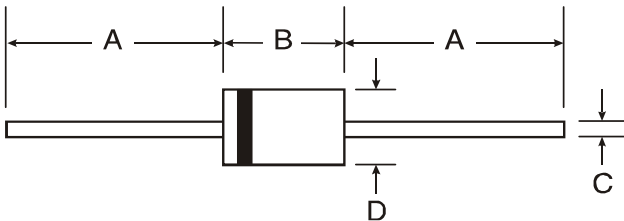

DO-201AD		
Dim	Min	Max
A	25.40	—
B	7.20	9.50
C	1.20	1.30
D	4.80	5.30
All Dimensions in mm		