

# ST-60/ST-80

## Digital Soldering Station

### Features

- 3 sets shortcut temperature to simplify operations.
- Support temp lock, temp calibration function.
- Smart standby and shutdown function, conserves energy and protect equipment.

### Specification


Model	ST-60	ST-80
Voltage	AC 230V±10% 50Hz (110V±10% 60Hz)	
Power	60W	80W
Temperature Range	150°C~480°C	
Heating Principle	Resistance heating	
Handle Model	SP-60	SP-80
Heater	Dual-core ceramic heater HS-3060A	Four-core ceramic heater HS-3080
Soldering Tips	T900 Series	
Tip-to-ground Resistance	≤2Ω	
Tip-to-ground Potential	≤2mV	
Dimension(Host)	175(L)x115(W)x95(H)mm	
Weight(Host)	≈1.28kg	≈1.71kg

### Package List

Model	Package List
ST-60	Main unit x1 Soldering iron handle x1 Iron stand x1
ST-80	Power cord x1 User manual x1 Certificate x1



### Replacement of Heating Components

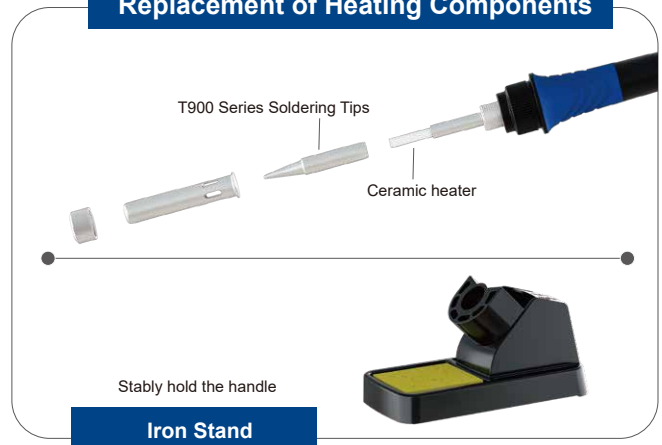

### Optional Tips

#### T900



(Applicable model: ST-60 ST-80 ST-2090D AT-969 AT-989D ST-2065D)

 T900-B	 T900-LB	 T900-SB	 T900-PB	 T900-I	 T900-0.2SI	 T900-SI	 T900-0.5C	 T900-0.8C	 T900-1C
 T900-2C	 T900-3C	 T900-4C	 T900-1.6K	 T900-K	 T900-2.0SK	 T900-SK	 T900-0.2IS	 T900-0.5IS	
 T900-IS	 T900-0.8D	 T900-1.2D	 T900-1.6D	 T900-2.4D	 T900-3.2D	 T900-2.0CM	 T900-3.0CM		